


# SILVER - MARSHALL MFG. CO.

## MODEL 729 SW

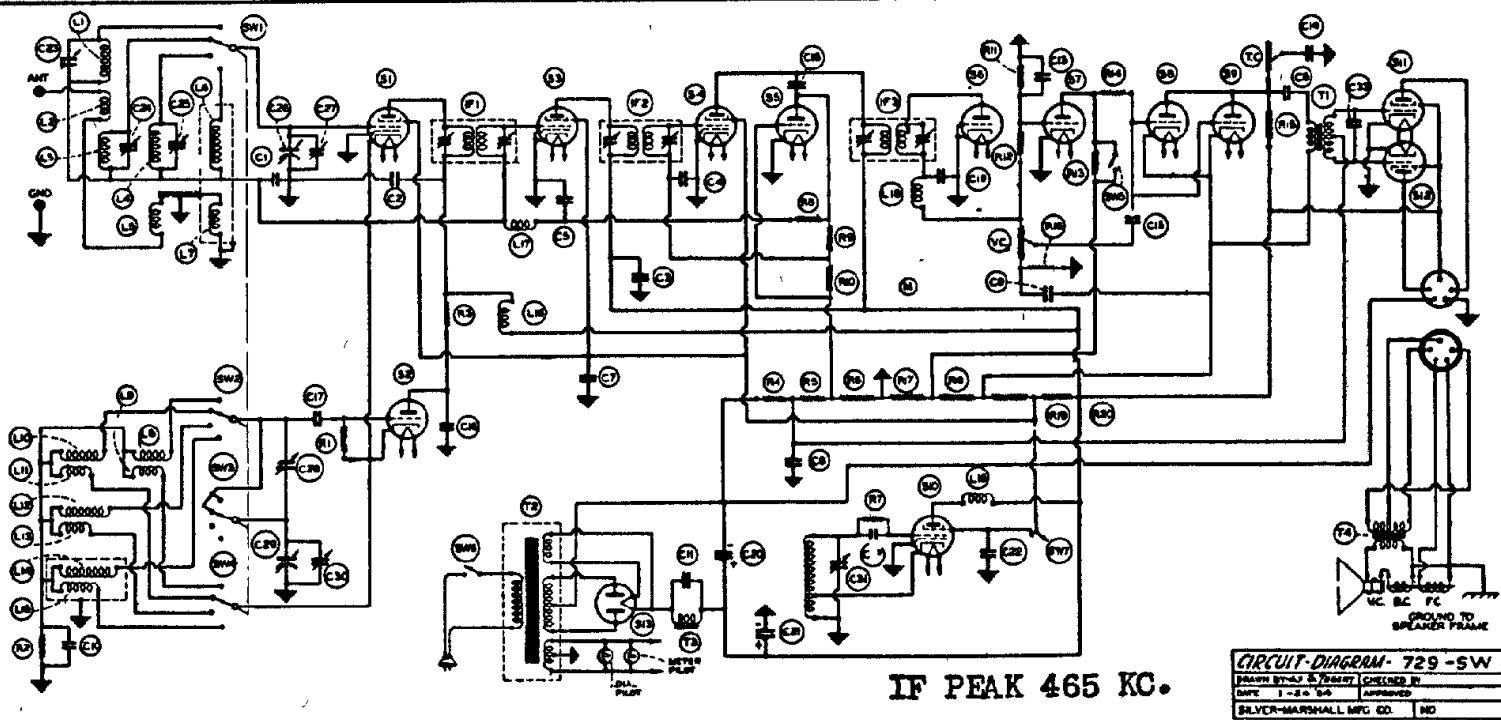

# Model 729-SW Superheterodyne

### RESISTANCES

R1-	100,000	- 1/2 watt
R2-	150	- 1/2 "
R3-	3,000	- 2 "
R4-	250,000	- 1 "
R5-	60,000	- 1 "
R6-	11,000	- 1 "
R7-	100,000	- 1/2 "
R8-	500,000	- 1/2 "
R9-	1,000,000	- 1/2 "
R10-	1,000,000	- 1/2 "
R11-	1,000,000	- 1/2 "
R12-	2,000,000	- 1/2 "
R13-	300,000	- 1/2 "
R14-	1,000,000	- 1/2 "
R15-	8,000	- 1 "
R16-	100,000	- 1 "
R17-	2,600	- "
R18-	340	- Wire Wound
R19-	1,840	- "
R20-	5,750	- "
V. C. with A. C. Switch,		
500,000 ohms with log taper.		
T. C. Tone Control 5,000 tapered.		

### TUBES

S1-	58 1st Detector
S2-	56 Oscillator
S3-	58 1st Int. Amp.
S4-	58 2nd Int. Amp.
S5-	56 A. V. C.
S6-	56 2nd Detector
S7-	56 Quiet A. V. C.
S8-	56 1st Audio Driver
S11, S12-	2A5 Push-Pull Output
S13-	523 Rectifier

### TRANSFORMERS

T1-	CE-1038 Audio Transformer
T2-	CE-1008 Power Transformer
T3-	CE-1007 Power Choke Coil
T4-	(CE-1013 Output Trans. with 10" speaker
(CE-1037 Output Trans. with Auditor'sum speaker	

### COILS

L1, L2, L3-	R.F. and antenna coil - purple and green SW ranges
L4, L5-	R.F. and antenna coil - red SW range
L6, L7-	R.F. and antenna coil - black BC range
L8, L9, L10, L11-	Oscillator and cathode coils - purple and green SW ranges
L12, L13-	Oscillator and cathode coils - red SW range
L14, L15-	Oscillator and cathode coils - black BC range
L16, L17, L18, L19-	15 m.h. R. F. chokes

### SWITCHES

SW1, SW2, SW3, SW4-	Frequency Range Switch
SW5-	Switch for Quiet AVC Circuit
SW6-	Power Switch on Volume Control
SW7-	Switch for "Beat Note" Oscillator

### CONDENSERS

C1-	.01 mfd 200V Paper	C8-	.5 mfd 400V Paper
C2-	.25 " 400V "	C9-	.5 " 400V "
C3-	.5 " 400V "	C10-	.1 " 200V "
C4-	.01 " 200V "	C11-	.15 " 400V "
C5-	.01 " 200V "	C12-	.0001 " Mica
C6-	.1 " 400V "	C13-	.0025 " 200V "
C7-	.5 " 400V "	C14-	.25 " 400V "
C15-	.01 " 200V "		
C16-	.00025 Mica		
C17-	.00005 "		
C18-	.002 "		
C19-	.0001 "		
C20-	8 mfd 450V Dry Electrolytic		
C21-	12 " 450V "		
C22-	.002 Mica		
C23-	20-65 mmf Adjustable Mica		
C24-	6-30 " " "		
C25-	25-65 " " "		
C26, C27, C29, C30-	Adjustable Air Condenser 410 mmf		
C28-	Adjustable Mica Condenser 350-500 mmf		
C31-	" " " 70-125 "		
C33-	.002 Mica Condenser		

SPEAKER - 8,000 ohm F.C., D-19 Type, or A DeLuxe