


Model J (1931)

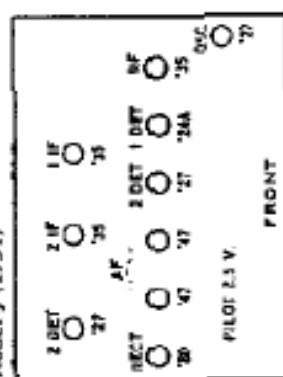

- C1-C2-C3 - Variable Cond. 365 Nmfd. Max. 13189
 C4 - Oscillator Tripper 16097
 C5 - Triple 0.1 Mfd. Cond. 3316
 C6 - 0.1 Mfd. Cond. 200 V. Rating 3220
 C7 - 0.1 Mfd. Cond. 200 V. Rating 3220
 C8 - .5, .5, 1.0 Mfd. Cond.
 C9 - (10, 300 V. 0.5, 0.5-200 V.) 13140
 C10 - .00015 Mfd. Cond. Mica
 C11 - .06 Mfd. Cond.
 C12 - 0.18 Mfd. Cond.
 C13 - 0.1 Mfd. Cond. 200 V. Rating
 C14 - Two 4 Mfd. (Dry Electro.) 450 V. Rating
 C15 - One 8 Mfd. (" ")
 C16 - 0.1 Mfd. Cond. 200 V. Rating

- R1 - 500,000 Ohm Resistor 1 Watt Carbon
 R2 - 30,000 Ohm Resistor 1 Watt Carbon
 R3 - 1 Megohm Tapered variable resistor
 R4 - 30,000 Ohm Resistor 1 Watt Carbon
 R5 - 120 Ohm Resistor Wire Wound
 R6 - 10,000 Ohm Resistor 1 Watt Carbon
 R7 - 10,000 Ohm Resistor 3 Watt Carbon
 R8 - 100 Ohm 1800 Ohm tapped resistor
 R9 - 1700 Ohm
 R10 - 220 Ohm Resistor 2 Watt Carbon

- T1 - C-1 I.F. Transformer
 T2 - C-2 " " "
 T3 - C-3 " " "
 T4 - A-270 Input Transformer
 T5 - 10143 Output Transformer
 T6 - 10176 Power Transformer

- L1 - 182 Antenna Coil
 L2 - 178 R.F. Coil
 L3 - 179 Osc. Coil
 L4 - 281 R.F. Choke
 L5 - 10145 Choke
 S2 - 124 Tube
 S3-S6-S7 - 127 "
 S8-S9 - 147 "
 S1-S4-S5 - 151 "
 S10 - 180 "

P-4500 Ohm Potentiometer (Combination)
 SW-On-Off A.C. Switch (Combined with Pot)