


SILVER - MARSHALL MFG. CO.

MODEL 4801, 4802
Schematic, Voltage
Parts List

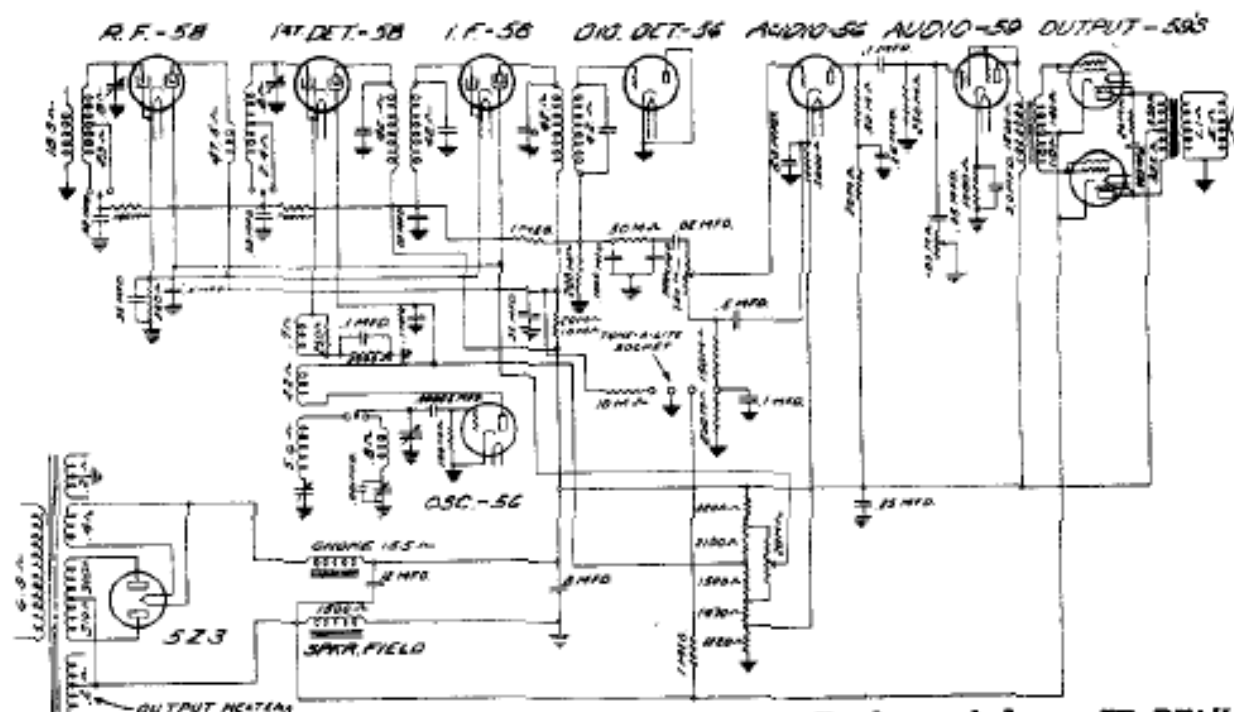

I.F. = 175 KC.

Early models - IF PEAK 465 KC.
Later models - IF PEAK 175 KC.

		Ef	Ep	Eg	Ek	Esg	Esug	Ip
58	RF	1.9	180	.2	2	72	0	3.7
58	1st Det	1.9	230	1.2	6.5	100	0	2.6
56	Osc.	1.9	105	.1	0			5.5
58	IF	1.9	180	.2	2	72	0	3.5
56	Diode Det.	1.9	0	.3	0			0
56	1st AF	1.9	103	.1	42			1.3
59	2nd AF	2.1	190	3.5	19	190	190	16.5
59	Class B1	2.1	350	0	108	350	0	7
59	Class B2	2.1	350	0	108	350	0	7
5Z3	Rect.	4.5	390*					43*

* - per plate
* - Per Plate
Vol. Cont. - Full On
Line - 110 volts

PART NUMBER	DESCRIPTION	LIST PRICE
P-1038	Pilot Light	.45
P-1100-A	.001 Mfd. Condenser	.25
P-1108	10,000 Resistor, 1 Watt	.35
P-1331	.0005 Mfd. Condenser	.50
P-1665	2,000 Ohm Resistor	.25
P-1729	.00005 Mfd. Condenser	.40
P-1999	10,000 Ohm Resistor	.25
P-4169	Blinder	.10
P-4182	Felt Washer	.05
P-4200	5,000 Ohm Resistor	.30
P-4259	Tone Control and Switch	1.75
P-4260	Volume Control	1.25
P-4262	56 Sockets	.25
P-4264	58 Sockets	.25
P-4301	Field Coil	2.50
P-4405	Tube Shield	.15
P-4408	Tube Shield Caps	.10
P-4407	Tube Shield Case	.10
P-4514	12 Mfd. - 8 Mfd. Dual Electrolytic	2.85
P-4505	Dual 5 Mfd. Condenser	1.50
P-4595	1 Meg. Resistor	.25
P-4597	250 Ohm Resistor	.25
P-4640	.25 Mfd. Condenser	.20
P-4644	.05 Mfd. Condenser	.20
P-4646	.02 Mfd. Condenser	.25
P-4650	50,000 Ohm Resistor	.25
P-4662	100,000 Ohm Resistor	.25
P-4664	200,000 Ohm Resistor	.25
P-4701	.10 Mfd. Condenser	.30
P-4701	.5 Mfd. Condenser	.40
P-4790	Small Knobs	.25
P-4801	Large Knobs	.25
P-4804	Escutcheon Plate	.60
P-4805	59 Sockets	.15
P-4809	20,000 Ohm Resistor	.25
P-4911	.25 Mfd. Condensers	.35
P-4914	5Z3 Socket	.25
P-4915	Tune-A-Lite	3.00
P-4917	Tune-A-Lite Socket	.65
P-4919	Switch - Wave Change	1.00
P-4923	Noise Control	1.00
P-4924	Tune-A-Lite Bracket	.15
P-4925	Canopy Mtg. Studs	.10
P-4929	Tune-A-Lite Blinder	.15
P-4933	20,000 Ohm Resistor	.25
P-4931	250,000 Ohm Resistor	.25
P-4932	150,000 Ohm Resistor	.25
P-4933	1,000 Ohm Resistor	.25
P-4934	.003 Mfd. Condenser	.35
P-4937	Wing Bolts	.10
P-4952	Wing Nuts	.05
P-4957	Diaphragm	.50
G-1261	Primary Coil Assembly (R.F. Coil)	.75
G-1262	Primary Coil Assembly (Ant. Coil)	.40
G-1376	Single Insulated Trimmer	.75
G-1401	Gang Condenser	5.00
G-1423	Trimmer Assembly	.75
G-1466	Padding Condenser	.75
G-1600	Voice Coil and Spider	.65
G-1669	Filter Choke Assembly	1.75
G-1706	10" Speaker	6.00
G-1776	Power Transformer Assembly	4.50
G-1776-A	Power Transformer 25 Cycle	5.25
G-1776-B	Power Transformer 220 Volt	5.00
G-1777	Output Transformer Assembly	2.00
G-1778	Input Transformer	2.50
G-1799	R.F. Units	4.00
G-1792	1st I.F. Transformer	2.50
G-1793	I.F. Coil and Bowl Assembly (G-1792)	1.25
G-1794	2nd I.F. Transformer	2.00
G-1795	Unit Assembly	.90
G-1797	Canopy	1.00
G-1803	R.F. Coil Assembly	.80
G-1804	Oscillator Coil Assembly	.90