


DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
R-1	N-4025	22,000 OHM .5 W. 20%	1	N-4815	ANTENNA COIL LOOP
R-2	N-4023	82 OHM 2 W. 10%	2	N-4810	OSCILLATOR COIL
R-3	N-1262	1 MEGOHM .5 W. 20%	3	N-4813	1ST I.F. TRANSFORMER
R-4	N-4843	.5 MEGOHM VOL. CONT.	4	N-4846	2ND I.F. TRANSFORMER
R-5	N-4028	6.8 MEGOHM .5 W. 20%	5	N-4318	4" SPEAKER
R-6	N-4026	220,000 OHM .5 W. 20%	6	N-3899	OUTPUT TRANSFORMER
R-7	N-4027	470,000 OHM .5 W. 20%			
R-8	N-4024	220 OHM .5 W. 10%			
R-9	N-3341	1000 OHM .5 W. 10%			
R-10	N-4022	33 OHM .5 W. 20%			
R-11	N-4026	220,000 OHM .5 W. 20%			
R-12		(IN VOLUME CONTROL)			
C-1	N-1345	.05 MFD. 200 V.			
C-2	N-1345	.05 MFD. 200 V.			
C-3	N-1346	.05 MFD. 400 V.			
C-4	N-374	100 MMFD. MICA.			
C-5	N-2712	.004 MFD. 400 V.			
C-6	N-4447	.0005 MFD. 400 V.			
C-7	N-1344	.01 MFD. 400 V.			
C-8	N-1376	.02 MFD. 400 V.			
C-9	N-3302	35 MFD. 150 V.			
C-10		30 MFD. 150 V.			

NOTE: VOLTAGES SHOWN ARE FROM TERMINAL TO BUSS----- HEATER VOLTAGES ARE A.C. WHEN LINE VOLTAGE IS ALTERNATING.

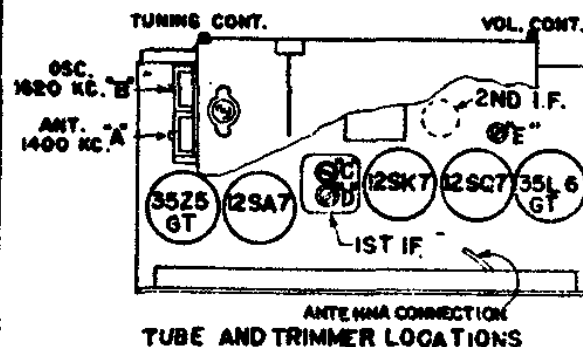

# Sonora Radio & Television Model RBU

I.F. 455 KC.