


SONORA RADIO & TELEV., CORP MODELS TE38,TE40,TE41

Phono

MODELS KWU78, KWU79

Phono

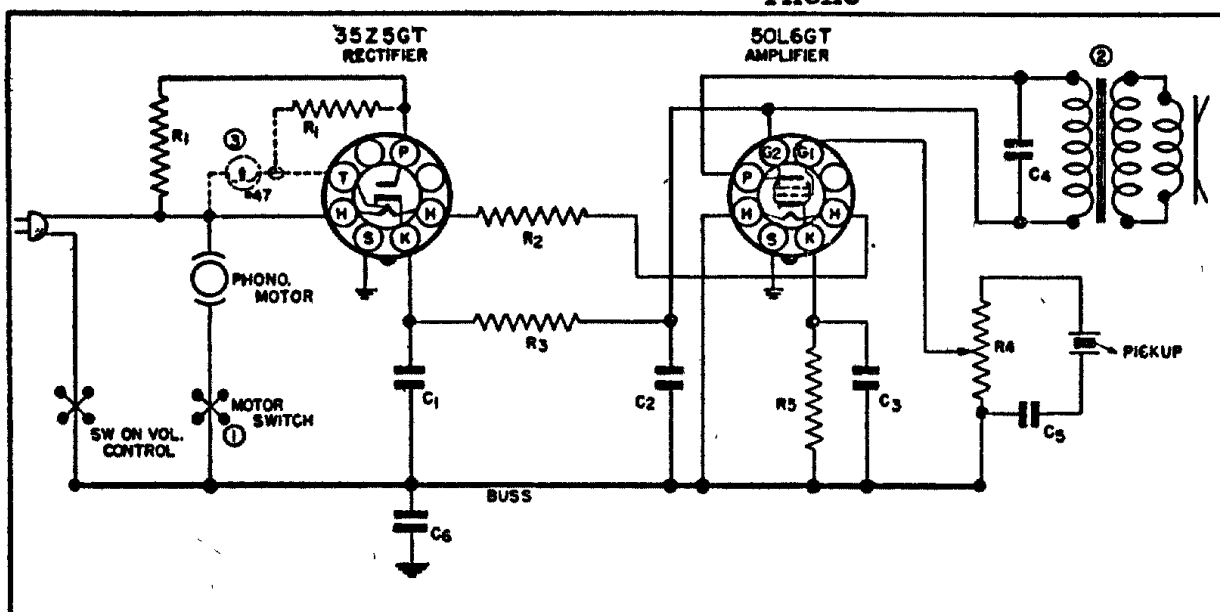


DIAG NO.	PART NO.	DESCRIPTION	DIAG NO.	PART NO.	DESCRIPTION
R1	N-1742	25 OHMS .5W. 20%	①	N-364	ROTARY SNAP SW. ON KWU-78
R2	N-3488	220 OHMS ARMORED .5 W.		N-3549	AUTOMATIC STOP SW ON KWU-79
R3	N-1867	500 OHMS 2W. 20%			
R4	N-3248	.5 MEG. VOL. CONT. KWU-78	②	N-2914	4" RM. SPEAKER KWU-78
R5	N-1864	.5 MEG. VOL. CONT. KWU-79		N-3658	OUTPUT TRANS. KWU-78
	N-1350	150 OHMS .5W. 10%		N-329	5/8" PM. SPEAKER KWU-79
				N-3568	OUTPUT TRANS. KWU-79
C1		40 MFD. 150V.	③		G.E. NO.47 PILQT LAMP USED ON KWU-79 ONLY. CONNECTIONS SHOWN IN DOTTED LINES USED ON KWU-79 ONLY.
C2	N-3617	40 MFD. ELECTRO. 15 OV.			
C3		20 MFD. 25 V.			
C4	N-1344	.01 MFD. 400V.			
C5	N-1345	.05 MFD. 200V.			
C6	N-1345	.05 MFD. 200V.			

ELECTRIC PHONOGRAPH

DRAWN W.J.F. APP'D. *W.J.F.*

AUG 7, 1940.

KWU78, KWU79

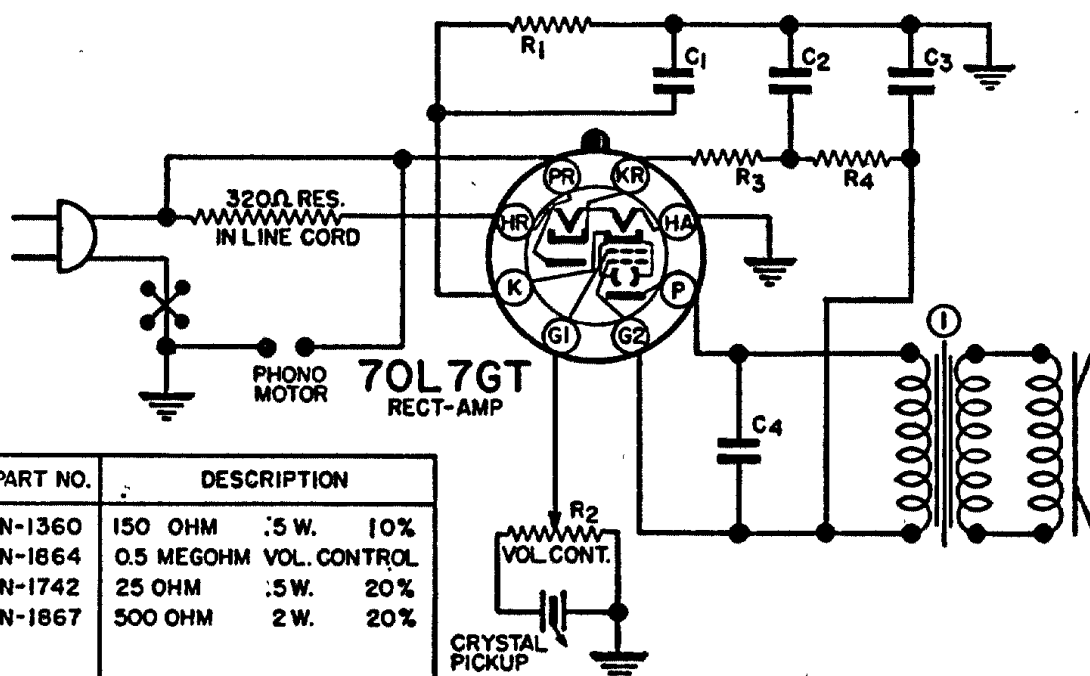

DIAG NO.	PART NO.	DESCRIPTION
R1	N-1360	150 OHM .5 W. 10%
R2	N-1864	0.5 MEGOHM VOL. CONTROL
R3	N-1742	25 OHM .5W. 20%
R4	N-1867	500 OHM 2W. 20%
C1	N-1866	20MFD. 25V. } ELECTRO.
C2		30 MFD. 150V. }
C3		30 MFD. 150V. }
C4	N-1344	.01 MFD. 400V.
1	N-1863	5 1/2" P.M. SPEAKER (TE-38)
	N-1865	LINE RES. CORD
1	N-1910	5 1/2" P.M. SPKR. (TE-40 & 41)

ELECTRIC PHONOGRAPH

DRN. J.B. APP'D. *J.B.* 5-9-39

TE-38,40 & 41