


**Sonora**  
Clear as a Bell

## MODEL RY

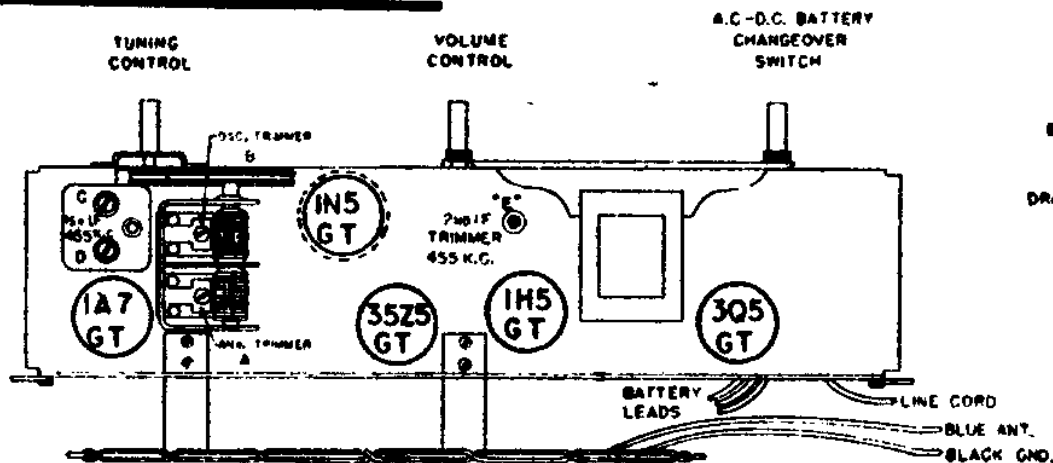

I.F. 455K.C.

5 TUBE  
BATTERY 8 110-120 V. A.C.-D.C.  
SUPERHETERODYNE

DRAWN *L.B.* APP. *L.B. Dwy*

NOVEMBER, 1945

DIAG. NO.	PART NO.	DESCRIPTION	DIAG. NO.	PART NO.	DESCRIPTION
C1	N-1345	.05 MFD. 200WV. 20%	R1	N-4026	220,000 OHM .5W. 20%
C2	N-1345	.05 MFD. 200WV. 20%	R2	N-420	68,000 OHM .5W. 20%
C3	N-1360	.2 MFD. 200 WV. 10%	R3	N-1263	10 MEGOHM .5W. 20%
C4	N-1351	.1 MFD. 200 WV. 20%	R4	N-4280	560 OHM .5W. 10%
C5	N-1376	.02 MFD. 400WV. 20%	R5	N-4277	2.2 MEGOHM .5W. 20%
C6	N-1374	.0001 MFD. MICA 20%	R6	N-4277	2.2 MEGOHM .5W. 20%
C7	N-4894	.005 MFD. 800WV. 5-40V	R7	N-4063	47,000 OHM .5W. 20%
C8	N-1374	.0001 MFD. MICA 20%	R8	N-3940	1 MEG. VOLUME CONT.
C9	N-1344	.01 MFD. 400WV. 20%	R9	N-1262	1 MEGOHM .5W. 20%
C10	N-1346	.05 MFD. 400WV. 20%	R10	N-5053	12 OHM .5W. 10%
C11	N-2063	.003 MFD. 800WV. -15 +40V	R11	N-4420	330 OHM .5W. 10%
C12		.00 MFD. 7.5 V. ELECT.	R12	N-4277	2.2 MEGOHM .5W. 20%
C13	N-2748	.00 MFD. 150V. OLYTIC	R13	N-1776	1,500 OHM .5W. 20%
C14		.00 MFD. 150V. COND.	R14	N-1692	100 OHM 1W. 10%
C15	N-5232	.00 MFD. 7.5 V. ELECT.	R15	N-3342	550 OHM 12.5W. 10%
C16	N-1351	.1 MFD. 200WV. 20%	R16	N-5054	2,150 OHM .5W. 5%
1	N-5084	LOOP ANTENNA COIL	R17	N-1776	1,500 OHM .5W. 20%
2	N-4812	TWO GANG COND.	R18	N-5052	2,200 OHM .5W. 20%
3	N-5122	OSCILLATOR COIL	R19	N-4988	220,000 OHM .5W. 20%
4	N-2647	FIRST I.F. TRANS.			
5	N-5082	SECOND I.F. TRANS.			
6	N-4149	CHANGEOVER SWITCH			
7	N-5168	5" PM SPEAKER & TRAN.			