
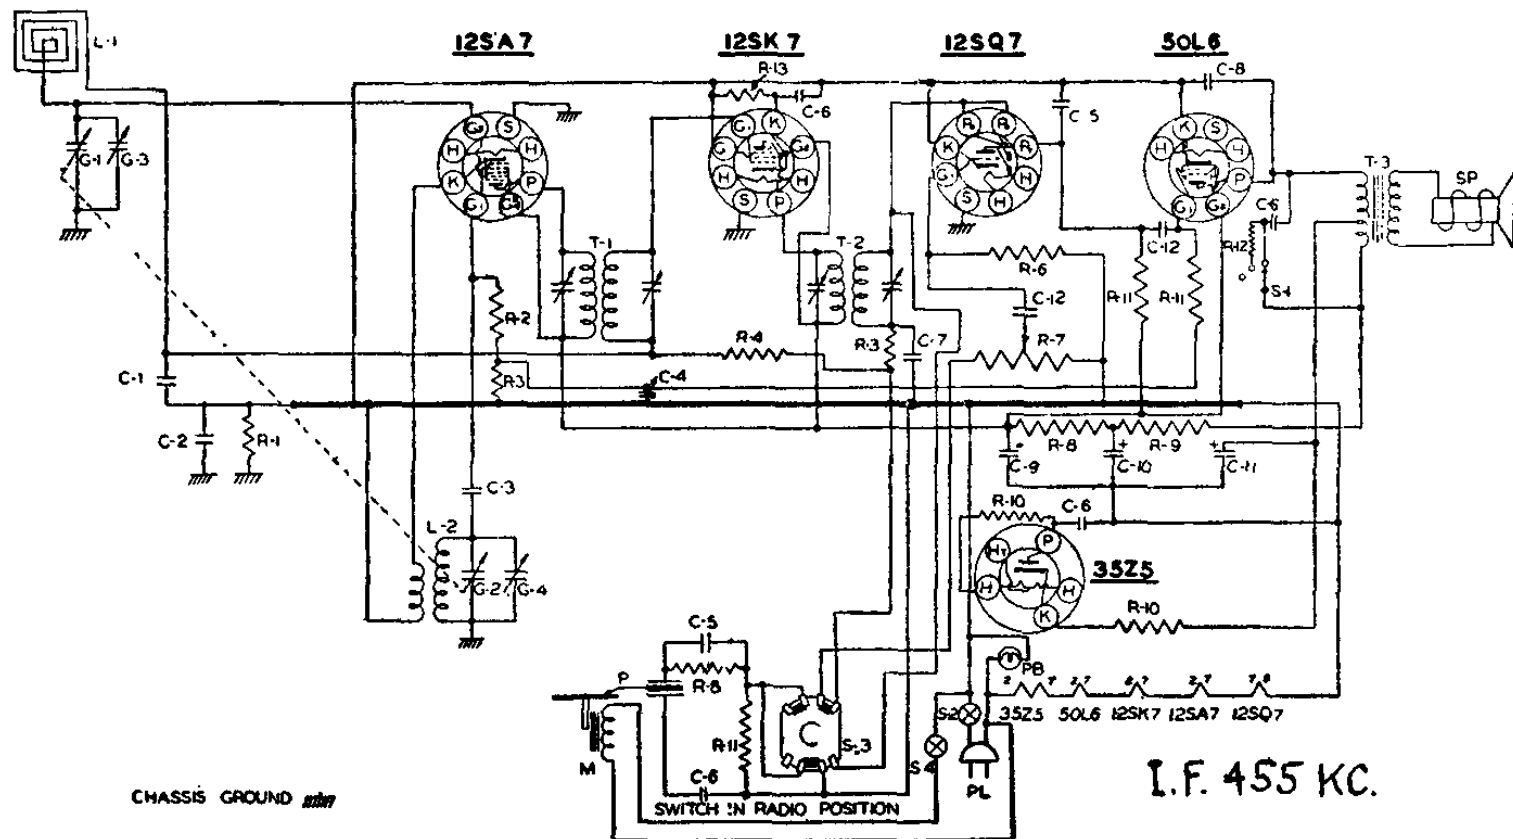


TRAV-LER

Model 5210

TUBE AND TRIMMER LOCATION

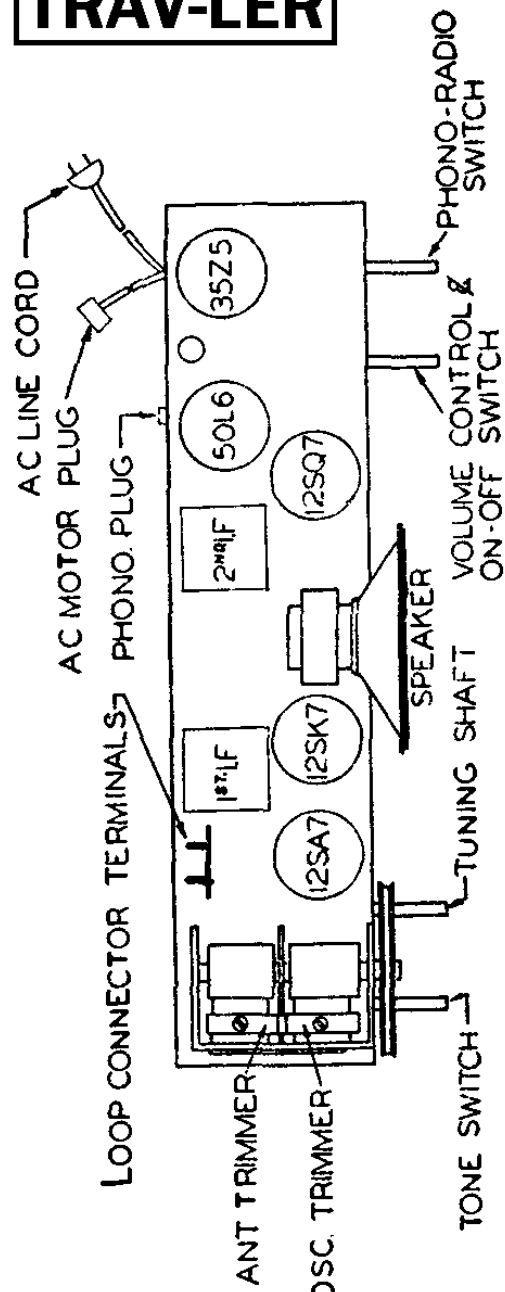

CHASSIS GROUND

I.F. 455 KC.

PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
PC-2	C-1 05MFD CONDENSER 200V	IR-1	R-8 470 \sim RESISTOR 1/2W 20%	SW-2	S-1 TONE SWITCH
PC-8	C-2 1MFD. CONDENSER 400V	IR-42	R-9 1000 \sim RESISTOR 1W 10%	S-2	S-2 SWITCH ON VOLUME CONTROL
MC-4	C-3 00005MFD. MICA	IR-17	R-10 33 \sim RESISTOR 1/2W 20%	S-3	S-3 PHONO-RADIO SWITCH
PC-4	C-4 25MFD. CONDENSER 200V	IR-11	R-11 470M \sim RESISTOR 1/2W 20%	S-4	S-4 SWITCH ON RECORD CHANGER
MC-5	C-5 0005MFD. MICA	IR-15	R-12 2200 \sim RESISTOR 1/2W 20%	M	M RECORD CHANGER MOTOR
PC-5	C-6 05MFD. CONDENSER 400V	IR-21	R-13 330 \sim RESISTOR 1/2W 20%	P	P CRYSTAL PICKUP ARM. CARTRIDGE S-1
MO-2	C-7 0001MFD. MICA	GC-5	G-1 G-2 GANG CONDENSER	PB-2	PB-2 110V 7 1/2W PILOT BULB
PC-7	C-8 01MFD CONDENSER 400V	G-3	G-3 ANT TRIMMER	CO-2	CO-2 LINE CORD
EC-14	C-9 20MFD.	G-4	G-4 OSC TRIMMER		
PC-6	C-10 40MFD. 150WV ELECTROLYTIC				
IR-20	C-11 40MFD.				
IR-9	C-12 005MFD. CONDENSER 600V	LI-6	T-1 INPUT IF TRANSFORMER		
IR-10	R-1 220M \sim RESISTOR 1/2W 20%	LI-7	T-2 OUTPUT IF TRANSFORMER		
IR-23	R-2 22M \sim RESISTOR 1/2W 20%		T-3 OUTPUT TRANSFORMER		
IR-12	R-3 47M \sim RESISTOR 1/2W 20%				
IR-13	R-4 33MEG \sim RESISTOR 1/2W 20%	LL-17	L-1 LOOP ANT		
VC-4	R-5 1MEG \sim RESISTOR 1/2W 20%	LC-4	L-2 OSC. COIL		
	R-6 22MEG \sim RESISTOR 1/2W 20%	SPK-12	SP 5" PM SPEAKER		
	R-7 1MEG. VOLUME CONTROL				