




IP5-GT



IP5-GT

SUPER-CONTROL R-F AMPLIFIER PENTODE

Filament	Coated	
Voltage	1.4	d-c volts
Current	0.05	amp.
Direct Interelectrode Capacitances: ⁰		
Grid to Plate	0.007 max.	μf
Input	3.0	μf
Output	10	μf
Maximum Overall Length	3-5/16"	
Maximum Seated Height	2-3/4"	
Maximum Diameter	1-5/16"	
Bulb	T-9	
Cap	Skirted Miniature-Style C	
Base	Small Wafer Octal 7-Pin, Sleeve	
Pin 1-Base Sleeve	Pin 5-No Connection	
Pin 2-Filament +	Pin 7-Filament -	
Pin 3-Plate	Pin 8-No Connection	
Pin 4-Screen	Cap - Grid	
Mounting Position		Any



BOTTOM VIEW (GT-5Y)

AMPLIFIER

Plate Voltage	110 max.	volts
Screen Voltage	110 max.	volts
<i>Typical Operation and Characteristics-Class A₁ Amplifier:</i>		
Plate	90	volts
Screen	90	volts
Grid	0	volts
Plate Res. (approx.)	0.8	megohm
Transcond.	750	μmhos
Grid Bias for		
Transcond. of 10 μmhos (approx.)	-12	volts
Plate Cur.	2.3	ma.
Screen Cur.	0.7	ma.


⁰ With close-fitting shield connected to negative filament terminal.

IP5-GT



IP5-GT

AVERAGE PLATE CHARACTERISTICS

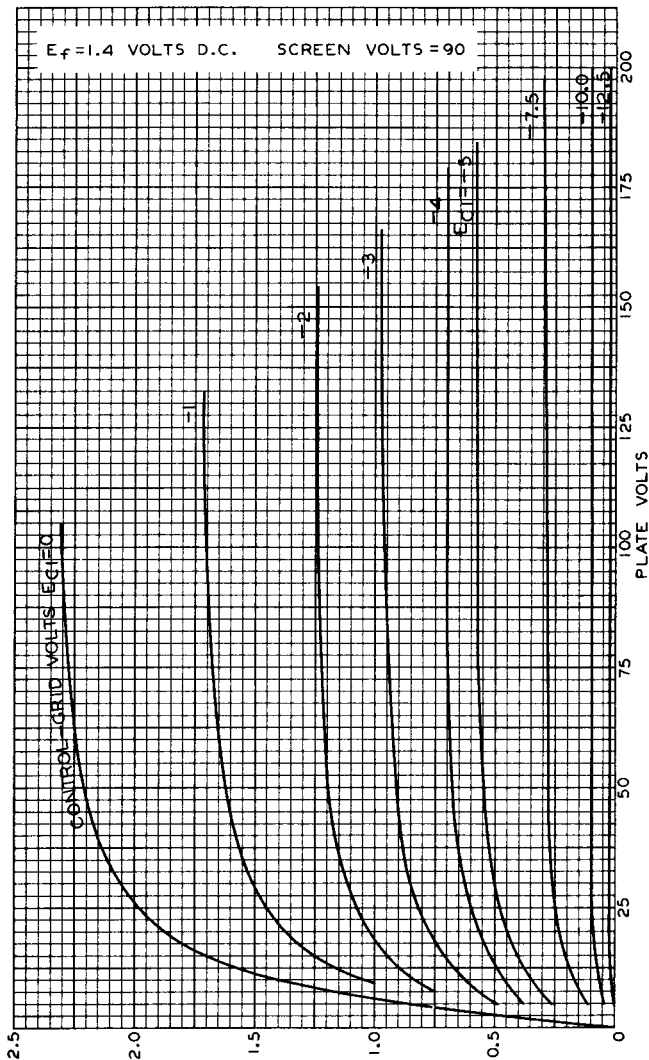

APR. 24, 1941

RCA RADIOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-6276