


# UNITED MOTORS SERVICE

MODEL R-1220

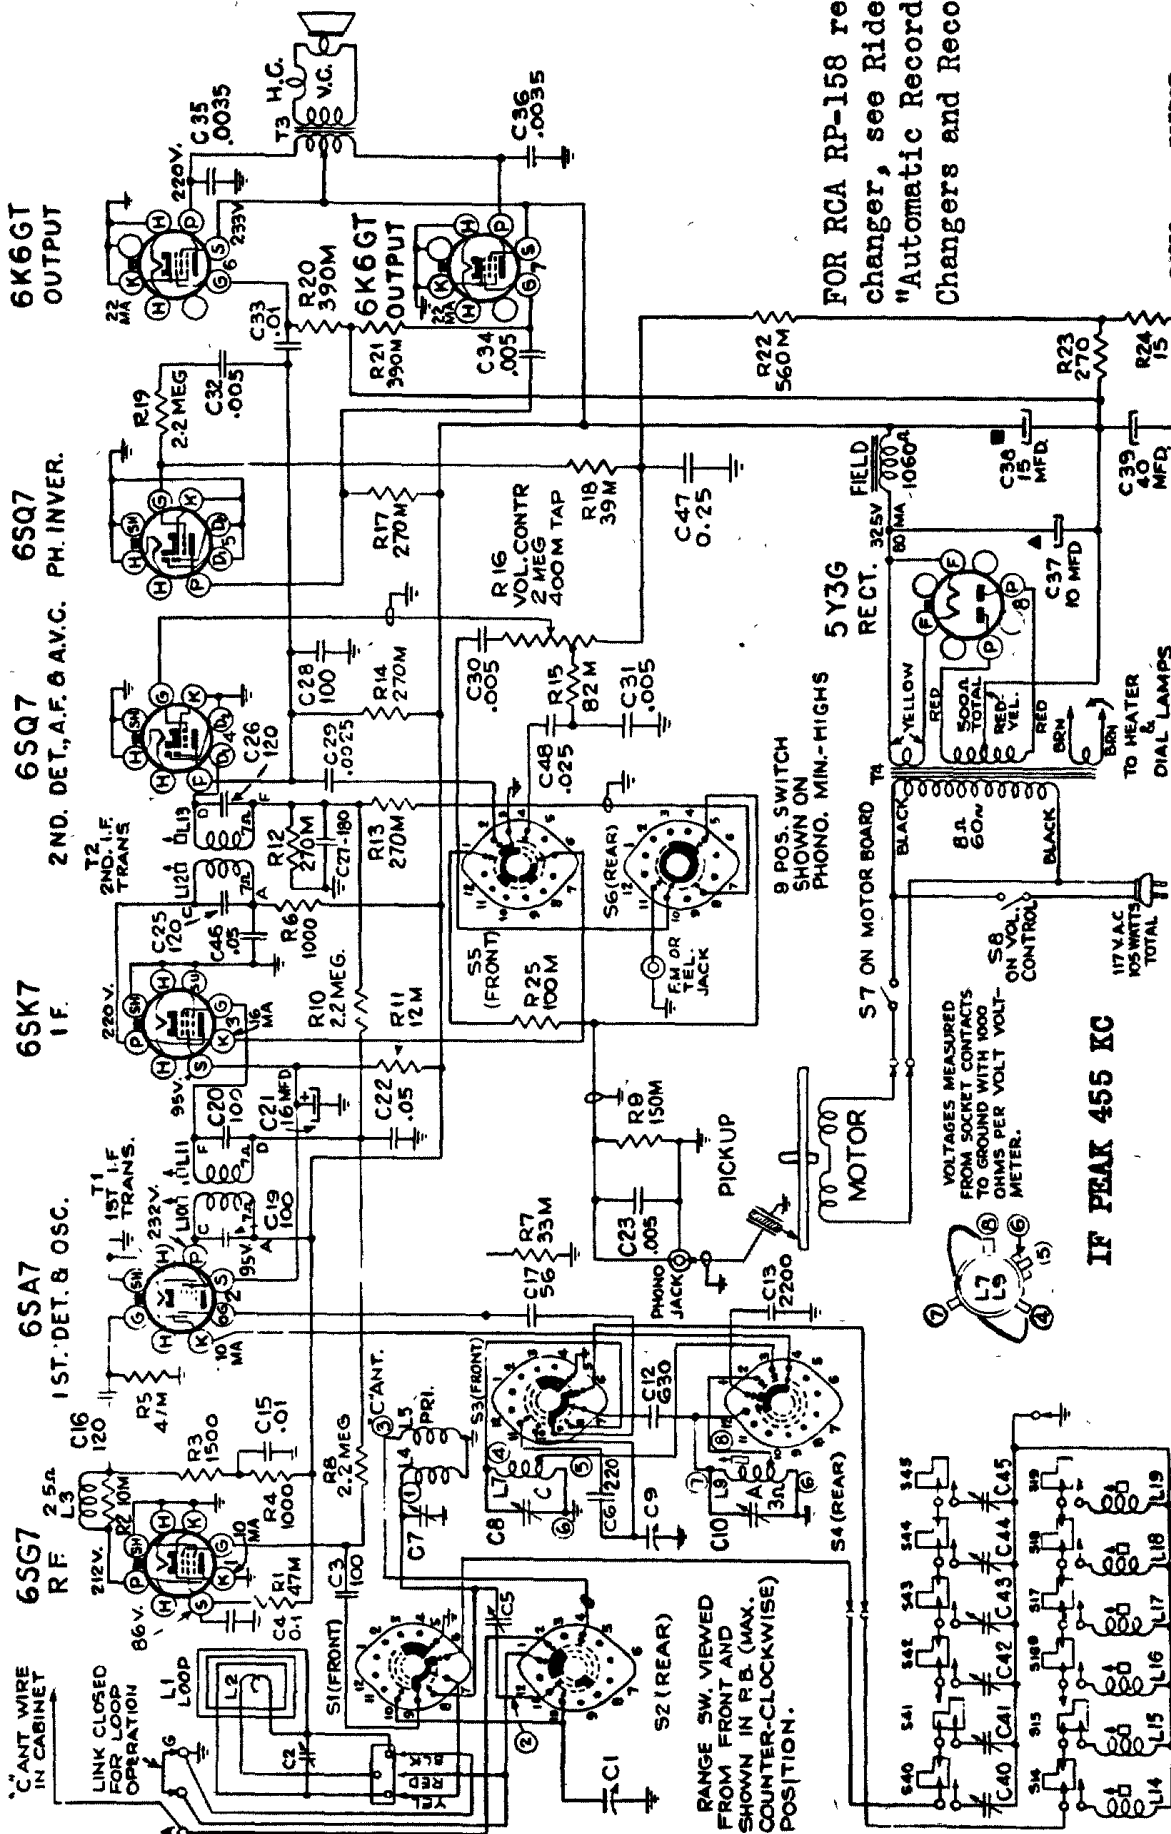

FOR RCA RP-158 record changer, see Rider's "Automatic Record Changers and Recorders"

Tuning Range—  
Broadcast "A" ..... 540-1,600 kc.  
Short Wave "C" ..... 9.4-15.4 mc  
Intermediate Frequency ..... 455 kc  
Power Supply... 105-120 V. 60 cycle AC

Type ..... Automatic  
Record Capacity.. Twelve 10-in., Ten 12-in.  
Turntable Speed ..... 78 r.p.m.  
Type Pickup ..... Crystal  
Motor Power Consumption..... 17 watts

Critical Lead Dress:

1. C30 (audio coupling capacitor to volume control) should be dressed close to front apron.
2. A.C. cord and motor leads must be dressed away from phono. switch up PHONOGRAPH.
3. Dress cable from phono. socket to phono. switch up PHONOGRAPH.
4. Dress red A.C. leads away from I.F. trans. and 65Q7 socket.
5. RF choke in plate of 65G7 must be dressed toward back apron.

