


UNITED MOTORS SERVICE

MODEL 983911

ALIGNMENT FREQUENCIES:
 TRIMMERS A,B,C,D --- 262 KC
 " E 1615 KC
 " F,G 1400 KC
 " H 600 KC

TRIMMER G TO MATCH CAR ANTENNA AT 1400 KC
 ROCK GANG CONDENSER BACK AND FORTH THROUGH SIGNAL DURING
 600-KC ADJUSTMENT OF SCREW H.

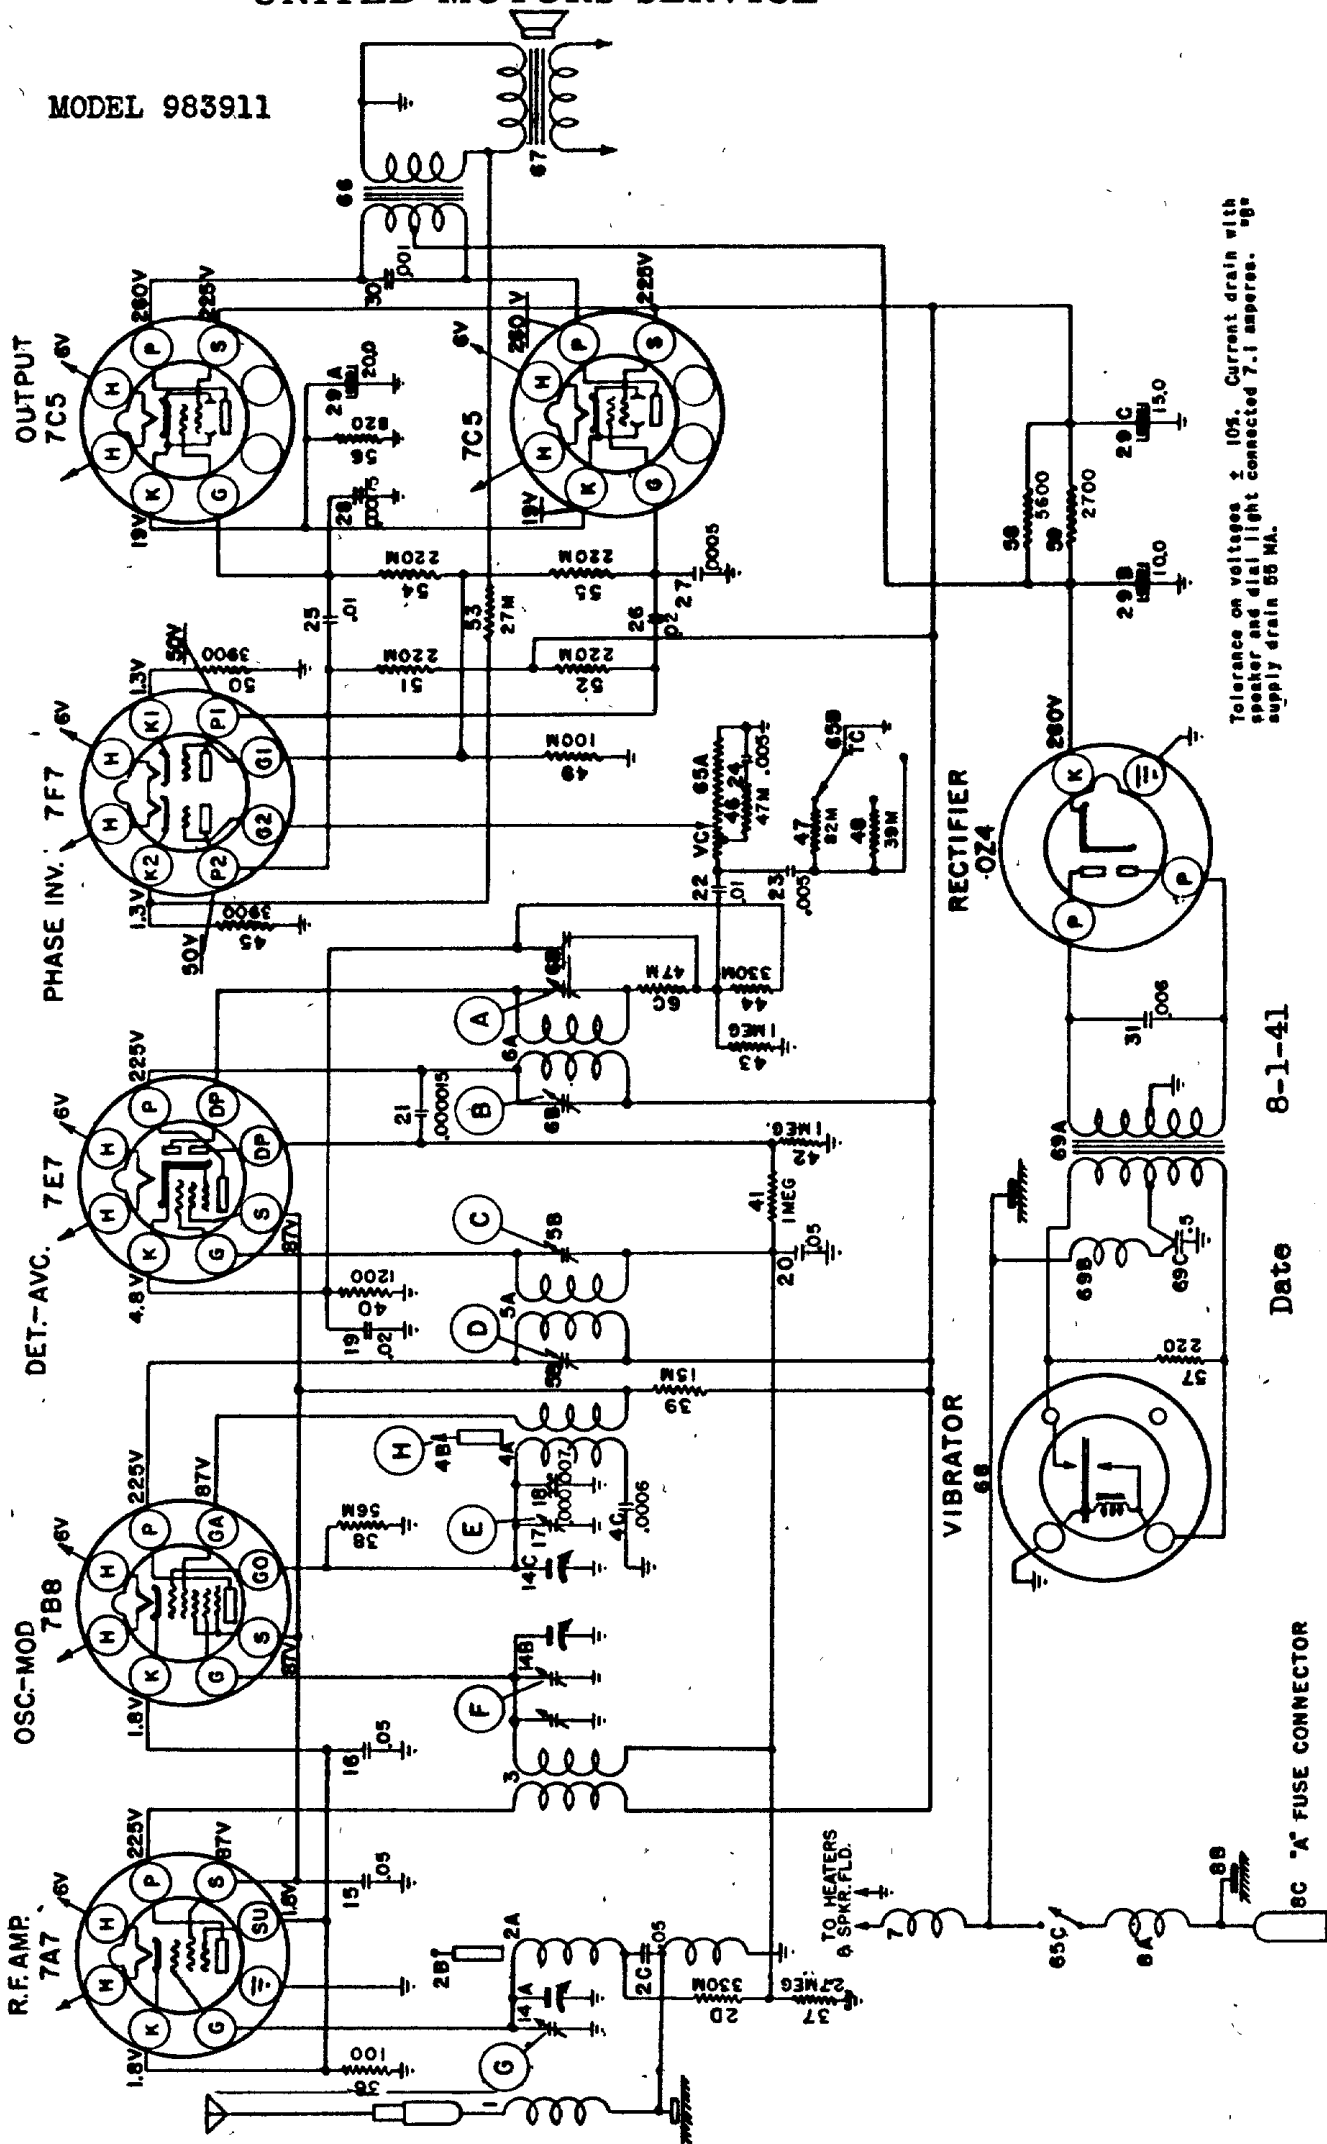

Tolerance on voltages $\pm 10\%$. Current drain with
 speaker and dial light connected 7.1 amperes. $\pm 10\%$
 supply drain 66 MA.

8-1-41

Date

8C "A" FUSE CONNECTOR