
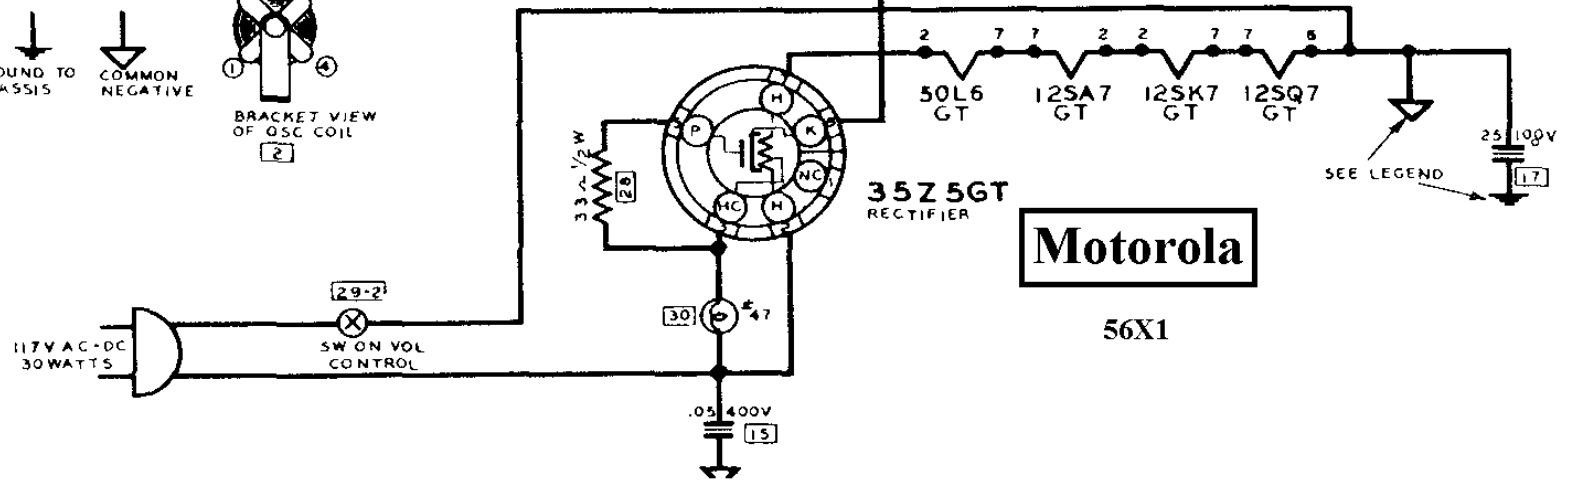



I.F. = 455 K.C.
FREQ. RANGE
540 TO 1720 K.C.

Diagram No.	Part No.	Description
1	1220937	Back & Loop Assembly
2	21A20509	Osc. Coil (Ceramic) Grn-Blk. Dot.
3	1121893	I.F. Coil & Shield Assembly
4	1120935	Detector Coil & Shield Assembly
5	25A20503	Output Transformer
6	50L8GT	Speaker (5" Electro)
7	1220506	Gang & Pulley Assembly (2 Gang)
8	20A18740	Trimmer & "U" Bracket (On Loop Assembly)
9	23A20504	Electrolytic Cond. & Strap (20-20/150V)
10	859801	Tubular Condenser (.01-100V.)
11	859802	Tubular Condenser (.01-200V.)
12	859803	Tubular Condenser (.02-100V.)
13	859804	Tubular Condenser (.03-200V.) On Loop Assembly.
14	859805	Tubular Condenser (.05-100V.)
15	859806	Tubular Condenser (.05-100V.)
16	859807	Tubular Condenser (.1-100V.)
17	859808	Tubular Condenser (.25-100V.)
18	21B6503	Molded Mica Condenser (50 MMF) 20%
19	21B6517	Molded Mica Condenser (250 MMF) 20%
20	21B6500	Molded Mica Condenser (500 MMF) 20%
21	686179	Carbon Resistor (3.3 Meg-1/3-20) 1/2 W.
22	686071	Carbon Resistor (1.0 Meg-1/3-20) 1/2 W.
23	686011	Carbon Resistor (1,70,000-1/3-20) 1/2 W.
24	686003	Carbon Resistor (220,000-1/3-20) 1/2 W.
25	686050	Carbon Resistor (22,000-1/3-20) 1/2 W.
26	686197	Carbon Resistor (270-1/3-10) 1/2 W.
27	686293	Carbon Resistor (150-1/3-20) 1/2 W.
28	686057	Carbon Resistor (33-1/2-20) 1/2 W.
29	18A11649	Volume Control & Switch (.5 Meg)
30	65K11054	Bulb (Brown Base) #17
31	23A22953	Electrolytic Condenser (20 MFD-25V.)



Motorola

56X1