
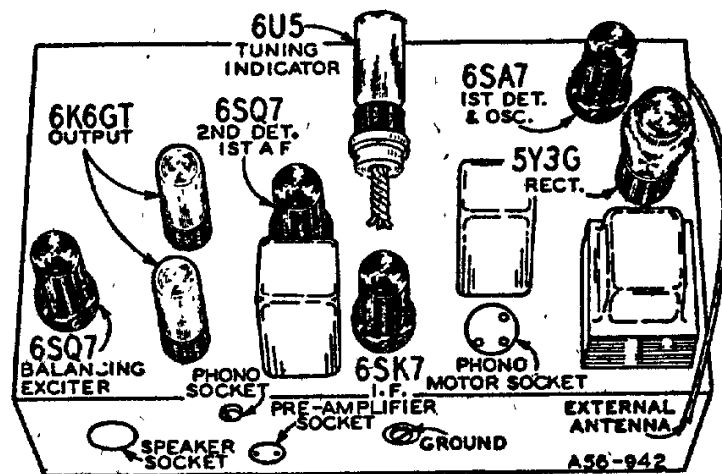
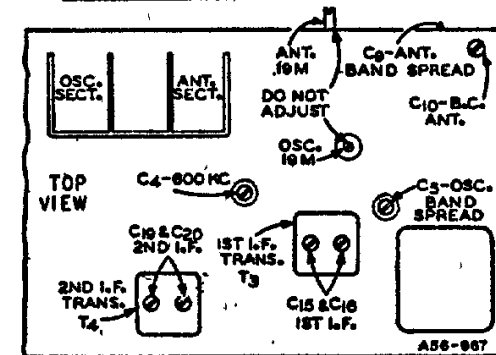
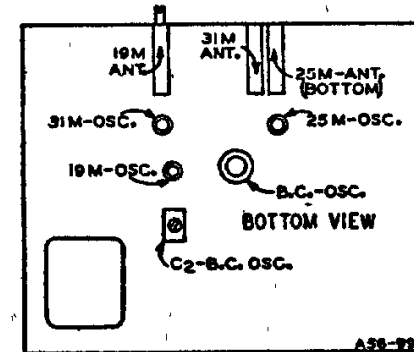


MODEL 14BR-911A

MODELS 14WG-808M, 14WG-808W

MONTGOMERY-WARD & CO.

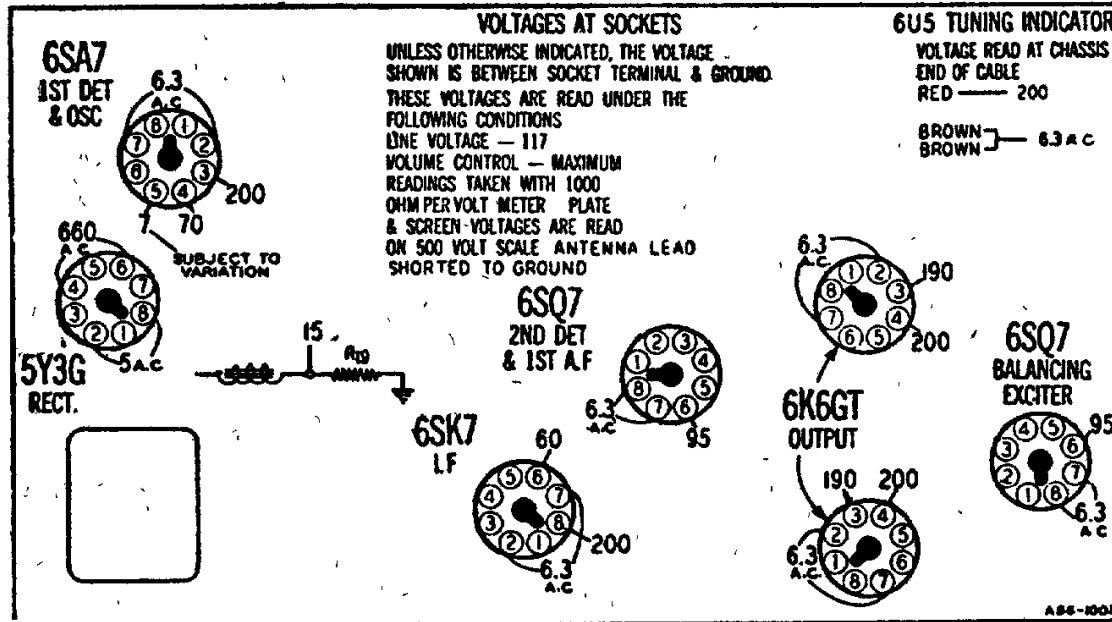

ALIGNMENT FOR MODELS 14WG-808M, 14WG-808W IS THE SAME AS THAT FOR MODEL 14WG-807

SPECIFICATIONS

Power
Consumption - 57 Watts (at 117 volts 60 cycles)
77 Watts (Phonograph Operating)
Power Output - 3.0 Watts Undistorted
4.5 Watts Maximum
Selectivity - 38 KC Broad at 1000 times Signal
Intermediate Frequency - 456 KC
Speaker - 10" Electro-Dynamic

Tuning Frequency Range
Band
B Range... 535 to 1610 KC... 15 Microvolts Aver.
19 Meter... 14.6 to 15.8 MC... 26 Microvolts Aver.
25 Meter... 11.1 to 12.0 MC... 25 Microvolts Aver.
31 Meter... 9.3 to 10.05 MC... 22 Microvolts Aver.

Sensitivity External Antenna (For 0.5 Watt Output)