

RESISTORS

R1	BE13064	3500 ohm— $\frac{1}{2}$ w.
R2	BE130276	10 ohm— $\frac{1}{2}$ w.
R3	BE1304	3 megohm— $\frac{1}{2}$ w.
R4	BE130236	30M ohm— $\frac{1}{2}$ w.
R5	BE130307	15M ohm—1 w.
R6	BE13083	300 ohm— $\frac{1}{2}$ w.
R7	BE13012	50M ohm— $\frac{1}{2}$ w.
R8	BE13038	2 megohm— $\frac{1}{2}$ w.
R9	BE13011	250M ohm— $\frac{1}{2}$ w.
R10	BE130149	15M ohm— $\frac{1}{2}$ w.
R11	BE101223	Tone Control—1 megohm
R12	BE101224	Volume control— $\frac{1}{2}$ megohm
R13	BE130257	5 megohm— $\frac{1}{2}$ w.
R14	BE1303	500M ohm— $\frac{1}{2}$ w.
R15	BE130218	5M ohm— $\frac{1}{2}$ w.
R16	BE130103	100M ohm— $\frac{1}{2}$ w.
R17	BE130103	100M ohm— $\frac{1}{2}$ w.
R18	BE1303	500M ohm— $\frac{1}{2}$ w.
R19	BE1303	500M ohm— $\frac{1}{2}$ w.
R20	BE130320	320 ohm—1 w.

CONDENSERS

C	BE102133	2 gang variable condenser
C1	BE124116	Short wave antenna trimmer
C2	BE124141	B.C. Antenna Trimmer
C3	BE1292	.0005 mica
C4	BE124142	Dual Adj. Trimmer—S.W. Osc. Trimmer
C5	BE124142	Dual Adj. Trim.—B.C. Osc. Trimmer
C6	BE124140	Dual Adj. Cond.—B.C. Pad
C7	BE124140	Dual Adj. Cond.—S.W. Pad
C8	BE12960	.00015 mica
C9	BE10013	.05 x 400 v.
C10	BE1009	.05 x 200 v.
C11	BE1009	.05 x 200 v.
C12	BE1001	.1 x 400 v.
C13	BE129161	Dual—.0001 Mica
C14	BE129161	Dual—.0001 Mica
C15	BE119108	16 mfd. x 450 w.v. lytic cond.
C16	BE119108	16 mfd. x 450 w.v. lytic cond.
C17	BE1295	.0001 mica
C18	BE100120	.035 x 200 v.
C19	BE10019	.006 x 600 v.
C20	BE10026	.02 x 400 v.
C21	BE10019	.006 x 600 v.
C22	BE10013	.05 x 400 v.
C23	BE10013	.05 x 400 v.
C24	BE10061	.02 x 600 v.
C25	BE10061	.02 x 600 v.
C26	BE10019	.006 x 600 v.

C4 and C5, C6 and C7, and C13 and C14 are in same unit.


BOTTOM VIEW OF CHASSIS

VOLTAGES MEASURED WITH 1000 OHM PER VOLT VOLTMETER BETWEEN SOCKET TERMINALS AND CHASSIS. LOOP CONNECTED, RECEIVER OFF CARRIER.


SPEAKER SOCKET



- [A] CANNOT BE MEASURED WITH VOLTMETER.
- [B] ON 250 VOLT SCALE
- [C] 4.0 VOLTS BETWEEN #6 PIN ON 6K6G & #8 PIN ON 6J5G (#8 PINS +)
- [D] 5.0 VOLTS A.C. BETWEEN PINS #2 & #8

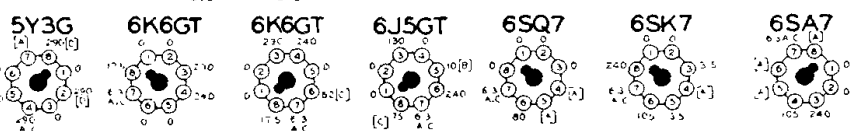


REAR OF CHASSIS

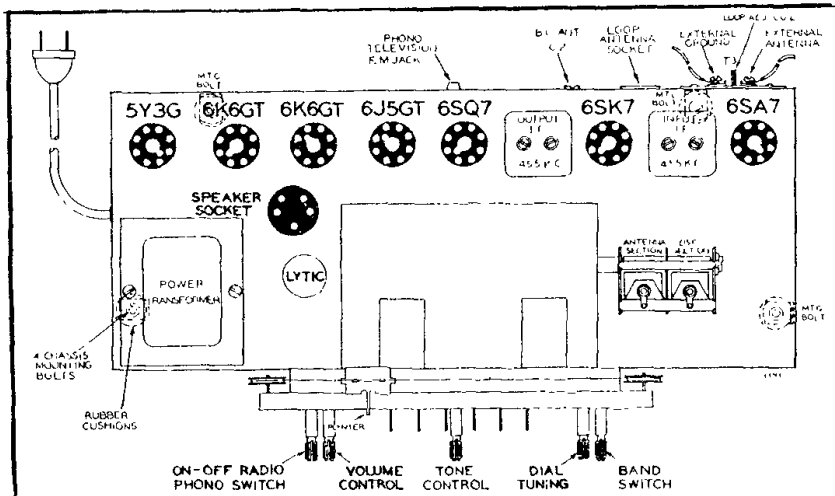

MONTGOMERY WARD

MODEL 04BR-729A

MODEL 04BR-730A

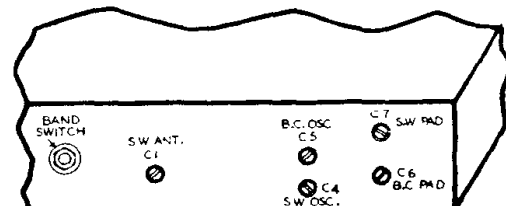

TRIMMER VIEW FRONT CHASSIS FLANGE