


# MOTOROLA

MODEL  
SH21



CHASSIS  
HS-829 AUDIO AMP  
HS-830 PWR SUPPLY

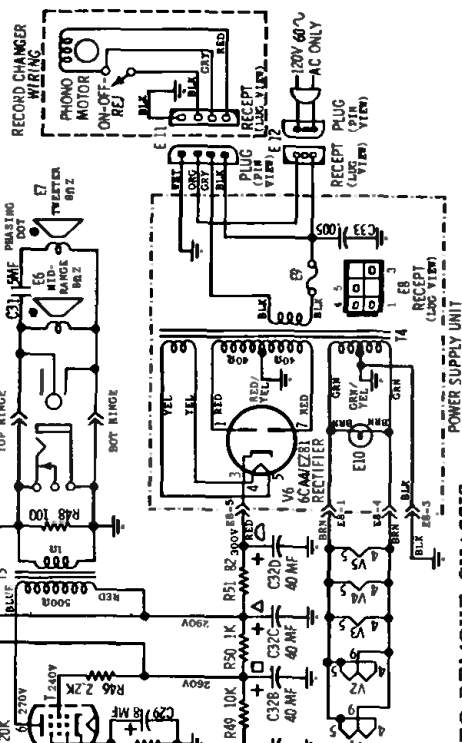

## TO REMOVE CHASSIS

1. Remove perforated baffleboard - 3 screws hold it in place.
2. Remove cabinet base - 4 screws hold it in place.
3. Remove 5 control knobs, 2 escutcheon mounting nuts, escutcheon; then remove two control strip mounting screws.
4. Disconnect control strip cables from amplifier chassis & record changer; remove control strip.
5. Unsolder all speaker and power hinge connecting leads from amplifier chassis (code all leads). Disconnect cable between amplifier and power supply. Disconnect AC cord from power supply chassis, then remove on-off indicator light - 1 screw holds it in place.
6. Remove 2 amplifier mounting nuts & 4 power supply mounting nuts.
7. Remove chassis from cabinet.

NOTE: Before replacing chassis into cabinet, remember: (1) to restaple the interconnecting cables to their original locations, and (2) to push the perforated baffleboard into its mounting slot in the record changer mounting board as it is being installed.

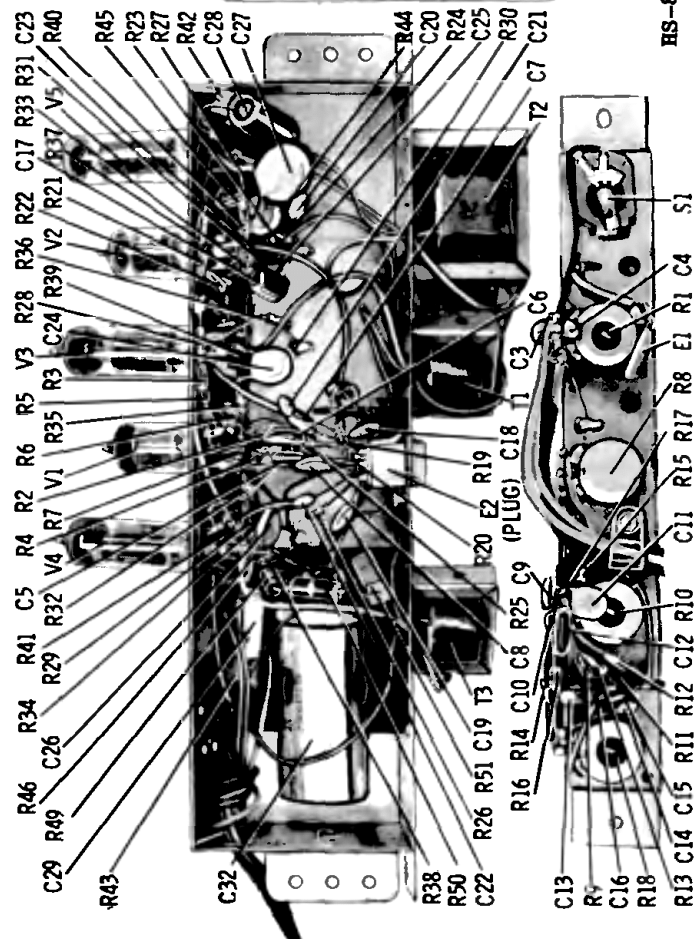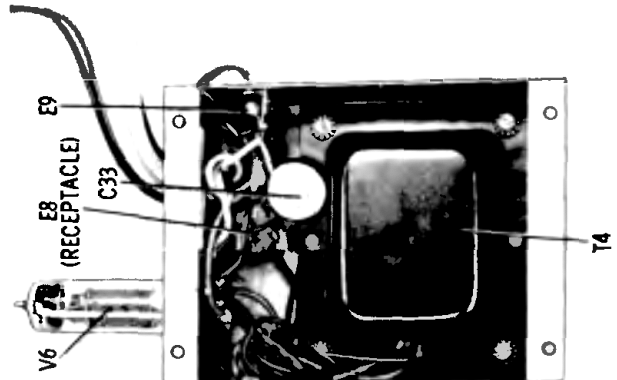

NOTES:  
CAPACITORS - Unless otherwise specified, decimal values in MF, all others in MMF.  
VOLTAGES - Measured from point indicated to chassis with a VTVM,  $\pm 10\%$  No signal input.