


TUNG-SOL**DOUBLE DIODE**
MINIATURE TYPE**GLASS BULB**


COATED UNIPOTENTIAL CATHODE

HEATER

SERIES
12.6 VOLTS
0.45 AMP.**PARALLEL**
6.3 VOLTS
0.9 AMP.

AC OR DC

ANY MOUNTING POSITION

**BOTTOM VIEW**
MINIATURE BUTTON
9 PIN BASE
985

THE 12DF5 IS A DOUBLE DIODE FULL WAVE RECTIFIER IN THE 9-PIN MINIATURE CONSTRUCTION. IT HAS A CENTER-TAPPED HEATER, SEPARATE CATHODE CONNECTIONS, AND RELATIVELY HIGH OUTPUT CURRENT CAPABILITIES.

RATINGS

RECTIFIER SERVICE

HEATER VOLTAGE	12.6	6.3	VOLTS
MAXIMUM PEAK INVERSE PLATE VOLTAGE	1275		VOLTS
MAXIMUM AC PLATE SUPPLY VOLTAGE, (EACH PLATE RMS.) (SEE RATING CHART #1)	450		VOLTS
MAXIMUM DC OUTPUT CURRENT	SEE RATING CHART #1		
MAXIMUM STEADY STATE PEAK PLATE CURRENT (EACH PLATE) (SEE RATING CHART #2)	350		MA.
MAXIMUM TRANSIENT PEAK PLATE CURRENT (EACH PLATE) (SEE RATING CHART #3)	2.0		AMP.
MAXIMUM AC HEATER CATHODE VOLTAGE (RMS)	225		VOLTS
MAXIMUM DC HEATER-CATHODE VOLTAGE HEATER NEGATIVE WITH RESPECT TO CATHODE	450		VOLTS

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

AVERAGE CHARACTERISTICS


HEATER VOLTAGE	12.6	6.3	VOLTS
HEATER CURRENT	0.45	0.9	AMP.
TUBE VOLTAGE DROP			
TUBE CONDUCTING: 100 MA. EACH PLATE	40		VOLTS

TYPICAL OPERATION - FULL WAVE RECTIFIER

	INPUT TO FILTER		
	CAPACITOR	CHOKE	
HEATER VOLTAGE	12.6	6.3	VOLTS
HEATER CURRENT	0.45	0.9	AMP.
AC PLATE SUPPLY VOLTAGE (EACH PLATE) (RMS) ^A	325	450	VOLTS
FILTER INPUT CONDENSER	40	---	μf
FILTER INPUT CHOKE	---	10	HENRYS
EFFECTIVE PLATE SUPPLY RESISTANCE (EA-PLATE)	82	---	OHMS
DC OUTPUT CURRENT AT FILTER	100	100	MA.
DC OUTPUT VOLTAGE AT FILTER	330	360	VOLTS

^A AC PLATE VOLTAGE IS MEASURED WITHOUT LOAD.

12DF5
RATING CHART #1

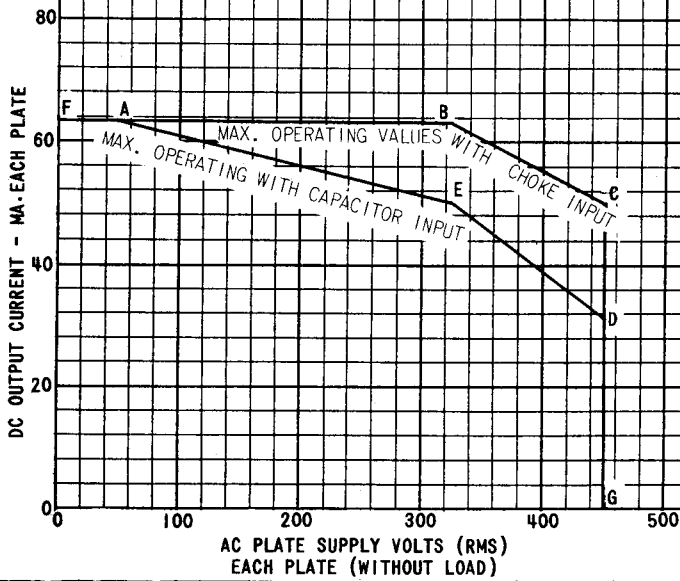

12DF5
RATING CHART II

