




UNITED MOTORS

Packard  
Clipper


472046

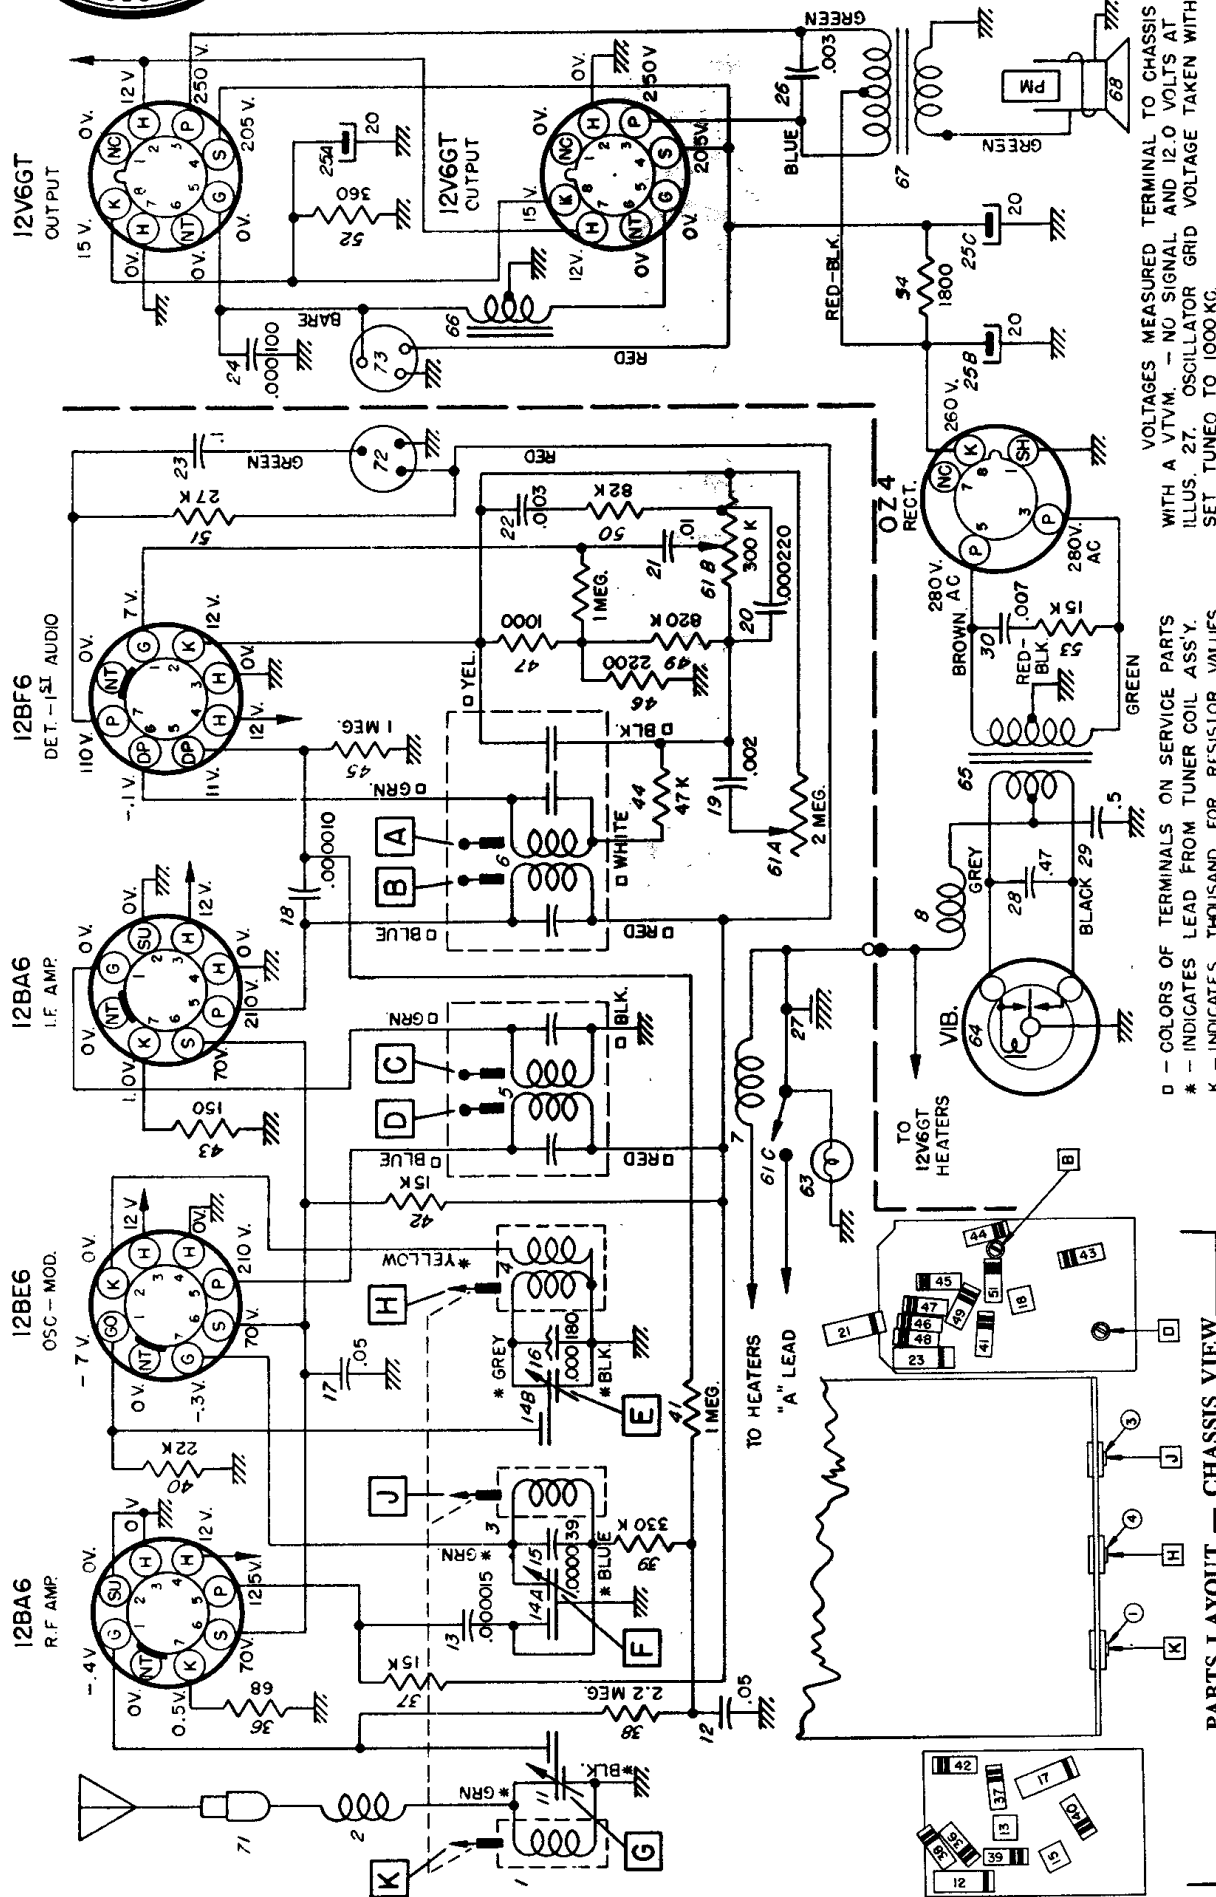

VOLTAGES MEASURED TERMINAL TO CHASSIS WITH A VTVM. - NO SIGNAL AND 12.0 VOLTS AT ILLUS. 27. OSCILLATOR GRID VOLTAGE TAKEN WITH K - INDICATES THOUSAND FOR RESISTOR VALUES.

Steps	Series Capacitor or Dummy Antenna	Connect Signal Generator to	Signal Generator Frequency	Tune Receiver to	Adjust in Sequence For Max. Output
1	0.1 Mfd.	12BE6 Grid (Pin #7)	262 KC	High Frequency Stop	A, B, C, E
2	0.000082 Mfd.	Antenna Connector	1615 KC	High Frequency Stop	E, F, G
3	0.000082 Mfd.	Antenna Connector	1000 KC	Signal Generator Signal	J, K
4	0.000082 Mfd.	Antenna Connector	1615 KC	High Frequency Stop	F, G

PARTS LAYOUT - CHASSIS VIEW

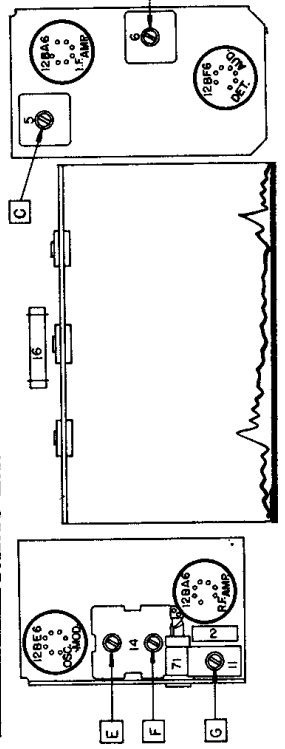

PARTS LAYOUT - TUBE VIEW