


OZARKA, INC.

MODEL Viking 92 A  
Schematic, Chassis  
Voltage

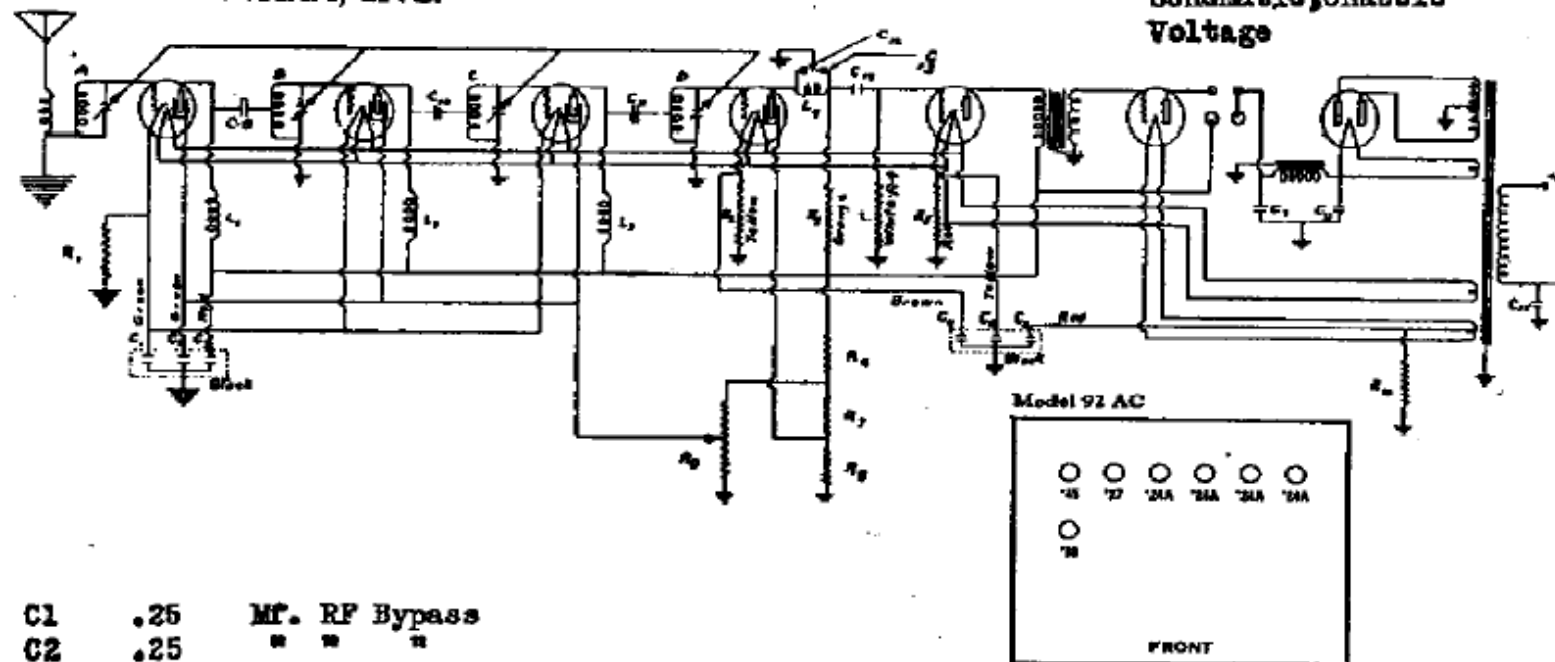

C1	.25	Mf. RF Bypass
C2	.25	" " "
C3	1.0	" " "
C4	.25	" AF "
C5	.1	" " "
C6	.5	" " "
C7	8.0	" " "
C8	8.0	" " "
C9	.0001	" " "
C10	.0001	" " "
C11	.0001	" " "
C12	.001	" " "
C13	.001	" " "
C14	.005	" " "
C15	.005	" " "

R1	225 Ohms
R2	40,000 "
R3	350,000 "
R4	1,000,000 "
R5	2,000 "
R6	5,000 "
R7	5,000 "
R8	5,000 "
R9	10,000 "
R10	1,600 "

Tube	Type	Plate	S. Grid	Cath.
R.F.	'24	150	70	2
R.F.	'24	150	70	2
R.F.	'24	150	70	2.5
Det.	'24	50	35	8
A.F.	'27	140	--	50(Grid)
Pwr.	'45	270	--	
Rect.	'80			

Volume MAX.

Voltages to ground.

