


PHILCO RADIO & TELEVISION CORP. MODEL S-1826


Studebaker "Custom"

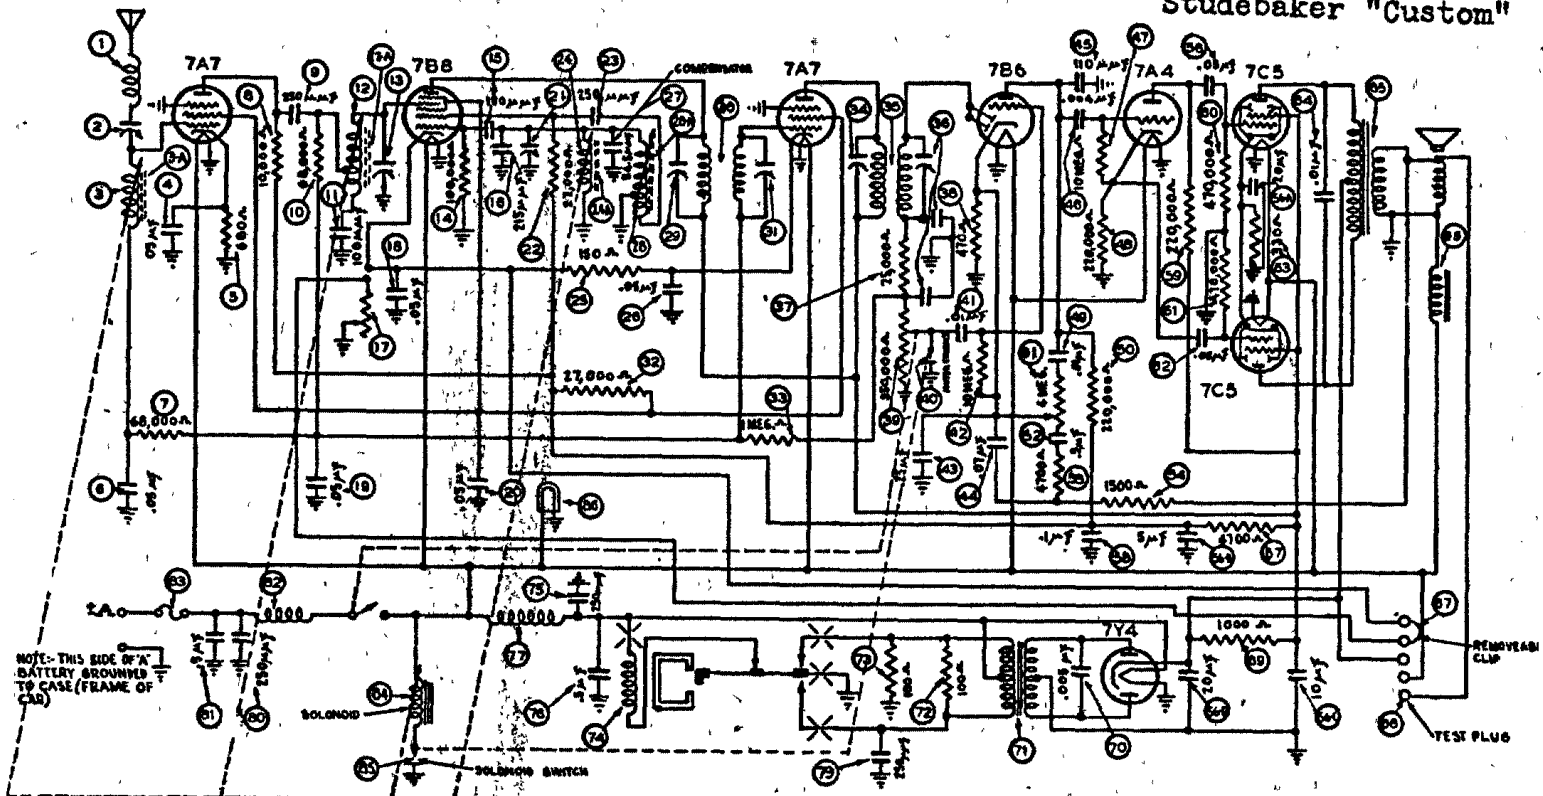

FOR ALIGNMENT SEE INDEX

PARTS LIST — S-1826

No.	Description	Part No.	Description	Part No.
1	Antenna Choke	65-0378	Resistor (220,000 ohms)	33-422334
2	Antenna Padder	63-0053	Tune Control	
3	Antenna Transformer	85-0349	(4,000,000 ohms)	67-0038
4	Iron Core	57-1541	Condenser (.5 Mfd.)	61-0134
5	Condenser (.05 Mfd.)	61-0111	Resistor (4,700 ohms)	33-247154
6	Resistor (68,000 ohms)	33-168334	Resistor (1,500 ohms)	33-215154
7	Condenser (.05 Mfd.)	61-0111	Condenser (.1 Mfd.)	61-0113
8	Resistor (68,000 ohms)	33-368154	Filter Condenser	
9	Resistor (10,000 ohms)	33-310334	(5-10-20-20 Mfd.)	61-0150
10	Condenser (250 Mmfd.)	60-125157	Resistor (4,700 ohms)	33-247434
11	Resistor (68,000 ohms)	33-368154	Condenser (.05 Mfd.)	61-0122
12	Condenser (100 Mmfd.)	60-110157	Resistor (220,000 ohms)	33-422334
13	R. F. Transformer	65-0359	Resistor (470,000 ohms)	33-447154
14	Iron Core	57-1541	Resistor (470,000 ohms)	33-447154
15	Padder	63-0052	Condenser (.05 Mfd.)	61-0101
16	Resistor (100,000 ohms)	33-410154	Resistor (330 ohms)	33-183436
17	Condenser (110 Mmfd.)	60-110157	Condenser (.01 Mfd.)	61-0124
18	Condenser (215 Mmfd.)	61-0148	Output Transformer	65-0409
19	Sensitivity Control	67-0036	Field Coil	Not Replaceable
20	Condenser (.05 Mfd.)	61-0111	Cone & Voice Coil	
21	Condenser (.05 Mfd.)	61-0111	(For 73-0052-2 Speaker)	91-0164
22	Condenser (.05 Mfd.)	61-0101	(For 73-0052-3 Speaker)	91-0165
23	Padder	63-0055	Jumper	57-1121
24	Resistor (22,000 ohms)	33-322334	Test Socket	55-1078
25	Condenser (250 Mmfd.)	60-125157	Resistor (1,000 ohms)	33-210434
26	Oscillator Transformer	65-0350	Condenser (5,000 Mmfd.)	61-0153
27	Iron Core	57-1542	Power Transformer	65-0358
28	Resistor (150 ohms)	33-115336	Resistor (100 ohms)	33-110434
29	Condenser (.05 Mfd.)	61-0111	Resistor (100 ohms)	33-110434
30	Condenser (54.5 Mmfd.)	61-0148	Vibrator	83-0027
31	Oscillator Tracking Trans.	65-0351	Condenser (250 Mmfd.)	60-125157
32	Oscillator Tracking Core	57-1659	Condenser (.5 Mfd.)	61-0137
33	Padder (Pri. 1st I. F. Trans.)		Vibrator Choke	65-0151
34	First I. F. Transformer	65-0352	Condenser (250 Mmfd.)	60-125157
35	Padder (Sec. 1st I. F. Trans.)		Condenser (250 Mmfd.)	60-125157
36	Resistor (27,000 ohms)	33-327434	Condenser (.5 Mfd.)	61-0137
37	Resistor (1,000,000 ohms)	33-510154	"A" Choke	32-1644
38	Padder (Pri. 2nd I. F. Trans.)		Fuse	45-2559
39	Second I. F. Transformer	65-0410	Solenoid	65-0380
40	Padder (Sec. 2nd I. F. Trans.)		Solenoid Switch	Part of 85-0125
41	Resistor (25,000 ohms)	33-325154	Pilot Lamp	34-2064
42	Resistor (470 ohms)	33-147336	Tuning & Volume Knob	77-0633
43	Volume Control (350,000 ohms)		Hook Bolt (Radio Mtg.)	87-0135FA3
44	& On-Off Switch	67-0037	Wing Nut (Radio Mtg.)	97-0048FA3
45	Muter Switch	85-0125	Gland Nut Wrench	28-5038FA3
46	Condenser (.01 Mfd.)	61-0100	Condenser (Generator)	30-4007
47	Resistor		Condenser (Distributor)	60-125157
48	(10,000,000 ohms)	33-610154	Distributor Suppressor	32-2250
49	Condenser (.25 Mfd.)	61-0151	Ground Strap	77-0336
50	Condenser (.07 Mfd.)	61-0152	Fuel Gauge Resistor	67-0041
51	Condenser (110 Mmfd.)	60-110157	Front Bezel	57-1549FA8
52	Condenser (4,000 Mmfd.)	61-0129	Speed Nut (Bezel Mtg.)	97-0136FE7
53	Resistor		Color Disc Assembly	77-0648
54	(10,000,000 ohms)	33-610154	Tuning Switch	77-0600
55	Resistor (220,000 ohms)	33-422334	Dial	55-1012
56	Condenser (.01 Mfd.)	61-0100	Push Button Knob	77-0612

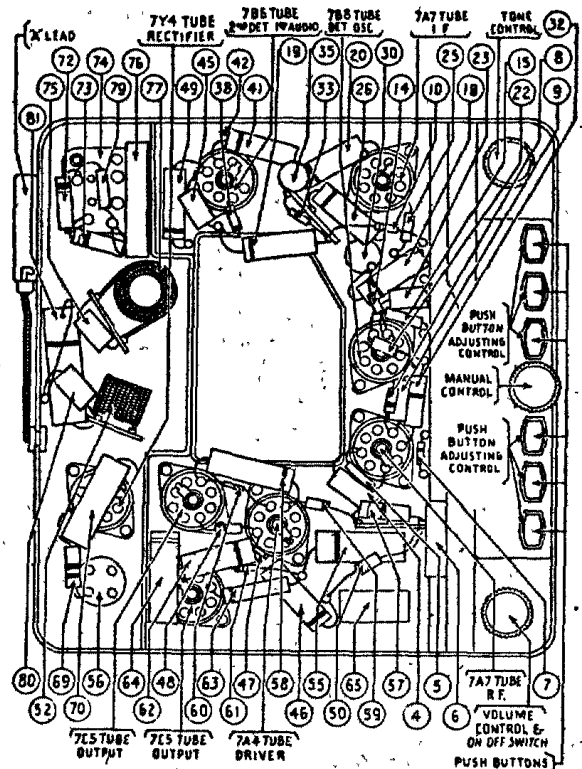

Description	Part No.
Speaker Gasket	55-1045
Speaker Cable	95-0181
Speaker Unit	73-0052
Vibrator Socket	27-6153
Tube Socket	27-8151
Manual Knob Spacer	57-1669
Manual Knob	55-1067
Manual Knob Sleeve	57-1623
Manual Knob Spring	57-1628FA3
Manual Knob Skirt	55-1061
Gland Nut	28-6558FA8
R. F. Coil Spring	57-1538
Core Draw Bar Spring	57-1649
Latch Bar Spring	57-1650
Push Button Spring	57-1651
Muter Spring	57-1652

No.	Description	Part No.
57	Pointer Spring	57-1653
58	Pointer & Cam Assembly	77-0647
59	Screws (Bezel Mtg.)	97-0111FA26
60	Screw (Cover Mtg.)	W2212FA26
61	Housing & Bracket Assembly	
62	(Ludington Green)	77-0860FC54
63	Housing & Bracket Assembly	
64	(English Grey)	77-0060FC55
65	Wiring Side Cover	
66	(Ludington Green)	57-1548FC54
67	Wiring Side Cover	
68	(English Grey)	57-1548FC55
69	Tube Side Cover	
70	(Ludington Green)	57-1547FC54
71	Tube Side Cover	
72	(English Grey)	57-1547FC55