

FIGURE 9

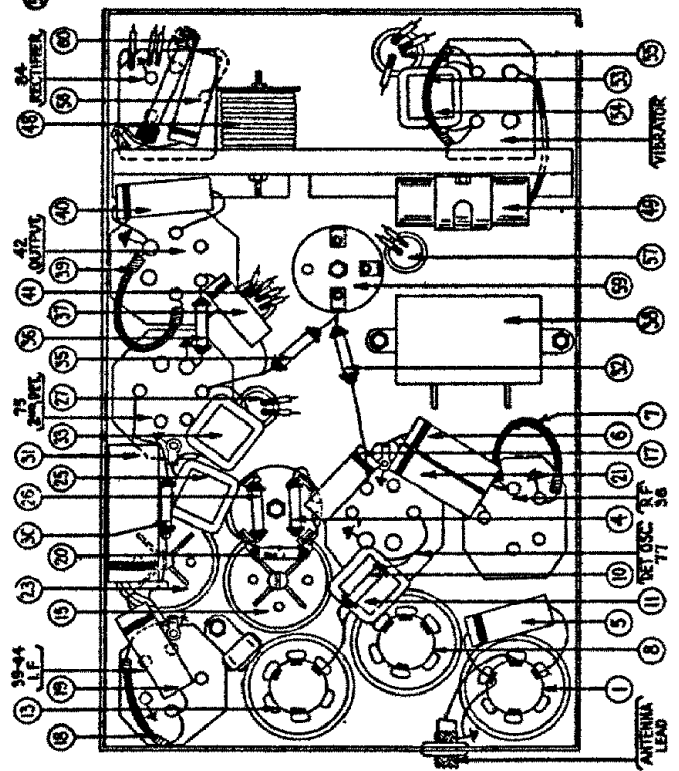


FIGURE 10

Spark Plug Resistor.....	33-1015
Distributor Resistor.....	33-1113E
Screw Type Resistor.....	4851
Interference Cond. (1/4 mfd.)	30-4007
Interference Cond. (1 mfd.)	4522
Plate Assembly.....	42-5176
Grid for Control.....	27-7325
Pointer.....	28-1991
Control Assembly.....	42-5174
Knobs.....	27-4098
Knob Spring.....	28-1788
Base Assembly.....	42-5116
Battery Cable.....	38-5704
Stud.....	28-6036
Nut.....	WES
4-prong Socket.....	27-6006
5-prong Socket.....	27-6014
6-prong Socket.....	6417
Antenna Lead.....	38-5703
Fuse.....	7927
Fuse Insulator.....	27-7131
Shafts.....	28-5234

1 Antenna Transformer.....	32-1331
2 Tuning Condenser.....	31-1164
3 1st Padder (on tun. cond.).....	33-1115
4 Resistor (70,000 ohms).....	30-4025
5 Condenser (.03 mfd.).....	30-4026
6 Resistor (.05 mfd.).....	33-3047
7 R. F. Transformer.....	32-1332
8 2nd Padder (on tun. cond.).....	33-1000
9 Resistor (10,000 ohms).....	5863
10 Condenser (.0007 mfd.).....	32-1332
11 Padder (Pri. 1st I. F. Tran.).....	32-1329
12 Oscillator Transformer.....	32-1327
13 3rd Padder (on tun. cond.).....	30-4025
14 1st I. F. Transformer.....	6443
15 Padder (Sec. 1st I. F. Tran.).....	30-4026
16 Condenser (.03 mfd.).....	33-1006
17 Resistor (700 ohms).....	30-4020
18 Condenser (.05 mfd.).....	32-1332
19 Resistor (1,000,000 ohms).....	32-1329
20 Condenser (.06 mfd.).....	30-4020
21 Padders (Prim. 2nd I. F.).....	32-1327
22 2nd I. F. Transformer.....	32-1327
23 Padder (Sec. 1st I. F. Tran.).....	32-1329
24 Cond. (.00011-.00025 mfd.).....	30-1020
25 Resistor (25,000 ohms).....	33-1018
26 Vol. Con. & Switch Assem.....	33-4058
27 Condenser (.006 mfd.).....	30-4125
28 Resistor (2,000,000 ohms).....	33-1025
29 Resistor (5000 ohms).....	6006
30 Condenser (.25 mfd.).....	30-4146
31 Resistor (51,000 ohms).....	5868
32 Condenser (.00025 mfd.).....	3082
33 Condenser (.25 mfd.).....	04390
34 Resistor (100,000 ohms).....	6099
35 Resistor (500,000 ohms).....	6097
36 Condenser (.006 mfd.).....	30-4125
37 Condenser (.10 mfd.).....	7440
38 Resistor (500 ohms).....	33-3031
39 Condenser (.006 mfd.).....	30-4024
40 Output Transformer.....	32-7214
41 Cone & Voice Coil.....	02861
42 Field Coil Assembly.....	36-3097
43 Pilot Light.....	6008
44 Resistor (7 ohms).....	33-3035
45 "A" Choke.....	32-1268
46 Choke (.5 mfd.).....	30-4047
47 Vibrator Choke.....	32-1235
48 Condenser (.5 mfd.).....	30-4147
49 Vibrator Unit.....	38-5036
50 Condenser (.05 mfd.).....	30-4039
51 Resistor (200 ohms).....	7217
52 Resistor (200 ohms).....	7217
53 Condenser (.00125 mfd.).....	5886
54 Power Transformer.....	32-7216
55 Condenser (.01 mfd.).....	30-4051
56 Condenser (4--8. mfd.).....	30-2072
57 "B" Choke.....	32-7215
58 R. F. Choke.....	32-1281
59 Resistor (30,000 ohms).....	7836
60 Resistor (32,000 ohms).....	3525