


No.	Description	Part No.
1	Aerial Choke	65-0102
2	Aerial Padder	31-6248
3	Antenna Transformer	65-0085
4	Tuning Condenser	65-0085
5	Aerial Padder (on Tun. Cond.)	65-0016
6	Condenser (.05 Mfd.)	61-0101
7	Condenser (250 Mmfd.)	31-0933
8	Resistor (85,000 ohms)	33-368184
9	Resistor (10,000 ohms)	33-310334
10	Condenser (.05 Mfd.)	61-0101
11	Resistor (330 ohms)	33-133486
12	Condenser (.05 Mfd.)	61-0111
13	Low Frequency Padder	31-6230
14	Resistor (100,000 ohms)	33-410154
15	Oscillator Transformer	65-0134
16	Condenser (25 Mmfd.)	30-1108
17	Oscillator Padder (on Tun. Cond.)	61-0083
18	Resistor (27,000 ohms)	33-327334
19	Padder (Pri. 1st I. F. Trans.)	65-0044
20	Padder (Sec. 1st I. F. Trans.)	61-0101
21	Resistor (826 ohms)	33-182438
22	Resistor (1,000,000 ohms)	33-510154
23	Second I. F. Transformer	65-0230
24	Padder (Sec. 2nd I. F. Trans.)	33-327344
25	Resistor (27,000 ohms)	33-327344
26	Resistor (330,000 ohms)	33-438154
27	Condenser (6,000 Mmfd.)	61-0103
28	Volume Control (1,000,000 ohms)	33-52988
29	On-Off Switch	33-52988
30	Condenser (.25 Mfd.)	61-0125
31	Resistor (68,000 ohms)	33-368334
32	Resistor	33-615154
33	Resistor (220,000 ohms)	33-422334
34	Condenser (.01 Mfd.)	61-0100
35	Resistor (470,000 ohms)	33-447154
36	Filter Condenser	33-447154
37	Resistor (10-15-20 Mfd.)	61-0089
38	Resistor (430 ohms)	33-143438
39	Resistor (6,200 ohms)	33-262434
40	Filament Choke	32-1844
41	Condenser (.01 Mfd.)	61-0120
42	Output Transformer	65-0048
43	Cone & Voice Coil	91-0028
44	Field Coil	Not Replaceable
45	Pilot Lamp	34-2040
46	Condenser (.5 Mfd.)	61-0106
47	Condenser (250 Mmfd.)	61-0033
48	Vibrator	33-0925
49	Resistor (230 ohms)	33-122334
50	Vibrator Choke	65-0075
51	Condenser (.5 Mfd.)	61-0137
52	Power Transformer	65-0169
53	Condenser (3,000 Mmfd.)	61-0115
54	Resistor (1,000 ohms)	33-210334
55	Padder (Pri. 1st I. F. Trans.)	65-0044
56	4 Prong Socket	27-6044
57	6 Prong Socket	27-6036
58	7 Prong Socket	27-6037
59	Volume Control	27-6131
60	Volume Control Socket	55-0945
61	Radio Housing	77-0320FC45
62	Speaker Unit	73-0029
63	Front Cover	57-1889FC45
64	"T" Bolt (Radio Mfg.)	29-6161FA1
65	Nut (Radio Mfg.)	W518FA1
66	Washer (Radio Mfg.)	26-2604FA1
67	Interference Condenser	30-4007
68	Distributor Resistor	33-1196
69	Fuse	7227
70	Standard Control Assembly	85-0117
71	Dial	55-0304
72	Flexible Shaft	57-0681

LF = 455KC



FOR OTHER DATA, SEE INDEX

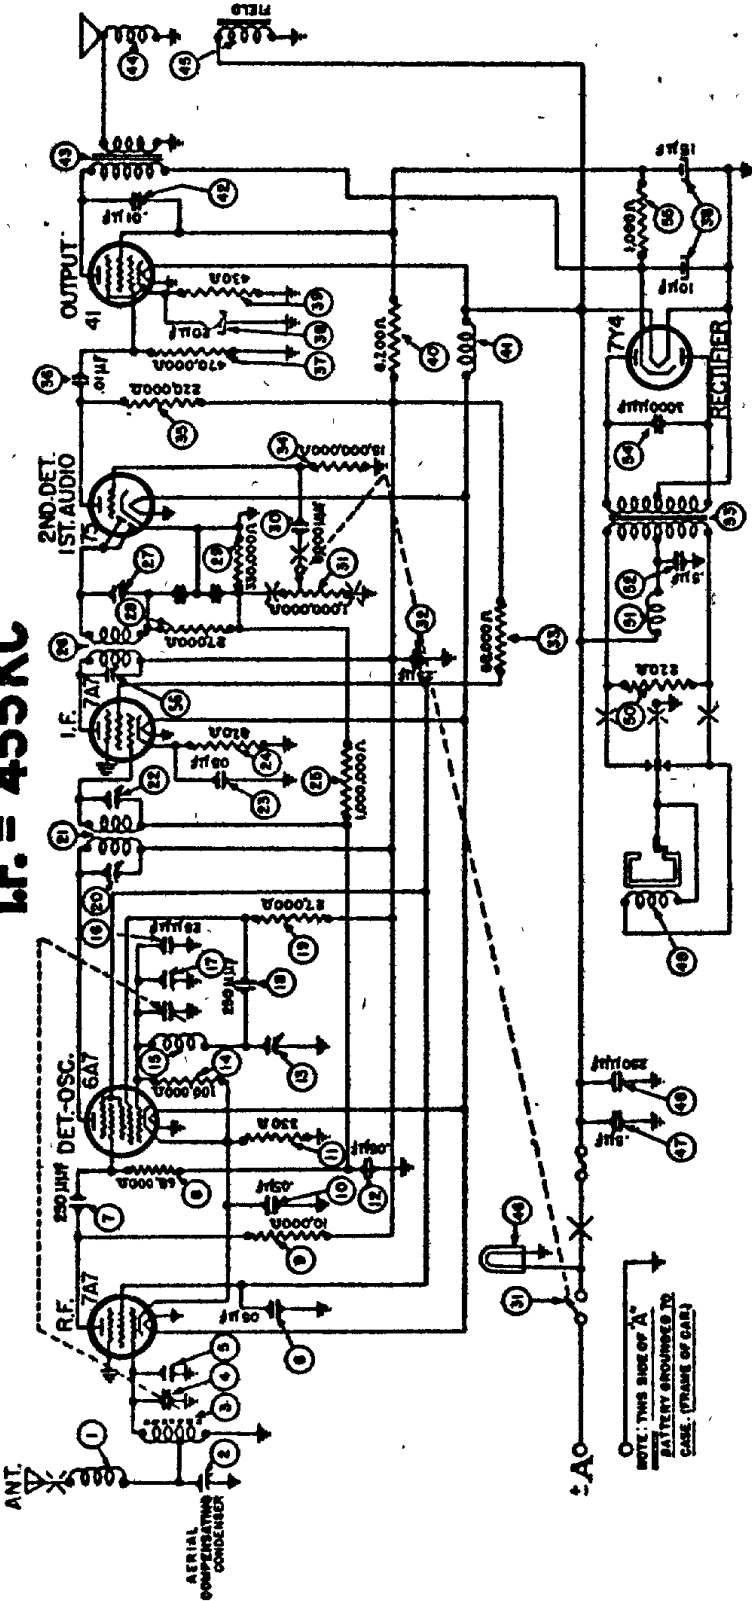