


IF DET. & OSC. 1C6
I.F. 34
2ND DET. AVC. & 1ST AF. 1B5
C-21 .05 MFD.
DRIVER 30
OUTPUT 49

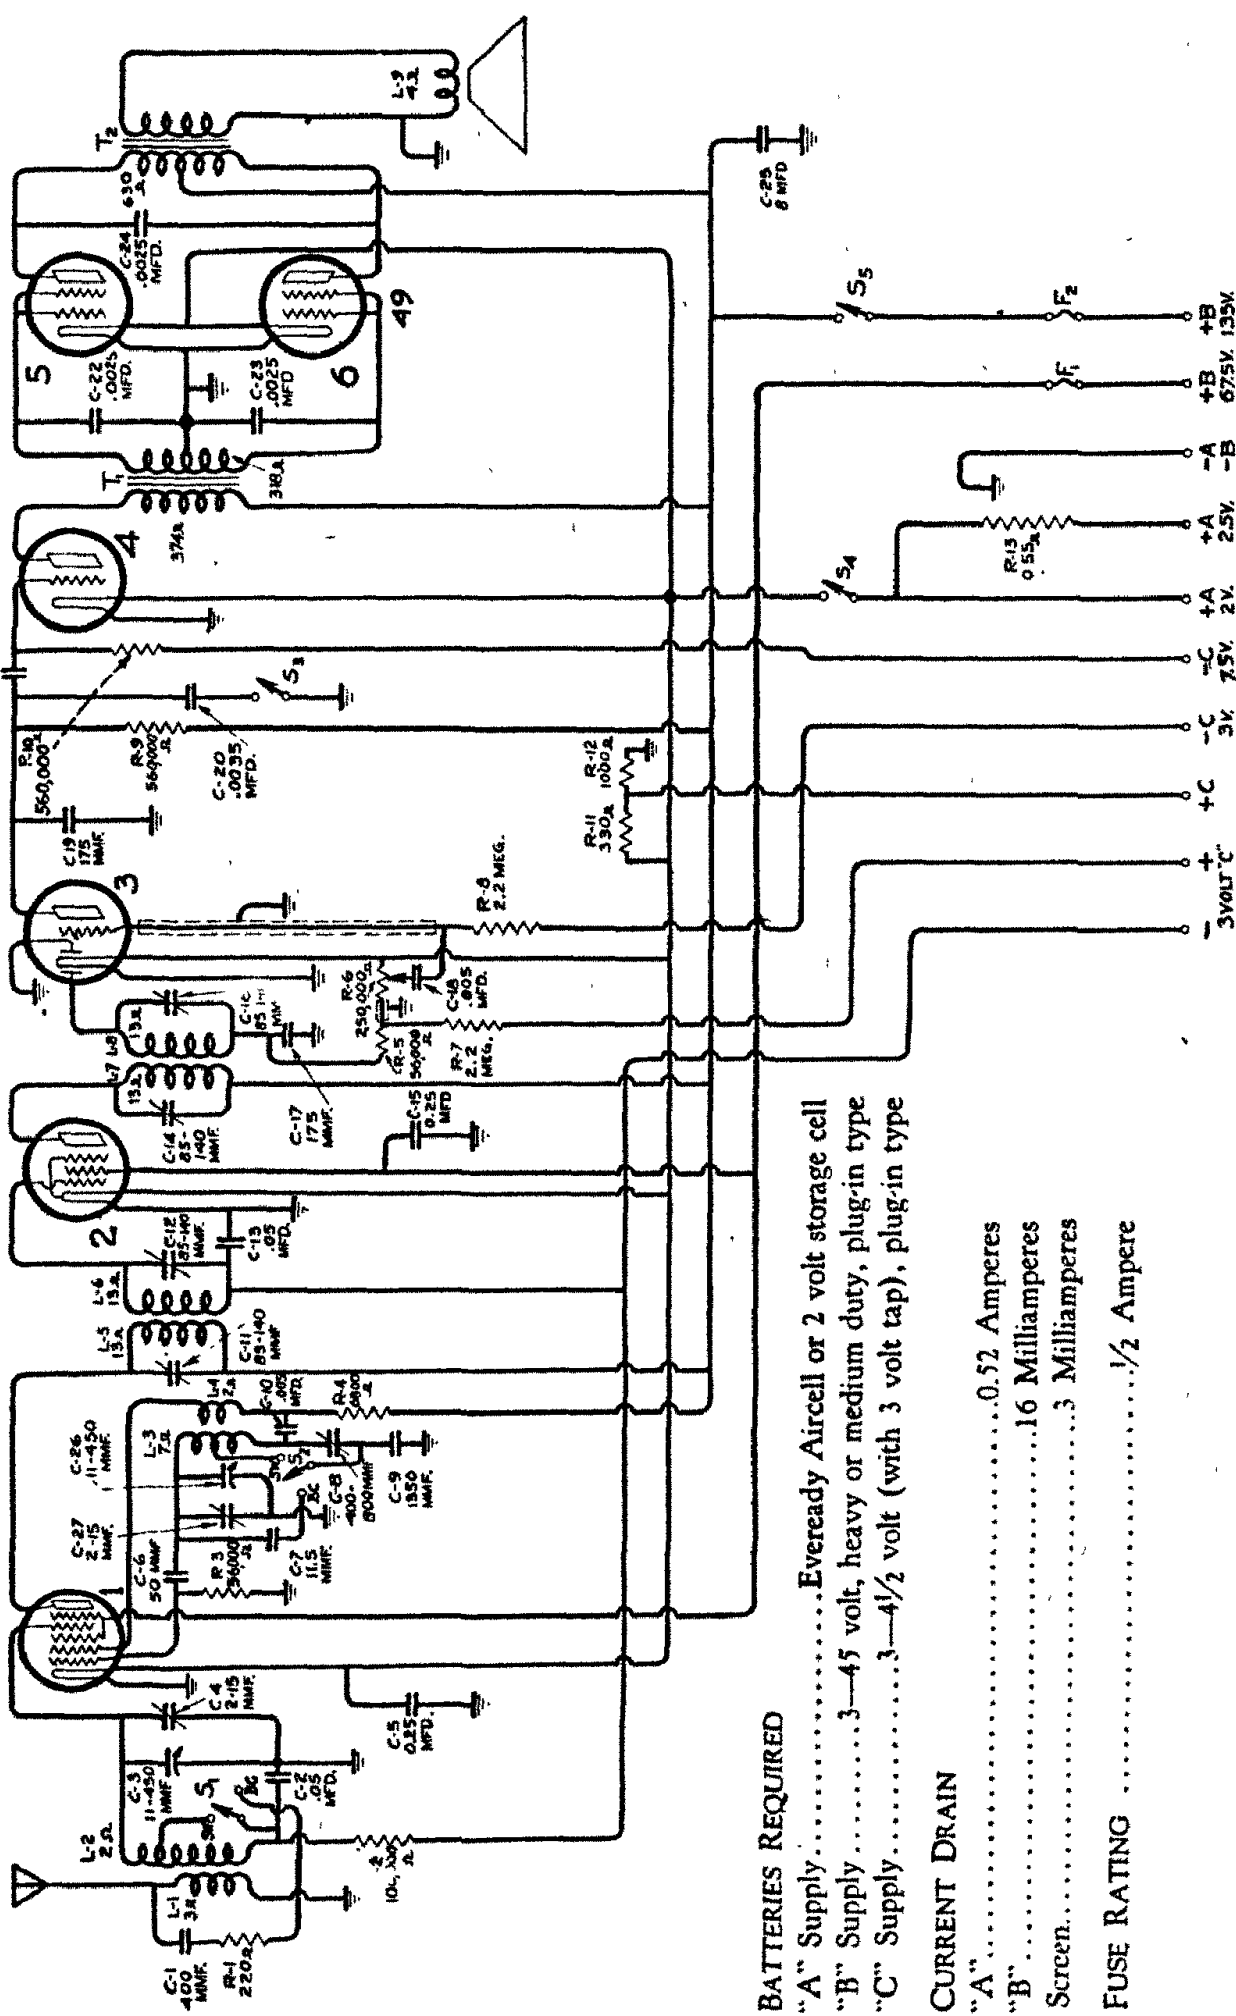

- BATTERIES REQUIRED**
- "A" Supply Eveready Aircell or 2 volt storage cell
 - "B" Supply 3—45 volt, heavy or medium duty, plug-in type
 - "C" Supply 3—4½ volt (with 3 volt tap), plug-in type
- CURRENT DRAIN**
- "A" 0.52 Amperes
 - "B" 16 Milliampers
 - Screen 3 Milliampers
- FUSE RATING** ½ Ampere

FREQUENCY RANGES	
Broadcast	540-1850 kc.
Shortwave	1850-6900 kc.
Intermediate Frequency	None required
	460 kc.
ALIGNMENT FREQUENCIES	
Broadcast	600 kc. (osc.), 1720 kc. (osc., ant.)
Shortwave	None required
Intermediate Frequency	460 kc.
POWER OUTPUT	
Undistorted	1.2 Watts
Maximum	2.2 Watts