


ISSUE A
JUNE 1939

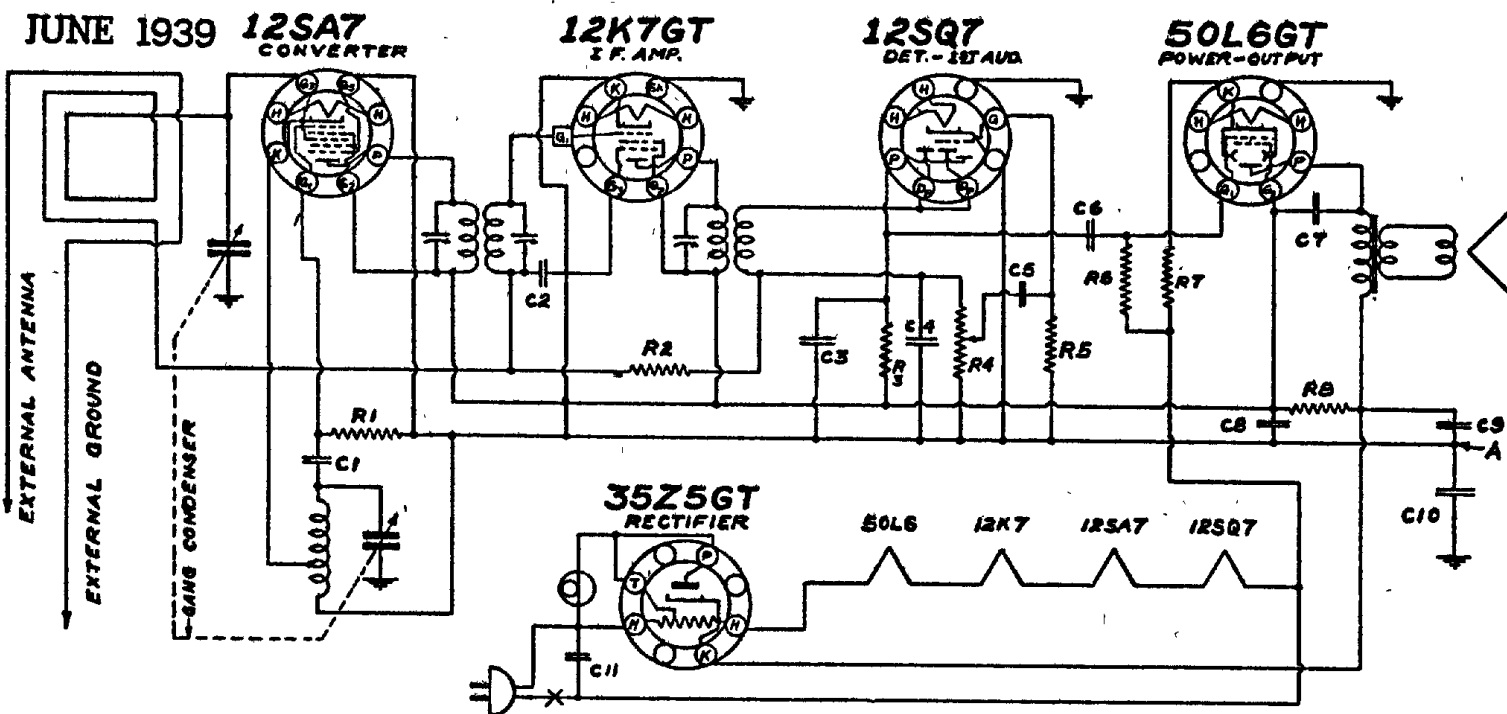

MODEL D915, Issues A and B

RESISTORS					
NO.	OHMS	WATTS	NO.	OHMS	WATTS
R1	20,000	1/2	R6	500,000	1/2
R2	2 MEG.	1/2	R7	150 ± 10%	1/2
R3	250,000	1/2	R8	1,000	1
R4	500,000	V.C.			
R5	5 MEG.	1/2			


CAPACITORS					
NO.	MFD.	VOLTS	NO.	MFD.	VOLTS
C1	.0001	MICA	C7	.01	400
C2	.02	400	C8	20.0	150
C3	.0005	MICA	C9	30.0	150
C4	.00025	MICA	C10	.25	200
C5	.01	400	C11	.05	400
C6	.002	500			

I.F. 455 K.C.

TUBES SHOW BOTTOM VIEW

C10 USED ON MODEL 5Q1 ONLY.
ON MODEL 5Q, POINT "A"
IS CONNECTED TO CHASSIS.

ISSUE C
NOV. 1939

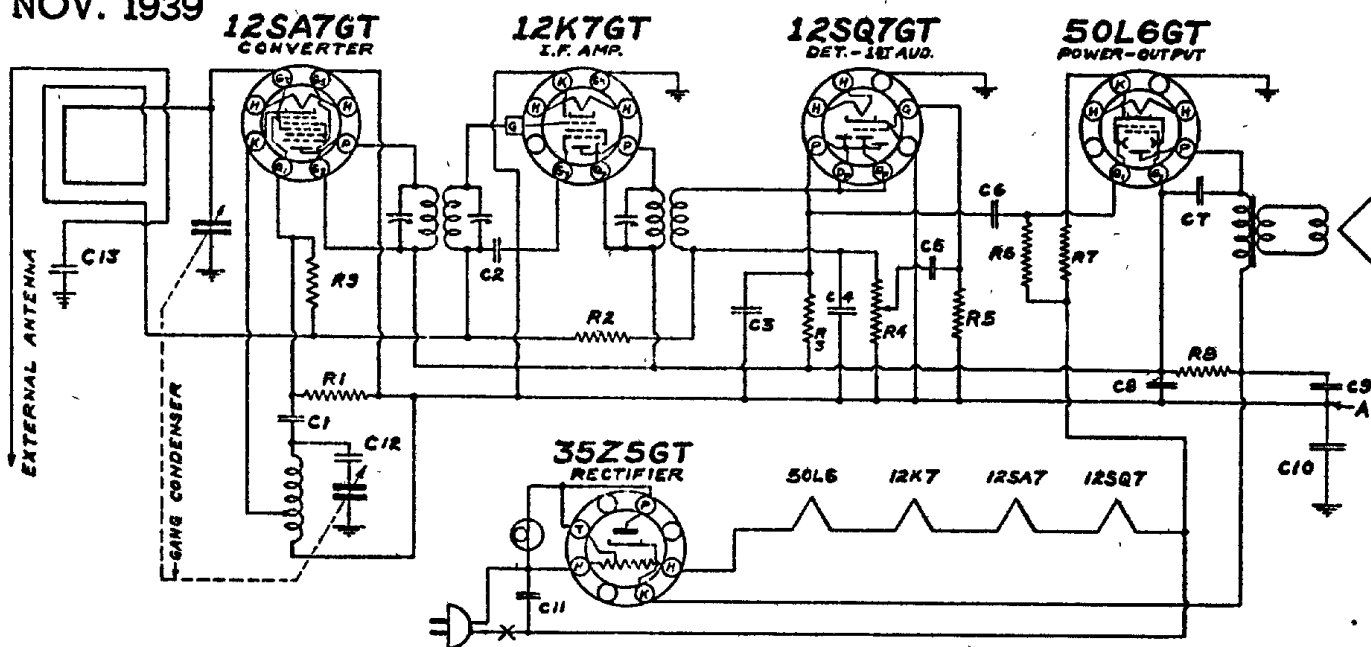

RESISTORS					
NO.	OHMS	WATTS	NO.	OHMS	WATTS
R1	20,000	1/2	R6	500,000	1/2
R2	2 MEG.	1/2	R7	150 ± 10%	1/2
R3	250,000	1/2	R8	1,000	1
R4	500,000	V.C.	R9	15 MEG.	1/2
R5	5 MEG.	1/2			

CAPACITORS					
NO.	MFD.	VOLTS	NO.	MFD.	VOLTS
C1	.0001	MICA	C7	.01	400
C2	.02	400	C8	20.0	150
C3	.0005	MICA	C9	30.0	150
C4	.00025	MICA	C10	.25	200
C5	.01	400	C11	.05	400
C6	.002	500	C12	.02	400
			C13	.001	600

I.F. 455 K.C.

TUBES SHOW BOTTOM VIEW

MODEL D915, Issue C

C10 and C12 used in model 5Q1 only. On model 5Q point "A" is connected to chassis.