


WESTINGHOUSE Chassis V-2239-6,  
Models H-677T4, H-678T4, H-679T4

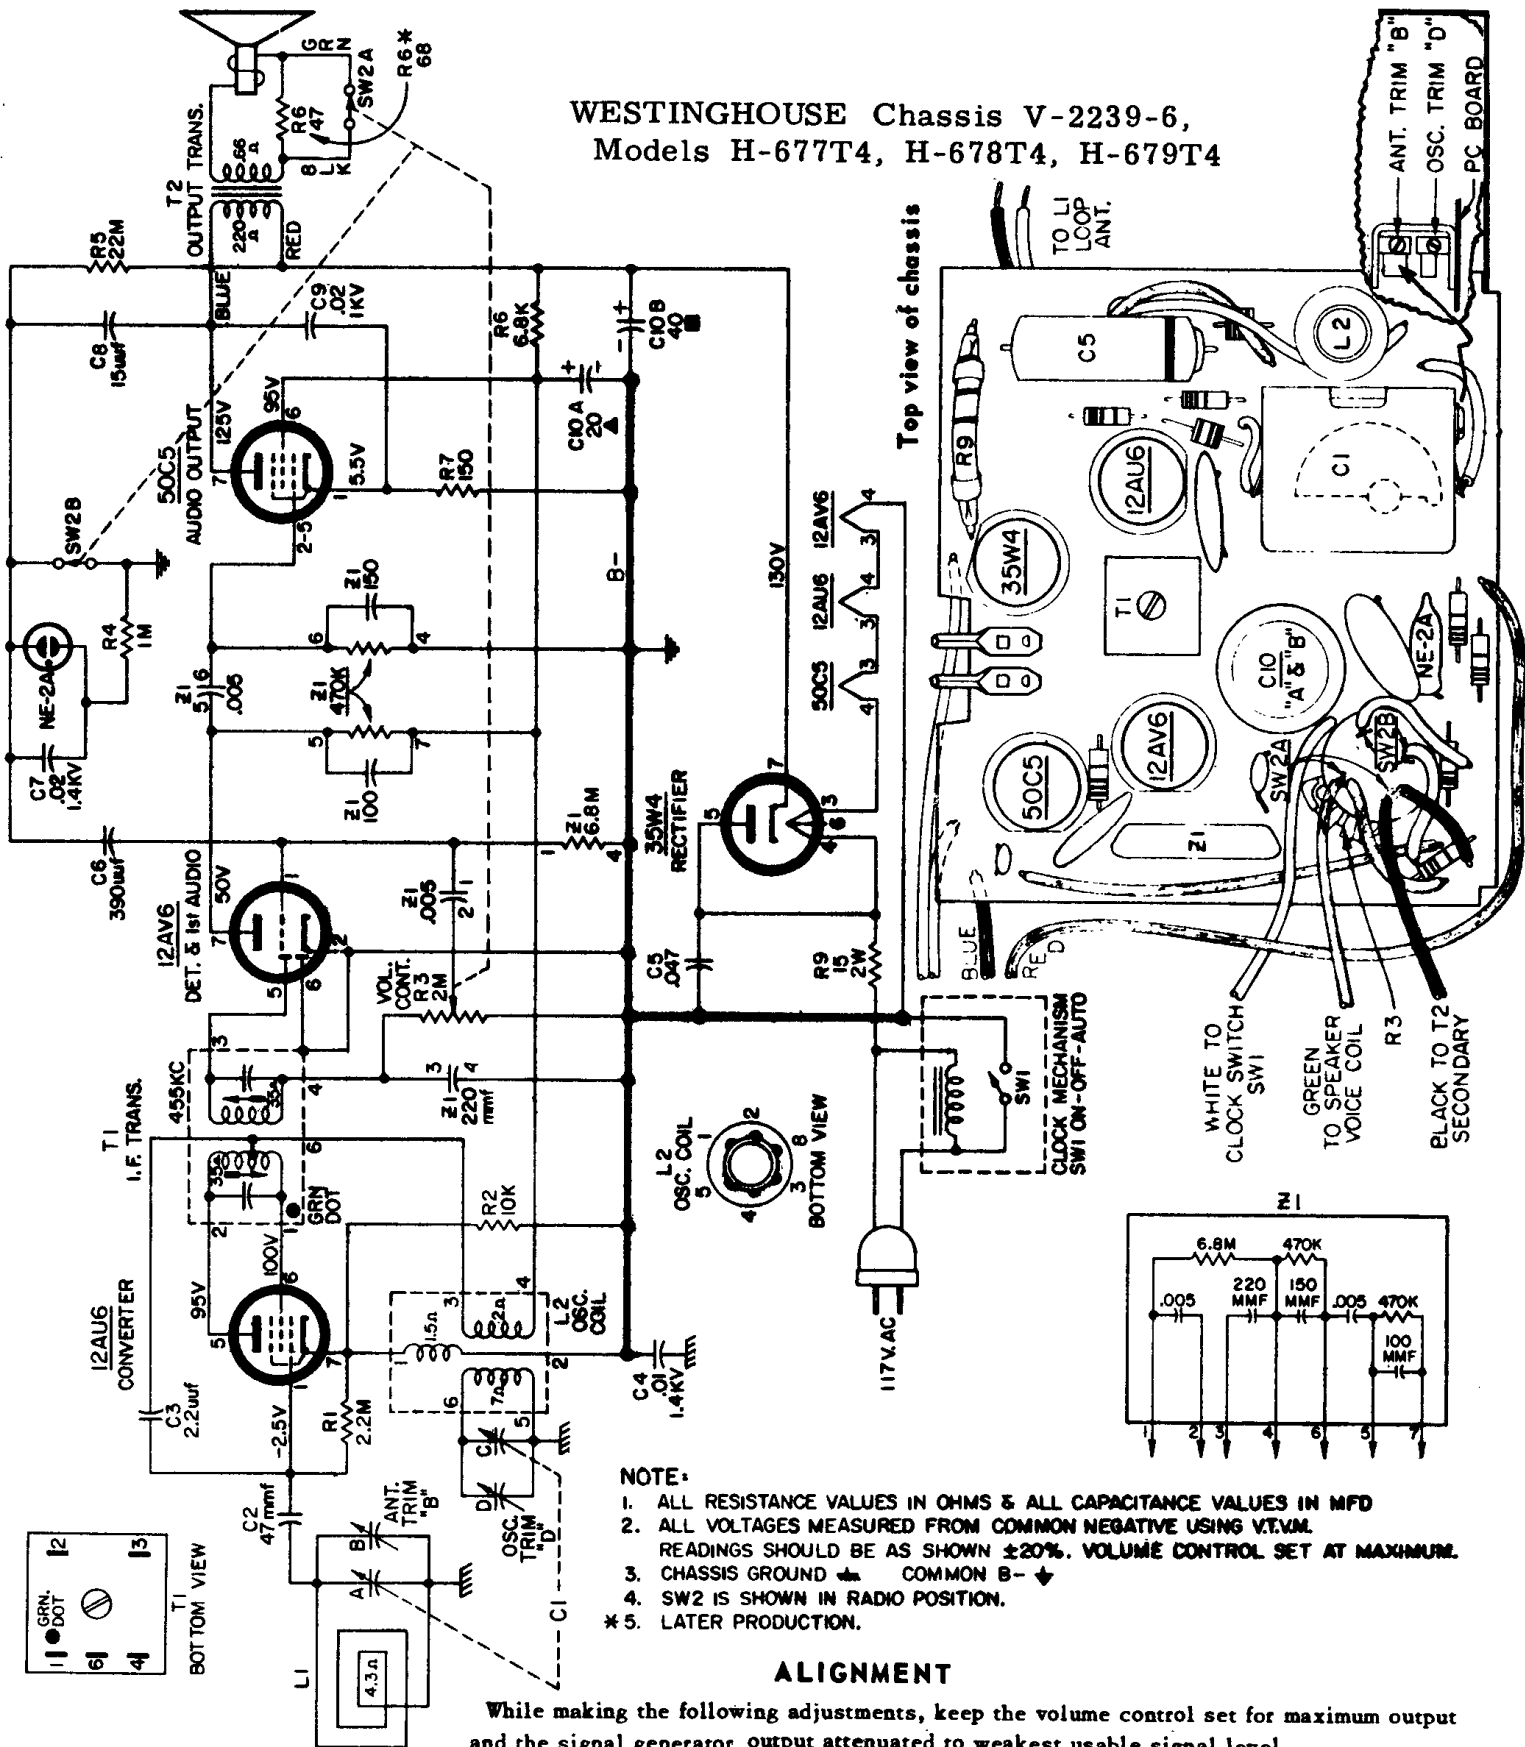

Step	Connect Signal Generator to -	Signal Gen. Frequency	Radio Dial	Connect VTVM Across Voice Coil and Adjust for Maximum Output -
1	Stator of ant. tuning capacitor (A) through a 200 mfd capacitor.	455 KC 400 Cps. 30% Mod.	Minimum capacity	Top and bottom slugs of T1. *
2	Radiated signal	1625 KC	Minimum capacity	Oscillator trimmer (D)
3	Radiated signal	1400 KC	1400 KC	Antenna trimmer (B)

\* It is recommended that a fiber aligning tool that snugly fits the slot in the powdered iron core be used to prevent chipping of the slot.