


DET.-OSC.
6AG6
6AB

I.F. TUBE
6K7G
6K7


2ND DET. A.K.C.
6H6G
6H6

1ST AUDIO TUBE
6F5G
6F5

POWER
6P6G
6P6

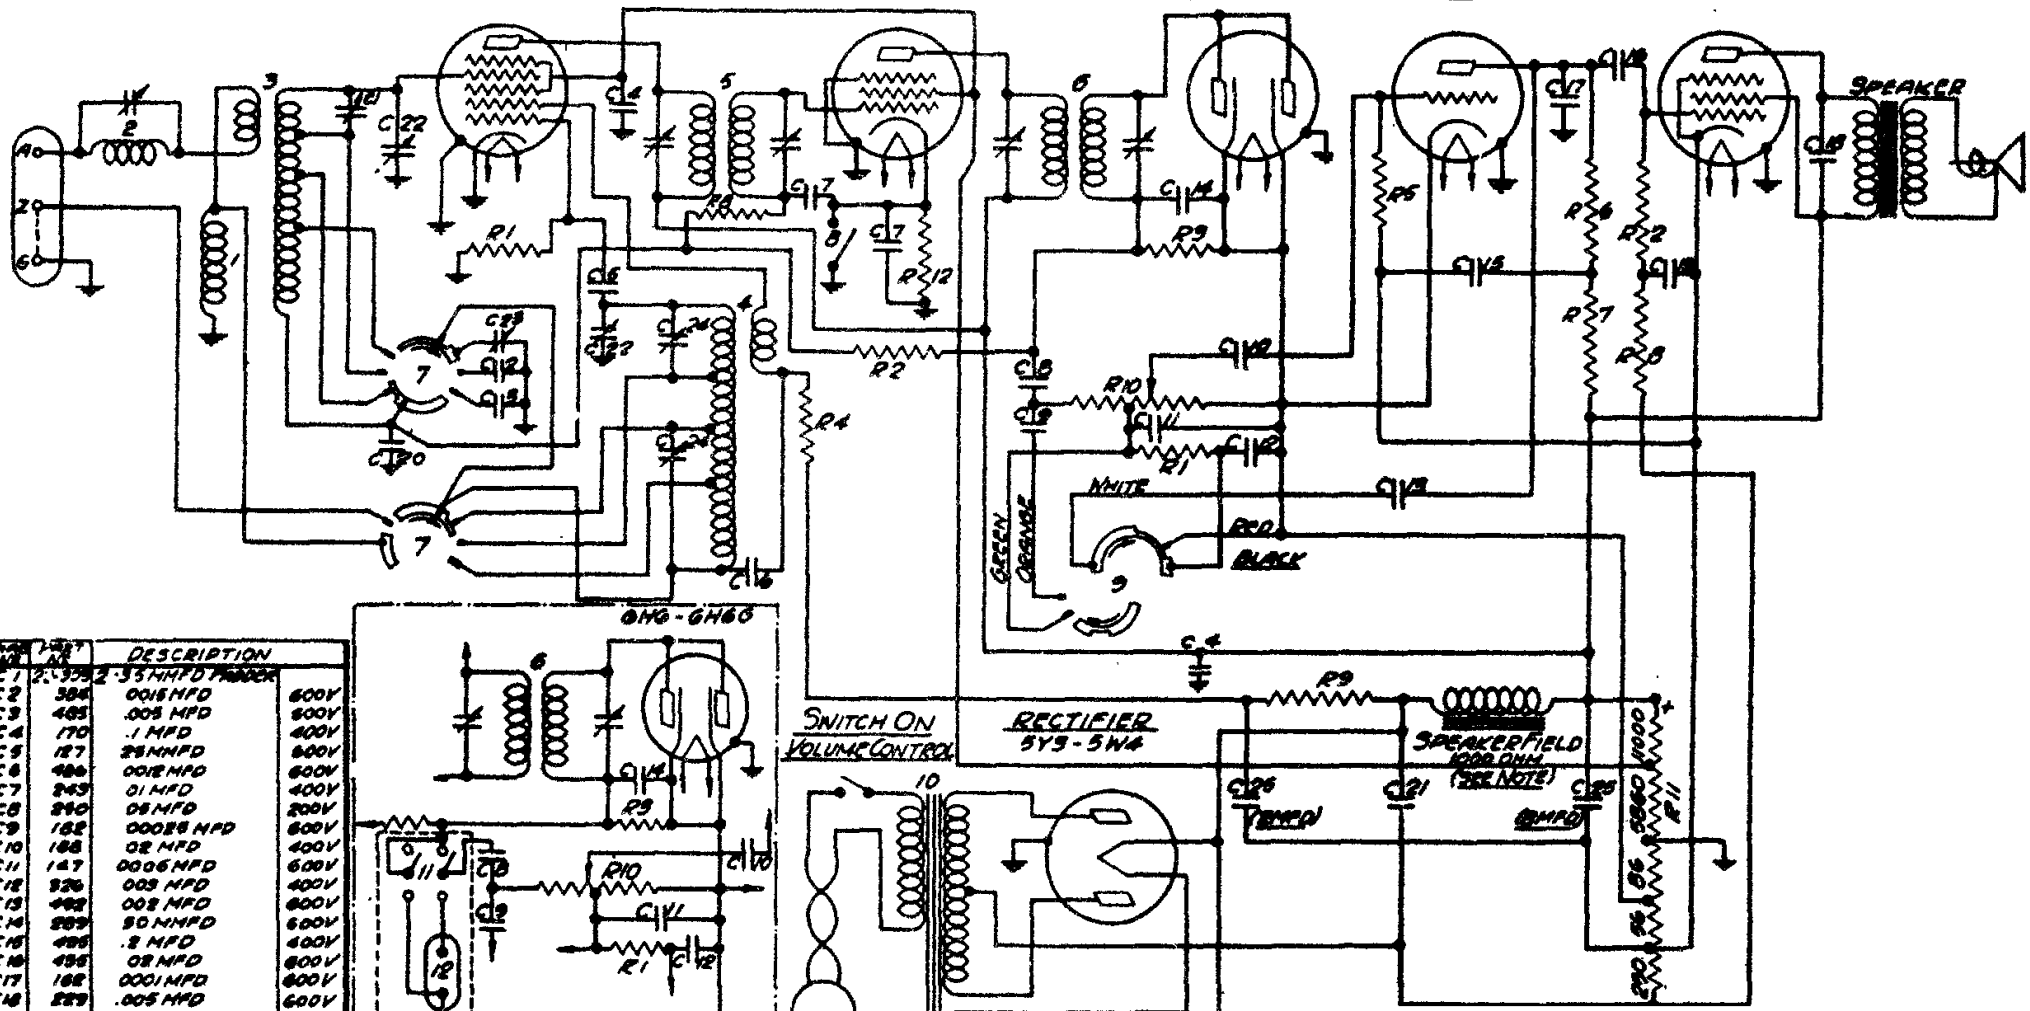

COMPONENT	DESCRIPTION	VALUE
C1	2.5 MFD 500V	2.5 MFD 500V
C2	384 0.015 MFD 500V	384 0.015 MFD 500V
C3	483 0.05 MFD 500V	483 0.05 MFD 500V
C4	170 .1 MFD 400V	170 .1 MFD 400V
C5	127 25 MFD 500V	127 25 MFD 500V
C6	486 0.01 MFD 500V	486 0.01 MFD 500V
C7	243 0.1 MFD 400V	243 0.1 MFD 400V
C8	260 0.5 MFD 200V	260 0.5 MFD 200V
C9	162 0.0025 MFD 500V	162 0.0025 MFD 500V
C10	188 0.2 MFD 400V	188 0.2 MFD 400V
C11	147 0.005 MFD 500V	147 0.005 MFD 500V
C12	526 0.03 MFD 400V	526 0.03 MFD 400V
C13	482 0.02 MFD 500V	482 0.02 MFD 500V
C14	283 50 MFD 500V	283 50 MFD 500V
C15	486 .2 MFD 400V	486 .2 MFD 400V
C16	456 0.5 MFD 500V	456 0.5 MFD 500V
C17	188 0.001 MFD 500V	188 0.001 MFD 500V
C18	229 .005 MFD 500V	229 .005 MFD 500V
C19	218 .05 MFD 200V	218 .05 MFD 200V
C20	487 .05 MFD 500V	487 .05 MFD 500V
C21	594 16 MFD 450V	594 16 MFD 450V
C22	482 25 MFD VARIABLE COND.	482 25 MFD VARIABLE COND.
C23	208 200-300 MFD 50V	208 200-300 MFD 50V
C24	406 2-55 MFD TRIMMER	406 2-55 MFD TRIMMER
C25	491 218 DRY ELEC.	491 218 DRY ELEC.

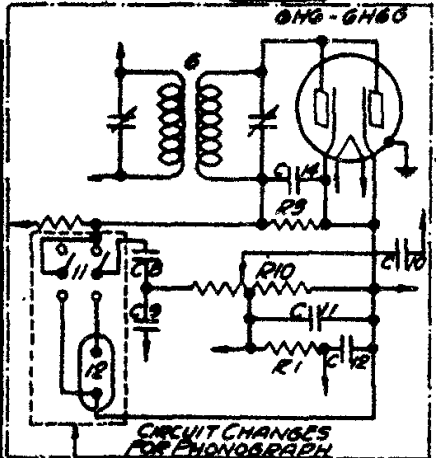

COMPONENT	DESCRIPTION	VALUE
R1	25-134 ANTENNA CHOKE	25-134 ANTENNA CHOKE
R2	20-133 WAVE TRAP ASSEM.	20-133 WAVE TRAP ASSEM.
R3	5-4384 ANTENNA COIL ASSEMBLY	5-4384 ANTENNA COIL ASSEMBLY
R4	3-4389 OSC. COIL ASSEMBLY	3-4389 OSC. COIL ASSEMBLY
R5	06-553 1ST I.F. TRANSFORMER	06-553 1ST I.F. TRANSFORMER
R6	06-554 2ND I.F. TRANSFORMER	06-554 2ND I.F. TRANSFORMER
R7	05-90 BAND SELECT SWITCH	05-90 BAND SELECT SWITCH
R8	05-91 SENSITIVITY CONTROL	05-91 SENSITIVITY CONTROL
R9	05-92 TONE CONTROL SWITCH	05-92 TONE CONTROL SWITCH
R10	05-285 POWER TRANS. 115V-500V 0.25A	05-285 POWER TRANS. 115V-500V 0.25A
R11	05-290 POWER TRANS. 250V 0.1A ALL WGT	05-290 POWER TRANS. 250V 0.1A ALL WGT
R12	05-59 PHONO. SWITCH	05-59 PHONO. SWITCH
R13	44-7 PHONO. JACK	44-7 PHONO. JACK

NOTE: — 492-519 16 MFD DRY ELEC.
REPLACE 492-519 WRT ELEC. IN
MODEL 63-147 END TABLE

SWITCH ON
VOLUME CONTROL

RECTIFIER
5Y3-5W4

SPEAKERFIELD
1000 OHM

Models 6-S-128, 6-S-137,
6-S-147, 6-S-152, 6-S-157.
(Chassis No. 5634)

SPEAKERS	MODELS
49-117-8"	63-128
	63-137
49-118-10"	63-147
	63-152
	63-157

I.F. FREQUENCY 456 K.C.
6 TUBE SUPERHETERODYNE - 3 BAND
CHASSIS NO 5634

ZENITH RADIO CORPORATION
CHICAGO, ILLINOIS