


PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
C1	2E-857 TWO-DIODE VARIABLE	R1	63-715 47M OHM	4	56802 1E I.F. TRANS. ASSEMBLY
C2	2E-858 0.5MFD.	R2	63-591 25M OHM	5	56803 2E I.F. TRANS.
C3	2E-859 0.5MFD.	R3	63-570 15 OHM	6	56897 AUTOMATIC TUNING UNIT ASSEM.
C4	2E-860 100MFD.	R4	63-572 2.2 MEGOHM	7	MS 517 TONE CONTROL SWITCH
C5	2E-861 0.2MFD.	R5	63-1028 VOLUME CONTROL	8	100-79 BALLAST TUBE
C6	2E-862 100MFD.	R6	63-724 47 MEGOHM	9	100-79 PILOT LIGHT BULB 2.9V .17A
C7	2E-863 0.1MFD.	R7	63-573 250 M OHM	10	85-82 PHONO SWITCH
C8	2E-864 0.05MFD.	R8	63-574 470 M OHM	11	85-81 PHONO STOP SWITCH
C9	2E-865 0.05MFD.	R9	63-686 150 OHM WIREWOUND	12	AC SWITCH
C10	2E-866 0.05MFD.	R10	63-593 47M OHM		
C11	2E-867 0.05MFD.	R11	63-594 47M OHM		
C12	2E-868 0.05MFD.	R12	63-717 250 OHM		
C13	2E-869 0.05MFD.	R13	63-718 250 OHM		
C14	2E-870 0.05MFD.	R14	63-719 250 OHM		
C15	2E-871 0.05MFD.				
C16	2E-872 0.05MFD.				
C17	2E-873 0.05MFD.				
C18	2E-874 0.05MFD.				

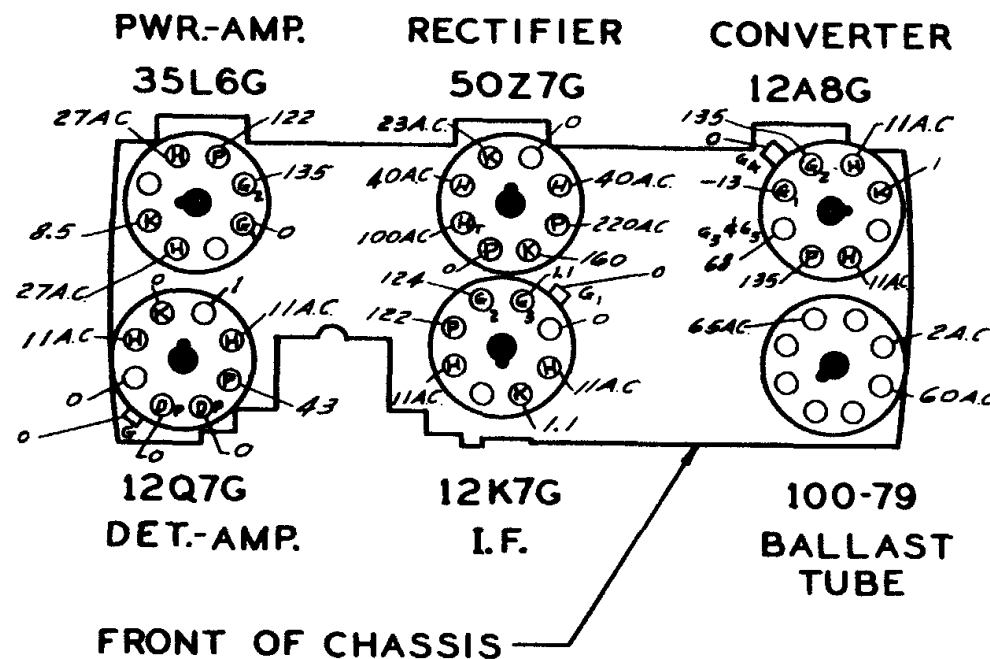

I.F. FREQUENCY 455KC
6 TUBE SUPERHETERODYNE
VOLTAGE DOUBLER A.C.
CHASSIS N°5672-P
ZENITH RADIO CORPORATION

Model 6R485
Chassis No. 5672P