

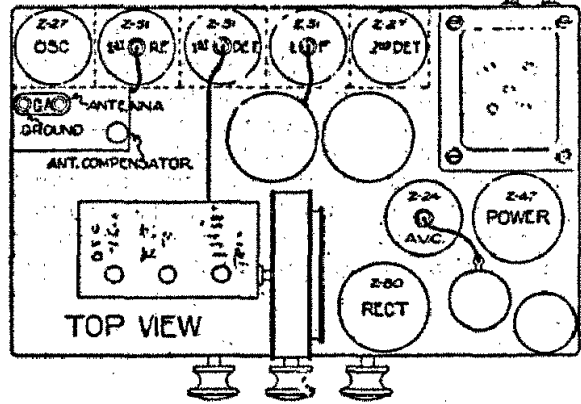


MODEL AH, CH, RH ZENITH RADIO CORP.

Models AH, CH, RH, 90 (1932)



I.F. Peak 175 KC

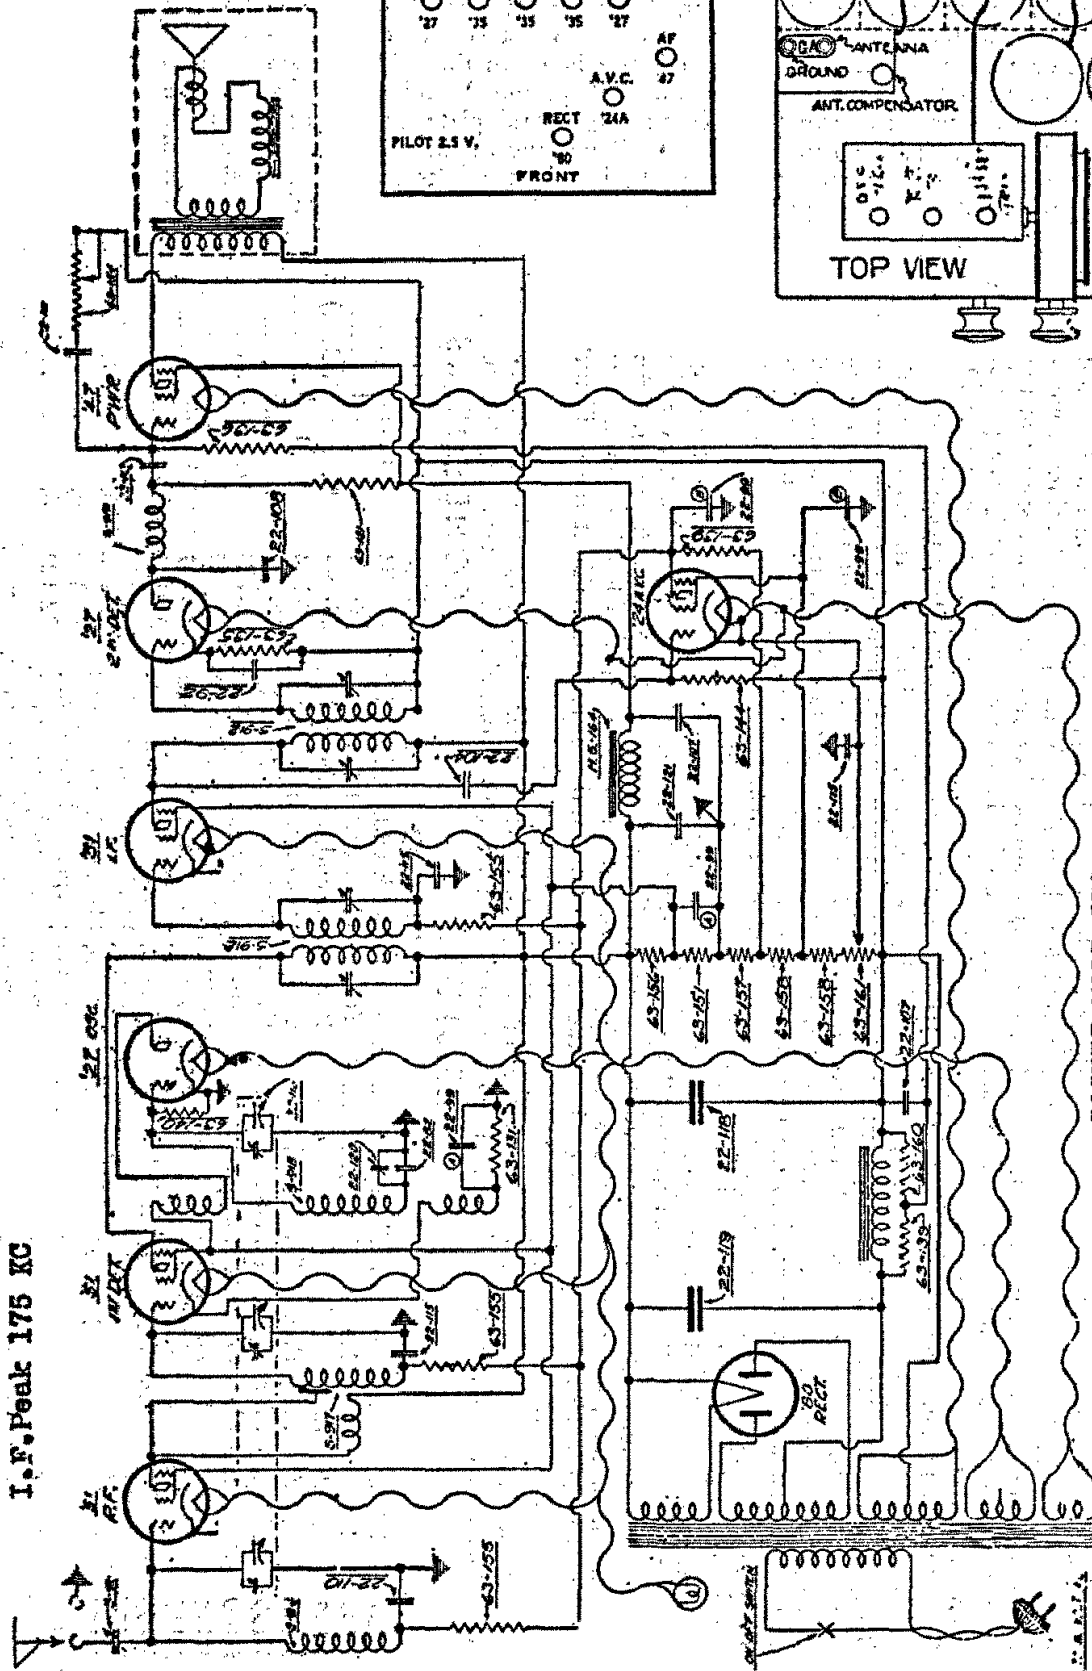

SOCKET VOLTAGES

| Type | Position | Fil. Volts | Plate Volts | Control Grid Volts | Cathode Volts | Plate M.A. | S.G. Volts |
|------|----------|------------|-------------|--------------------|---------------|------------|------------|
| Z51 | R. F. | 2.25 | 170 | -4 | 0 | 4.5 | 64 |
| Z51 | 1st Det. | 2.25 | 165 | -1.5 | 1.5 | 3. | 62 |
| Z27 | Osc. | 2.1 | 55 | 0 | 0 | 4.5 | 0 |
| Z51 | I. F. | 2.3 | 180 | -5.6 | 0 | .75 | 80 |
| Z27 | 2nd Det. | 2.15 | 160 | -14.5 | 8.5 | .80 | 0 |
| Z47 | Power | 2.3 | 250 | -15 | 0 | 28. | 250 |
| Z24 | A. V. C. | 2.1 | 8 | -5 | 0 | 0 | 40 |
| Z80 | Rect. | 4.7 | 0 | 0 | 0 | 34. ca. | 0 |

Voltage readings taken with a Weston type 566 tester. Manual volume control in maximum position and antenna and ground disconnected. Line voltage 112.