


COMP. NO.	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
C1	22 503	5 MFD	1	20-71 ANTENNA CHOK
C2	487	05 MFD	2	5-4419 ANTENNA COIL ASSEM
C3	224	1 MFD	3	122-15 TUNING METER
C4	127	25 MFD	4	5-4420 OSCILLATOR COIL ASSEM
C5	170	1 MFD	5	95-953 1ST I.F. TRANSFORMER
C6	486	0012 MFD	6	95-954 2ND I.F. TRANSFORMER
C7	245	01 MFD	7	95-289 POWER TRANSFORMER 115V/30 60 CYCLE
C8	289	80 OHMS	8	95-290 POWER TRANSFORMER 25 CYCLE ALL VOLT
C9	250	05 MFD	9	94421 DETECTOR COIL ASSEM
C10	182	00025 MFD	10	85-93 BAND SELECTOR SWITCH
C11	147	0005 MFD	11	85-92 TONE CONTROL SWITCH
C12	326	005 MFD	12	85-91 SENSITIVITY CONTROL SWITCH
C13	188	02 MFD	13	20-195 RF PLATE CHOK
C14	495	2 MFD	14	85-59 PHONOGRAPH SWITCH
C15	492	002 MFD	15	44 7 PHONOGRAPH JMK
C16	485	005 MFD		
C17	384	0015 MFD		
C18	219	05 MFD		
C19	162	0001 MFD		
C20	491	8.2 MFD DEY ELEC		
C21	294	16 MFD RTY ELEC COND		
C22	488	5 GANG VARIABLE COND		
C23	205	200-550 MFD PADDER		
C24	229	005 MFD		
C25	408	2 95 MFD TRIMMER		
C26	495	02 MFD		
R1	65-275	89 M OHMS		
R2	309	700 OHMS		
R3	280	49 M OHMS		
R4	261	9900 OHMS		
R5	298	980 M OHMS		
R6	378	11 M OHMS		
R7	481	400 M OHMS		
R8	523	2 MEG OHMS		
R9	258	480 M OHMS		
R10	376	190 M OHMS		
R11	553	18 M OHMS		
R12	522	2 MEG OHMS		
R13	515	2 MEG OHMS		

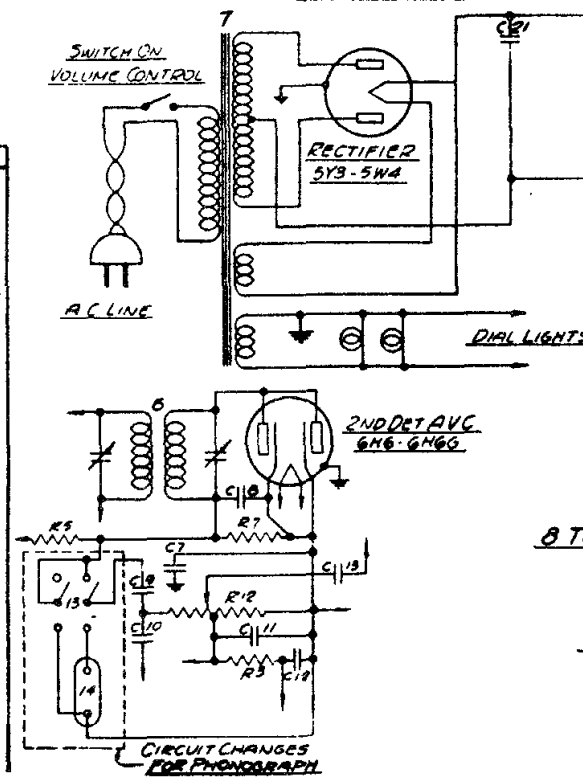

Models 8-S-129, 8-S-154
(Chassis No. 5801)

I.F. FREQUENCY 456 K.C.
8 TUBE SUPERHETERODYNE - 3 BAND
CHASSIS NO 5801

ZENITH RADIO CORPORATION