


Models 12-S-205, 12-S-232, 12-S-245, 12-S-265, 12-S-266, 12-S-267, 12-S-268 (1204 Chassis)

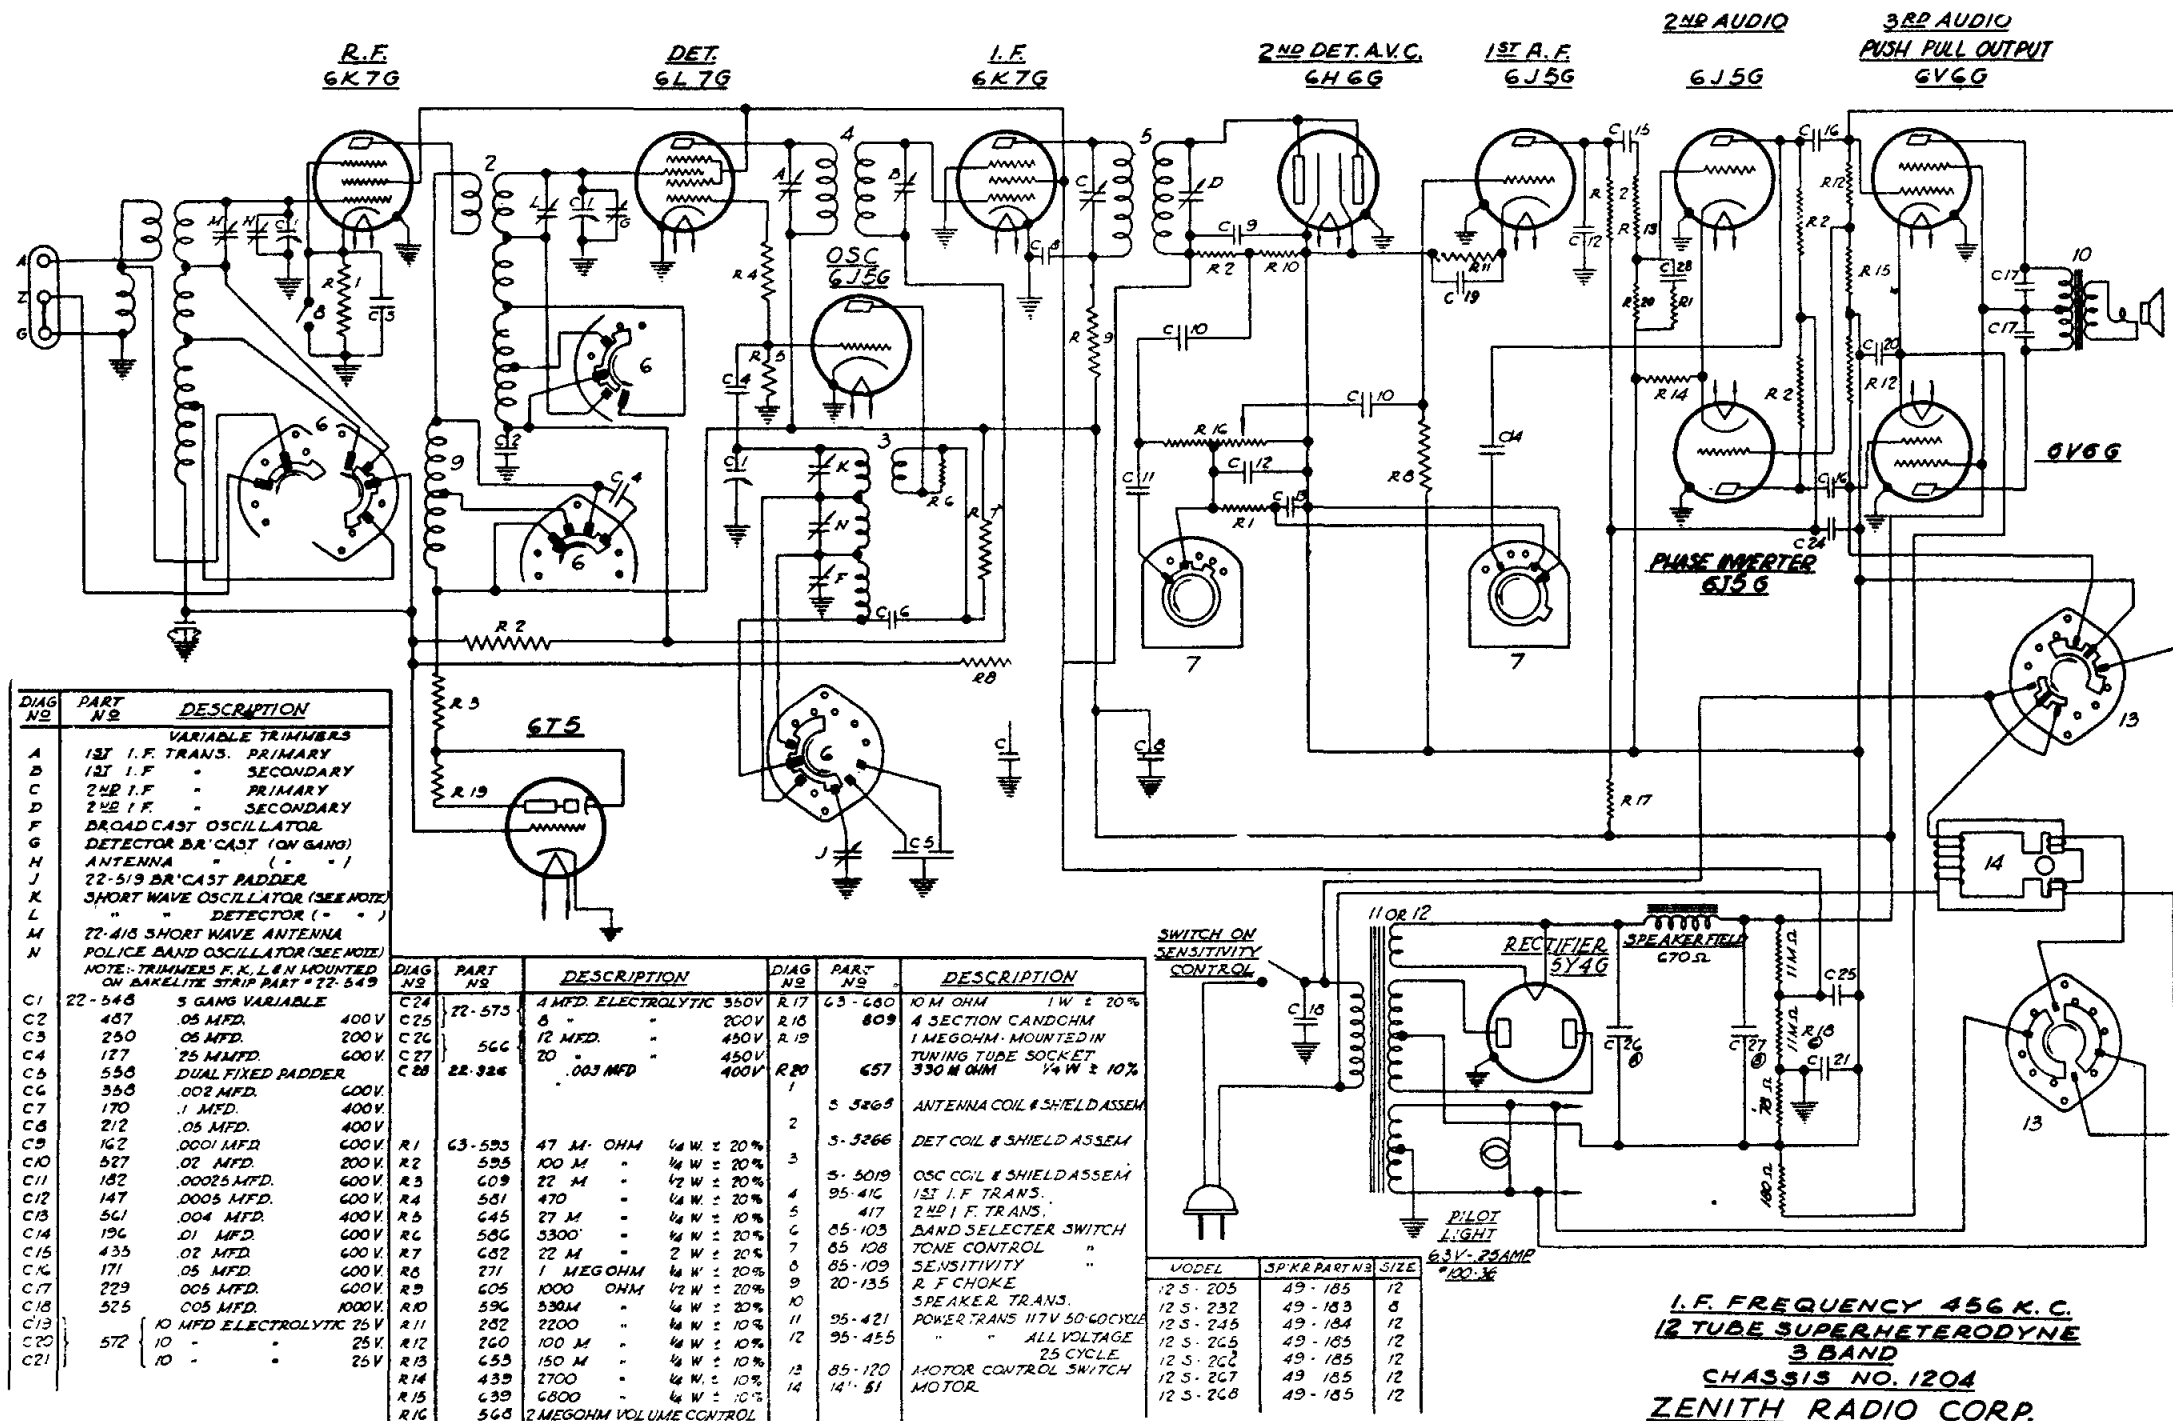

DIAG NO	PART NO	DESCRIPTION
A	151	I.F. TRANS. PRIMARY
B	151	I.F. TRANS. SECONDARY
C	242	I.F. TRANS. PRIMARY
D	242	I.F. TRANS. SECONDARY
F		BROADCAST OSCILLATOR
G		DETECTOR BR'CAST (ON GANG)
H		ANTENNA " " " "
J	22-519	BR'CAST PADDER
K		SHORT WAVE OSCILLATOR (SEE NOTE)
L		" " DETECTOR " " "
M	22-418	SHORT WAVE ANTENNA
N		POLICE BAND OSCILLATOR (SEE NOTE)
NOTE: TRIMMERS F, K, L & N MOUNTED ON BAKELITE STRIP PART # 22-549		
C1	22-548	5 GANG VARIABLE
C2	547	.05 MFD. 400V
C3	250	.05 MFD. 200V
C4	127	.25 M.MFD. 600V
C5	556	DUAL FIXED PADDER
C6	356	.002 MFD. 600V
C7	170	.1 MFD. 400V
C8	212	.05 MFD. 400V
C9	162	.0001 MFD. 600V
C10	527	.02 MFD. 200V
C11	182	.00025 MFD. 600V
C12	147	.0005 MFD. 600V
C13	561	.004 MFD. 400V
C14	196	.01 MFD. 600V
C15	435	.02 MFD. 600V
C16	171	.05 MFD. 600V
C17	229	.005 MFD. 600V
C18	325	.005 MFD. 1000V
C19	572	10 MFD ELECTROLYTIC 25V
C20	10	" " 25V
C21	10	" " 25V

DIAG NO	PART NO	DESCRIPTION
C24	22-573	4 MFD. ELECTROLYTIC 350V
C25	225	" " 200V
C26	566	12 MFD. " 450V
C27	20	" " 450V
C28	22-326	.003 MFD. 400V
R1	63-593	47 M. OHM 1/4 W ± 20%
R2	595	100 M " 1/4 W ± 20%
R3	609	22 M " 1/2 W ± 20%
R4	581	470 " 1/4 W ± 20%
R5	645	27 M " 1/4 W ± 10%
R6	586	3300 " 1/4 W ± 20%
R7	652	22 M " 2 W ± 20%
R8	271	1 MEG OHM 1/4 W ± 20%
R9	605	1000 OHM 1/2 W ± 20%
R10	596	330M " 1/4 W ± 20%
R11	282	2200 " 1/4 W ± 10%
R12	260	100 M " 1/4 W ± 10%
R13	653	150 M " 1/4 W ± 10%
R14	439	2700 " 1/4 W ± 10%
R15	639	6800 " 1/4 W ± 10%
R16	568	2 MEG OHM VOLUME CONTROL

DIAG NO	PART NO	DESCRIPTION
R17	63-680	10 M OHM 1W ± 20%
R18	809	4 SECTION CANDCHAM 1 MEG OHM MOUNTED IN TUNING TUBE SOCKET
R19	657	330 M OHM 1/4 W ± 10%
1	5-3265	ANTENNA COIL & SHIELD ASSEM
2	5-3266	DET COIL & SHIELD ASSEM
3	5-5019	OSC COIL & SHIELD ASSEM
4	95-416	1ST I.F. TRANS.
5	417	2ND I.F. TRANS.
6	85-103	BAND SELECTOR SWITCH
7	85-108	TOUCH CONTROL
8	85-109	SENSITIVITY
9	20-135	R.F. CHOKE
10	95-421	SPEAKER TRANS.
11	95-455	POWER TRANS 117V 50-60CYCLE
12	85-120	" " ALL VOLTAGE 25 CYCLE
13	14-51	MOTOR CONTROL SWITCH

I.F. FREQUENCY 456 K.C.
12 TUBE SUPERHETERODYNE
3 BAND
CHASSIS NO. 1204
ZENITH RADIO CORP.