





RADIO SAFAR. — Modello « 73 ». · Produzione 1935. · Media frequenza: 470 kc.

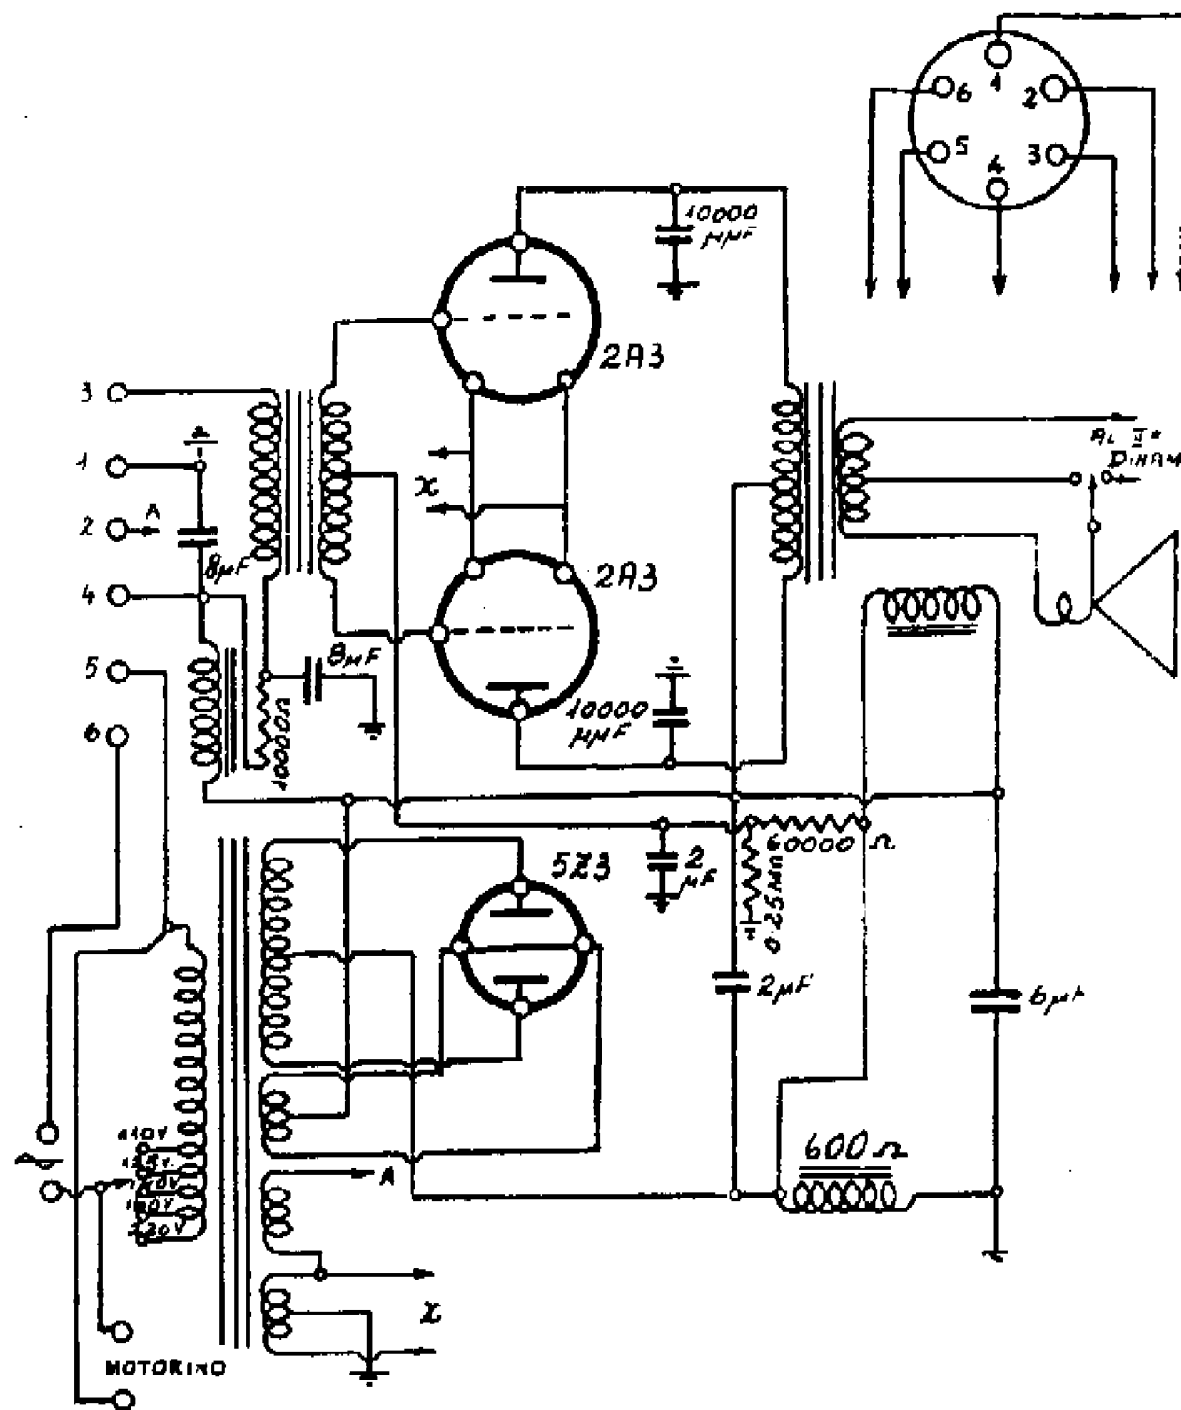

RADIO SAFAR. — Parte amplificatrice b. f. e alimentatrice  
del modelli «53 e 73».

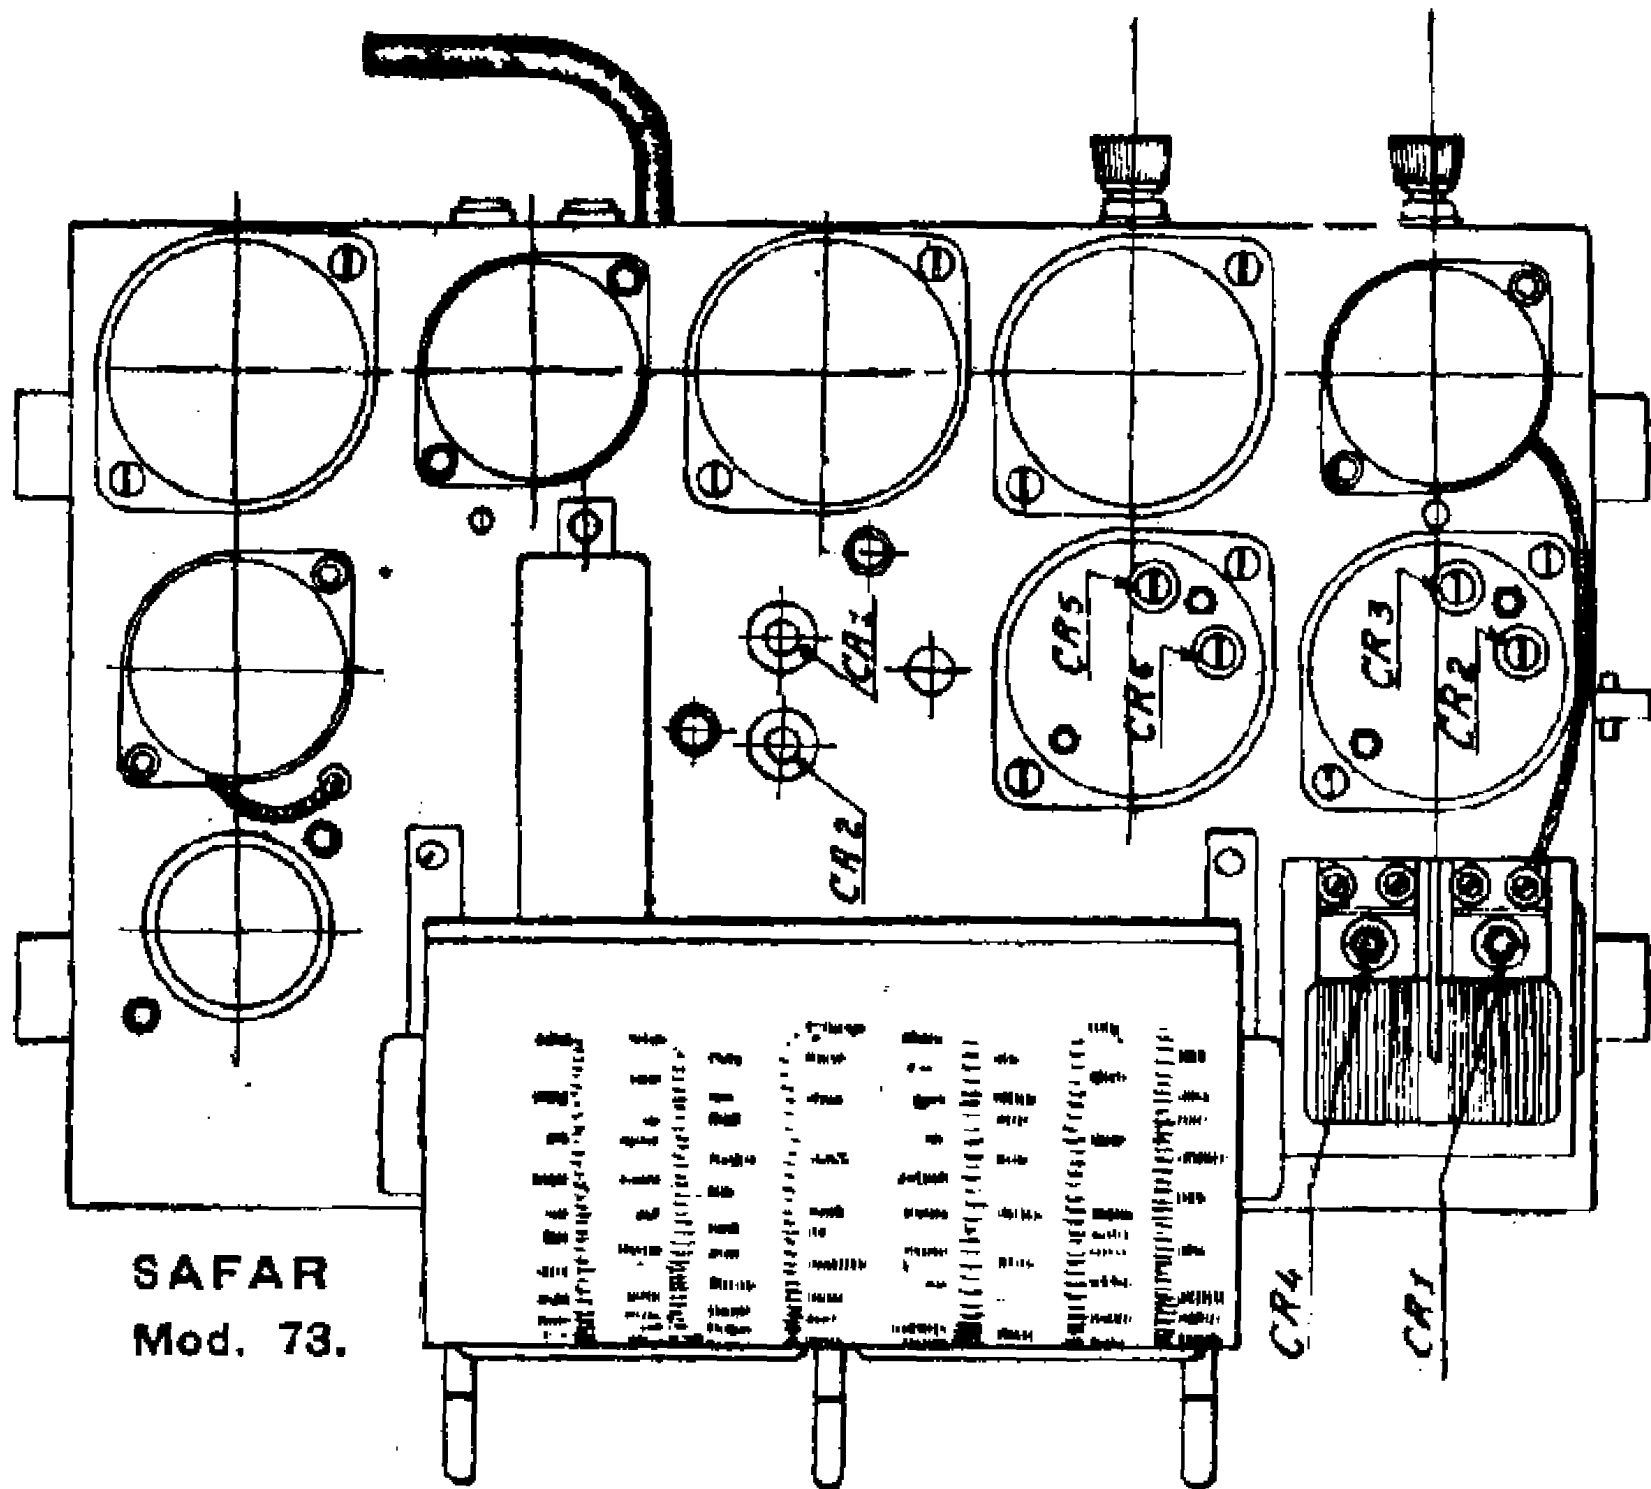

SAFAR  
Mod. 73.

# SAFAR

## Mod. 73

Valvola	Placca	Schermo	G. O.	Catodo
6A7	240	100	140	2
78	230	100	—	2
75	160	—	—	1,2
37	190	—	—	1,6
2A3	260	—	—	—
2A3	260	—	—	—
5Z3	2 X 340			

Media frequenza: 470 kHz.

Taratura OM: a 1200 kHz regolare CR2 e CR5; a 600 kHz regolare CA2, v. figura.

Taratura OL: a 270 kHz regolare CR3 e CR6; a 180 kHz regolare CA1.