



16TP4

16TP4
ET-T1067
Page 1
5-54

CATHODE-RAY TUBE

16-INCH RECTANGULAR, GLASS

FOCUS—MAGNETIC

DEFLECTION—MAGNETIC

70-DEGREE DEFLECTION ANGLE

13½- BY 10⅞-INCH PICTURE SIZE

FACEPLATE—SPHERICAL, GRAY

ION-TRAP GUN

EXTERNAL CONDUCTIVE COATING

DESCRIPTION AND RATING

The 16TP4 is a magnetic-focus and deflection, direct-view all-glass picture tube which provides a 13½- by 10⅞-inch picture for television applications. The electron gun is used with an external single-field ion-trap magnet. Other features of this tube include a high-quality gray faceplate which increases picture contrast and detail under high-ambient-light conditions, and a space-saving rectangular face shape. An external conductive coating serves as a filter capacitor when grounded.

GENERAL

ELECTRICAL

Heater Voltage 6.3 Volts
Heater Current $0.6 \pm 10\%$ Amperes

Focusing Method—Magnetic

Deflecting Method—Magnetic

Deflection Angle, approximate

Diagonal 70 Degrees
Horizontal 65 Degrees
Vertical 50 Degrees

Direct Interelectrode Capacitances, approximate

Cathode to All Other Electrodes 5 μf

Grid-No. 1 to All Other Electrodes 6 μf

External Conductive Coating to Anode

Maximum 2000 μf

Minimum 750 μf

OPTICAL

Phosphor Number—P4, Sulfide Type

Fluorescent Color—White

Phosphorescent Color—White

Persistence—Short

Faceplate—Gray

Light Transmission at Center, approximate 72 Percent

MECHANICAL

Over-all Length	18 1/8 ± 3/8	Inches
Greatest Bulb Dimensions		
Diagonal	16 1/8 ± 1/8	Inches
Width	14 3/4 ± 1/8	Inches
Height	11 1/2 ± 1/8	Inches

Minimum Useful Screen Dimensions		
Diagonal	14 7/8	Inches
Width	13 1/2	Inches
Height	10 1/8	Inches
Neck Length	6 7/8	Inches

Bulb Number, ASA Designation—J129-B1
Bulb Contact—Recessed Small-cavity Cap, JETEC No. J1-21
Base—Small-shell Duodecal 15-Pin, JETEC No. B5-57
Basing, JETEC Designation—12N
Bulb Contact Alignment
 Anode Contact Aligns with Pin No. 6 Position ±30 Degrees

Mounting Position—Any
Net Weight, approximate 16 Pounds

MAXIMUM RATINGS

DESIGN-CENTER VALUES*

Anode Voltage†	14,000 Max	Volts DC
Grid-No. 2 Voltage	410 Max	Volts DC
Grid-No. 1 Voltage		
Negative-Bias Value	125 Max	Volts DC
Positive-Bias Value	0 Max	Volts DC
Positive-Peak Value	2 Max	Volts
Peak Heater-Cathode Voltage‡		
Heater Negative with Respect to Cathode		
During Warm-up Period not to Exceed 15 Seconds	410 Max	Volts
After Equipment Warm-up Period	150 Max	Volts
Heater Positive with Respect to Cathode	150 Max	Volts

TYPICAL OPERATING CONDITIONS

Anode Voltage§	12,000	Volts DC
Grid-No. 2 Voltage	300	Volts DC
Grid-No. 1 Voltage¶	—28 to —72	Volts DC
Focusing-Coil Current▲, approximate	99	Milliamperes DC
Ion-Trap Field Intensity◆, approximate	35	Gausses

MAXIMUM CIRCUIT VALUES

Grid-No. 1 Circuit Resistance	1.5 Max	Megohms
-------------------------------	---------	---------

* The maximum ratings provide a ten-percent safety factor in accordance with the standard design-center system of rating cathode-ray tubes. The tube will withstand the combined effects of variations in line voltage and components provided the maximum design-center values are not exceeded by more than ten percent.

† Anode and grid-No. 3 which are connected together within the tube are referred to herein as anode.


‡ Cathode should be returned to one side or to the midtap of the heater transformer winding.

§ Brightness and focus quality decrease with decreasing anode voltage. In general, the anode voltage should not be less than 10,000 volts.

π For visual extinction of focused raster.

▲ For JETEC focusing coil No. 109 with distance from the yoke-reference-line to center-of-air-gap equal to $3\frac{3}{8}$ inches.

◆ Single-field ion-trap magnet adjusted to optimum position, equivalent to 35 milliamperes through JETEC ion-trap magnet No. 117.

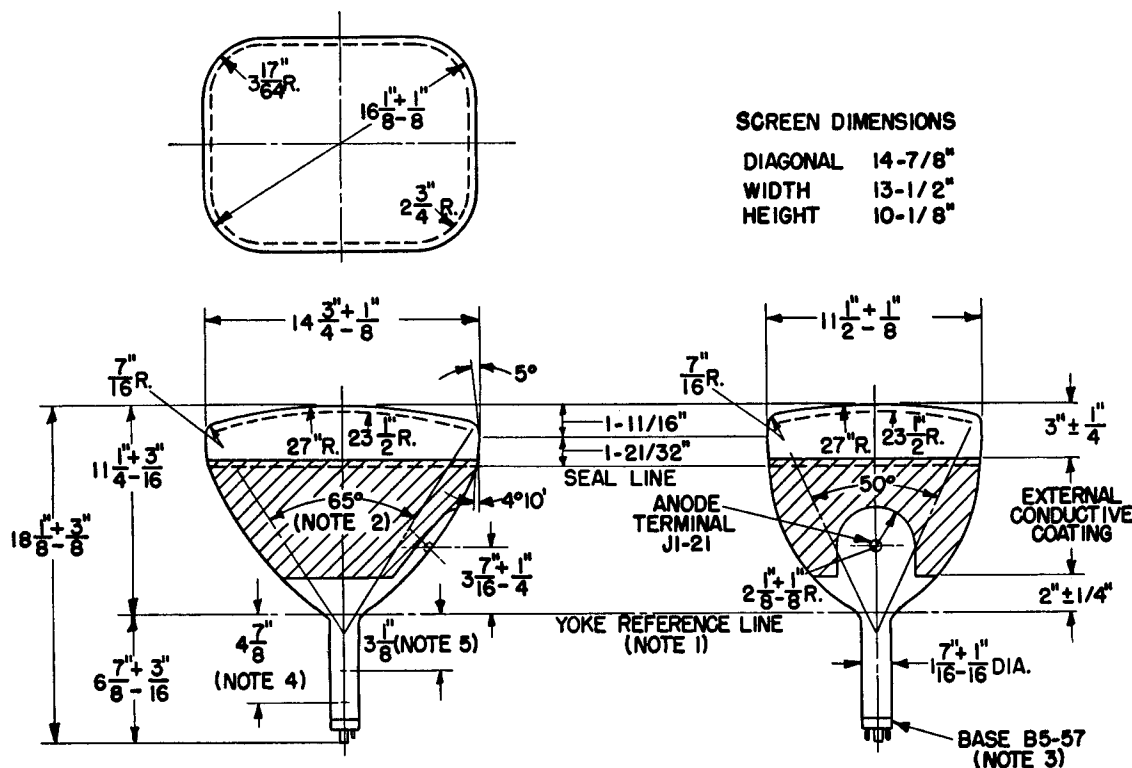

NOTES:

1. REFERENCE LINE IS DETERMINED BY THE PLANE OF THE UPPER EDGE OF THE REFERENCE-LINE GAGE (RETMA NO. 110) WHEN THE GAGE IS RESTING ON THE CONE.
2. DEFLECTION ANGLE ON DIAGONAL IS 70 DEGREES.
3. ANODE TERMINAL ALIGNS WITH PIN-NO. 6 POSITION ± 30 DEGREES.
4. APPROXIMATE POSITION OF ION-TRAP MAGNET.
5. RECOMMENDED POSITION FOR CENTER OF FOCUSING FIELD.

