



Service  
Service  
Service

# Service Manual



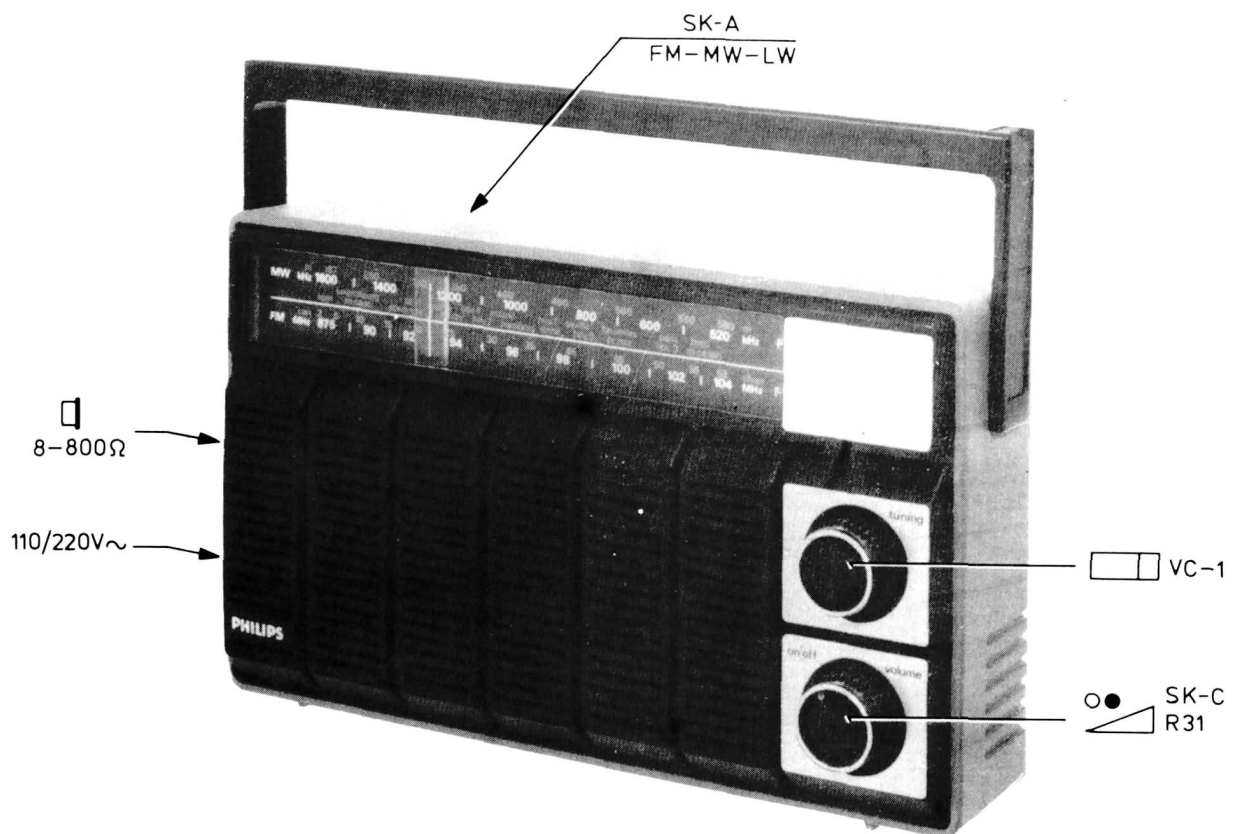





MW : 520 – 1605 kHz (577 – 187 m)  
LW : 150 – 255 kHz (2000 – 1150 m)  
FM : 87.5 – 104 MHz  
SUPPLY : 110/220V~



:  : 6V (4 x R14)

IF – AM : /00, /28 : 452 kHz  
IF – AM : /15 : 470 kHz  
IF – AM : /22 : 460 kHz  
IF – FM : 10.7 MHz

OUTPUT : 400 mW  $\pm$  1 dB (d = 10 %)

11729812

Wave range	 				
SK...	Signal to		Var. cap.	Adjust	Indication
MW (520-1605 kHz)	<div>1</div> via 20 nF to	<div>A</div>	Min. cap.	S13	<div>1</div> max.
				S10	
				S8	
	512 kHz	<div>C</div>	Max. cap.	S15	
	1635 kHz		Min. cap.	CT4	
	580 kHz		Tune in	S14	
	1400 kHz			CT3	
LW (150-255 kHz)	147 kHz	<div>C</div>	Max. cap.	CT5	<div>1</div> max.
	200 kHz		Tune in	S16	
FM (87.5-104 MHz)	10,7 MHz via 20 nF to	<div>B</div>	Min. cap.	S11	<div>1</div> max.
				S9	
				S7	
				S6	
				S5	
				S12	
	86.5 MHz	<div>E</div>	Max. cap.	S4	<div>1</div> max.
	105 MHz		Min. cap.	CT2	
	90 MHz		Tune in	S2	
	103 MHz			CT1	
<div><div></div><div>Repeat - Herhalen - Répéter - Wiederholen - Ricominciare - Repetera - Gentage - Gjentagelse - Toista</div></div>					

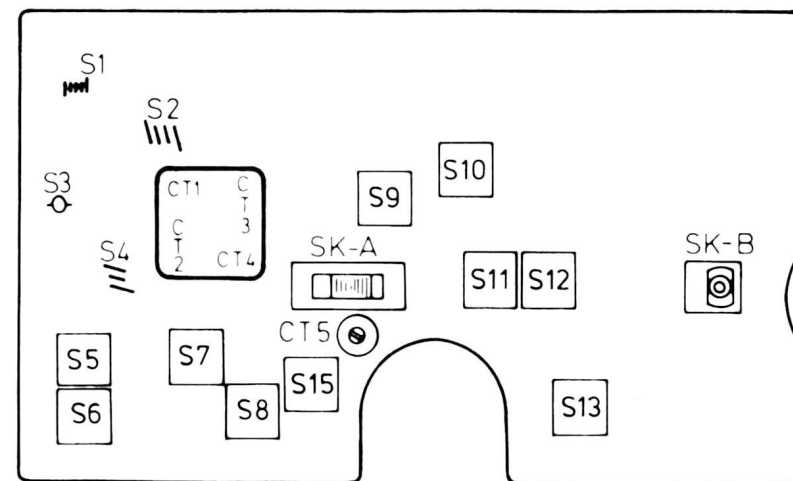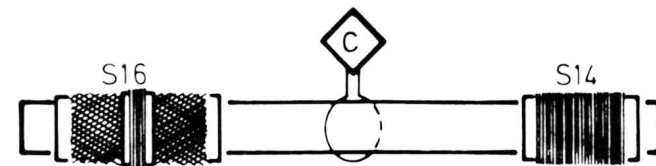

7822B/B

1 AM · IF /00/28/51 = 452 kHz  
 /15 = 470 kHz  
 /22 = 460 kHz

S	3	1	5	6	16b	4	2	7	16a	8	15	9	10	11	12	13	14b	14a	18	17											
C	7	1	8	3	2	5	4	6	17	35	33	36	19	48	22	20	23	49	44	27	42	46	26	51	45	53	59				
C	14	56	10	11	9	13	15	16	12	18	39	34	38	54	37	41	32	28	29	21	31	30	24	43	25	40	58	52	50	57	47
R	5	5	2	6	1	3	26	27	25	11	20	12	13	22	17	34	33	36	43	35	32	41	42								
R	7	4	8	9	28	44	10	24	23	30	21	19	16	18	15	29	39	37	38	40	31										

