

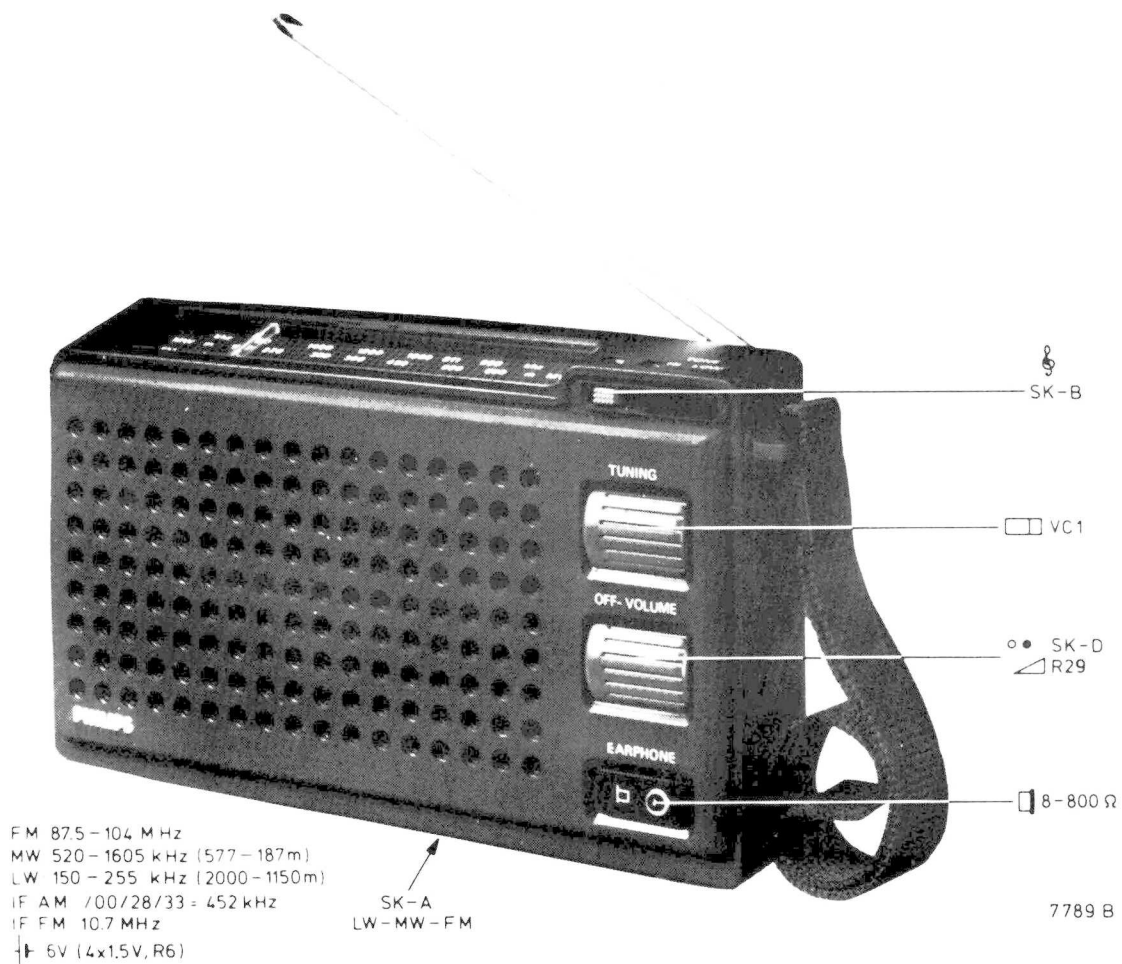


Service
Service
Service

Service Manual

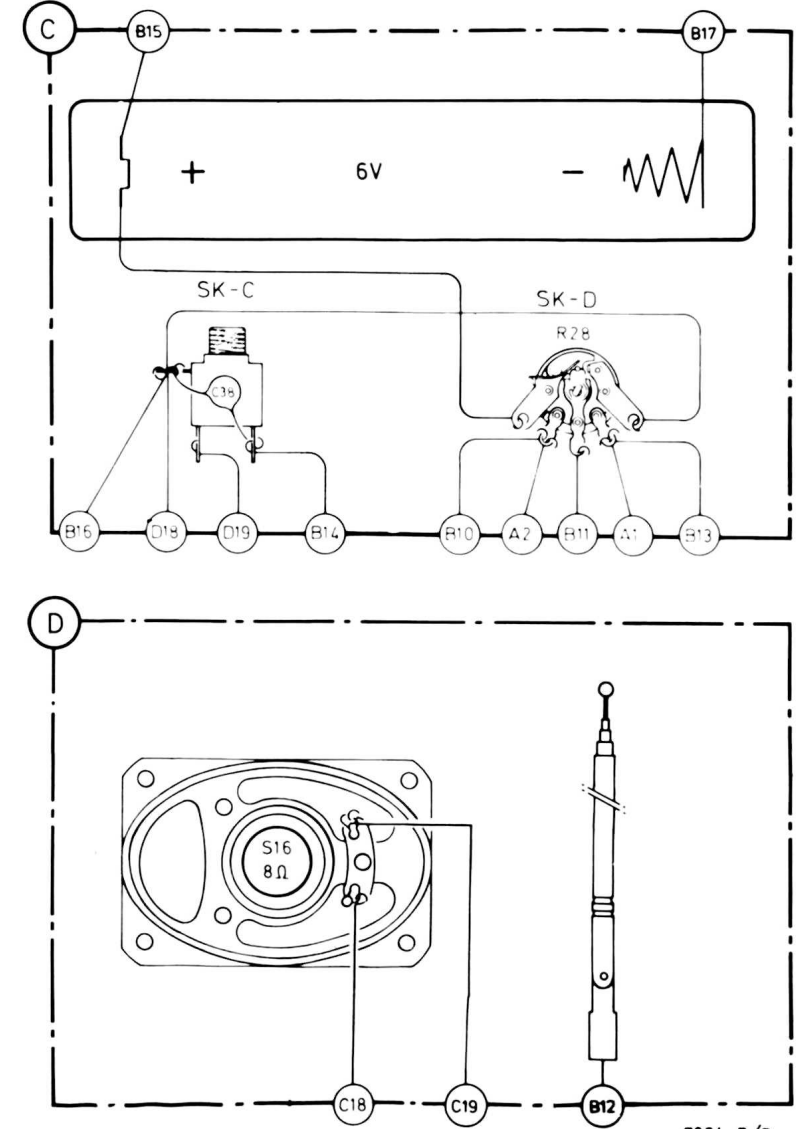

S	3 2 1 4 6 8b 5 8a 9 12 11 10										13 15 14 7b 7a					16				
C	53 3 6 11 2 1 8 10 34 16 42 19 15 20 40 25 22 46										47 29 30 27 33 49 43 44 45					38				
C	39 7 9 4 38 5 57 12 13 31 17 14 21 41 48 24 23										54 26 32 52 37 28 35 36 56									
R	2 3 1 22 27 9 8 17 11 12 38 37 13										39 30 25 26 32 24 35					28				
R	4 5 6 10 7 28 18 15 16										14 19 21 23 20 40 34 29 33 31									

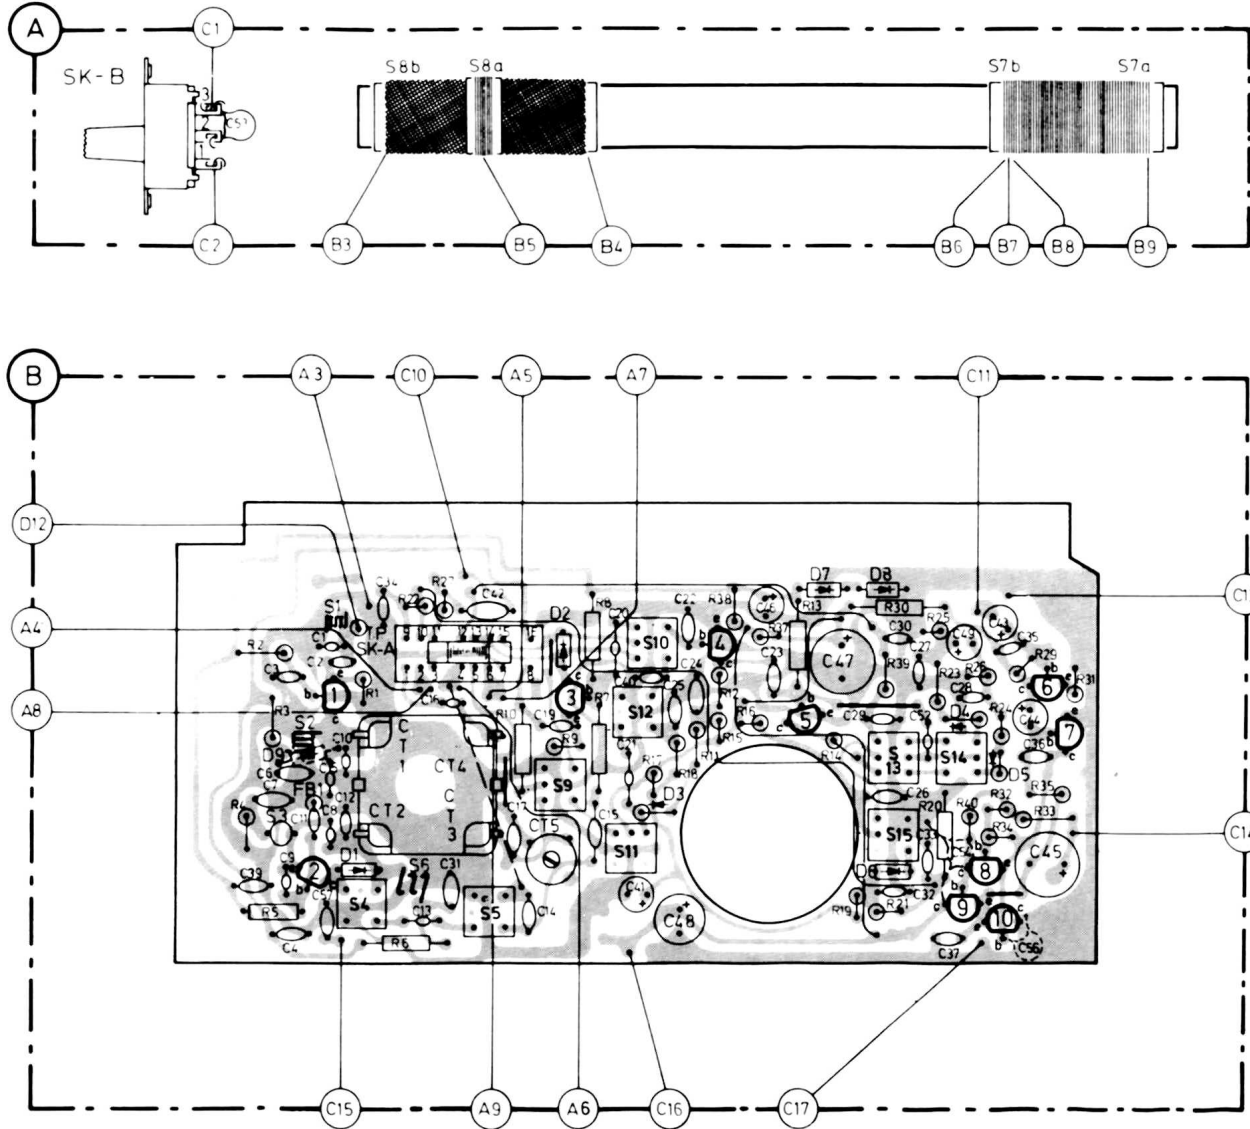

S	14 13 15														10 12 11 9 5 6 4 2 3														S
C	54 44 35 28 37 33 32 30 29 23 22 48 41 40														17 42 31 34 12 4 57 6 3														C
C	45 56 36 43 49 52 27 26 47 46 24 25 21 20 15 19 14														16 13 10 12 5 11 8 9 7 39														C
R	31	35	29	24	26	25	30	39	37	38	18	17	8	9	27	22	2	3	R										
R	33	34	32	40	20	23	21	19	14	13	16	12	15	11	7	10	6	1	5	4	R								

TS6

e	0.08V	0.08V
b	0.70V	0.70V
c	1.42V	1.42V

TS7


e	0V	0V
b	0.68V	0.68V
c	2.52V	2.52V

TS8

e	2.52V	2.52V
b	3.17V	3.17V
c	3.82V	3.82V

TS10

e	3.19V	3.19V
b	2.52V	2.52V
c	0V	0V

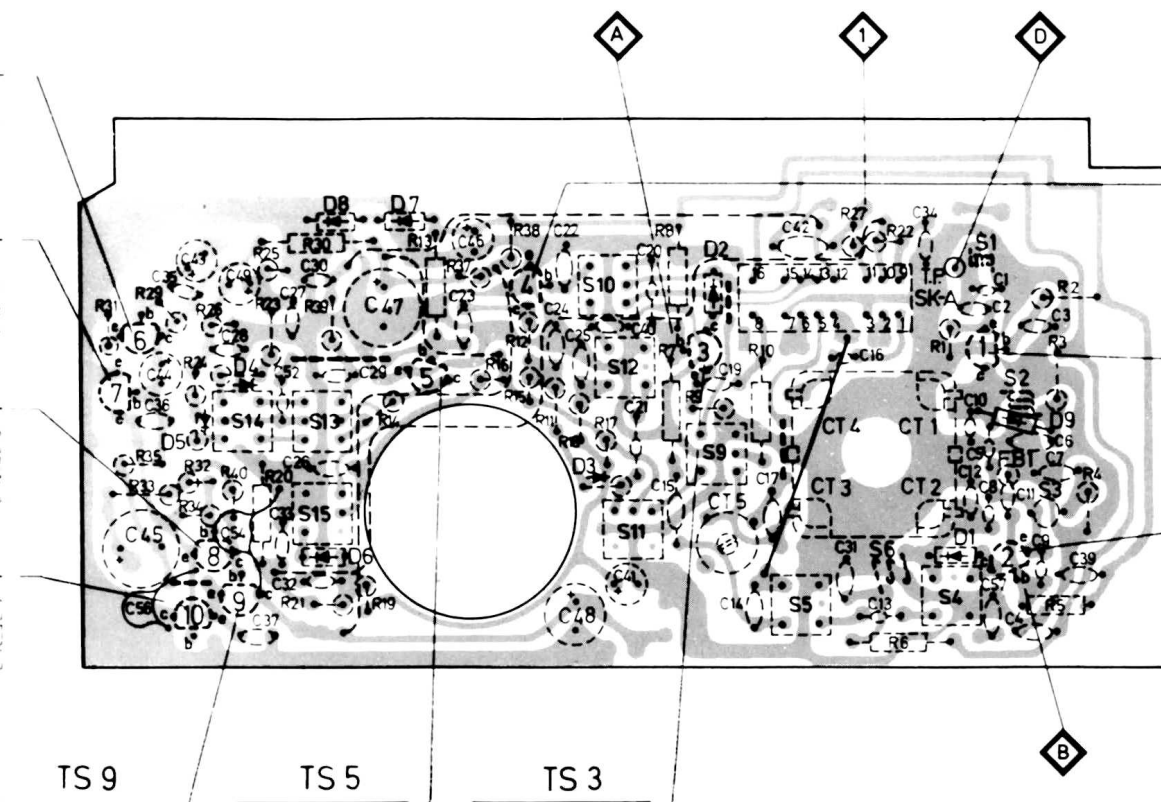

TS4

e	0V	0V
b	0.69V	0.69V
c	2.36V	2.36V

TS1

e	0.1V	0.52V
b	0.81V	1.19V
c	0.11V	4.54V

TS2

e	0.03V	0.52V
b	0.68V	1.10V
c	0.07V	5.05V

TS9

e	3.19V	3.19V
b	3.82V	3.82V
c	6V	6V


TS5

e	0V	0V
b	0.66V	0.67V
c	4.09V	4.03V


TS3

e	0.66V	0.52V
b	1.16V	1.19V
c	5.40V	5.26V


S4.5.12




S9.10.14







S11









S15



S13



Wave range SK....	Signal to 		Var.Cap. 	Adjust 	Indication 
MW(520-1605 KHz)	1 Via 20nF	A	Min. Cap	S15	1 max.
				S12	
				S11	
	512 KHz	C	Max. Cap	S 9	
	1635 KHz		Min. Cap	CT3	
	580 KHz		Tune-in	S7a,b	
	1400 KHz		CT4		
LW(150-255 KHz)	147 KHz	C	Max. Cap	CT5	1 max.
	200 KHz		Tune-in	S8a,b	
FM(87,5-104 MHz)	10,7 MHz	B	Min. Cap	S13	1 max.
				S10	
				S5	
				S4	
				S14	
	86,5 MHz	D	Max. Cap	S6	1 max.
	105 MHz		Min. Cap	CT2	
	90 MHz		Tune-in	S2	
	103 MHz		CT1		
Repeat - Herhalen - Répéter - Wiederholen - Recominciare Repetera - Gentage - Gjentagelse - Toista					

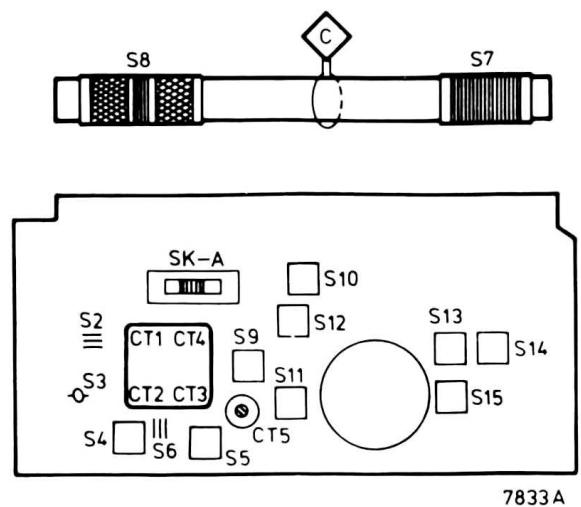

1 AM-IF /00/28/33: 452 kHz
 /15: 470 kHz
 /22: 460 kHz