


## MODEL T-728

(Continued on page 63, adjacent at right)

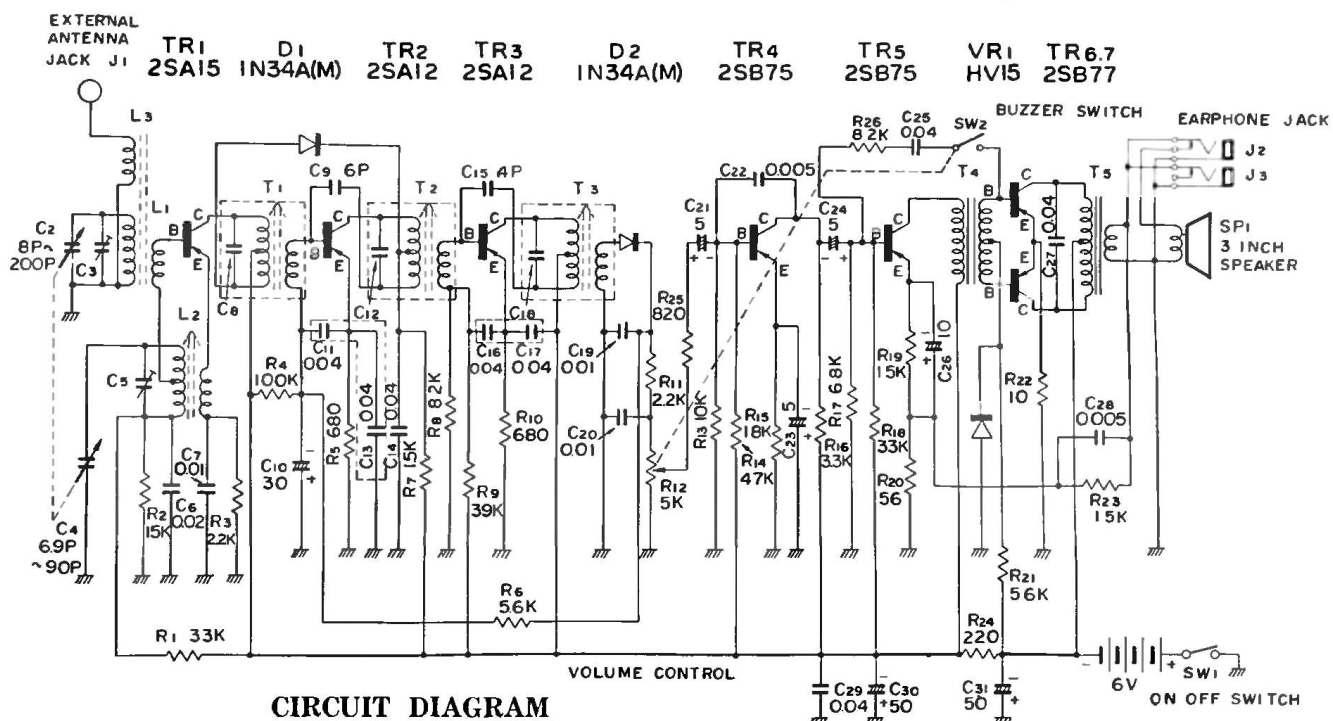

### CIRCUIT DIAGRAM

Voltages of each transistor electrode (V)


I. F. 455 KC.

	TR <sub>1</sub>	TR <sub>2</sub>	TR <sub>3</sub>	TR <sub>4</sub>	TR <sub>5</sub>	TR <sub>6</sub>	TR <sub>7</sub>
Base	1.2	0.7	0.6	0.7	0.7	0.1	0.1
Emitter	1.4	0.7	0.6	0.6	0.7	0.15	0.15
Collector	4.7	4.7	4.7	3.3	4	4.7	4.7

Resistance of transformer ( $\Omega$ )

	T <sub>1</sub>	T <sub>2</sub>	T <sub>3</sub>	T <sub>4</sub>	T <sub>5</sub>
Primary	4.8	4.8	4.4	1.2K	30
Second	0.8	0.4	0.3	700	1

### CHASSIS ASSEMBLY VIEW FROM COMPONENT SIDE

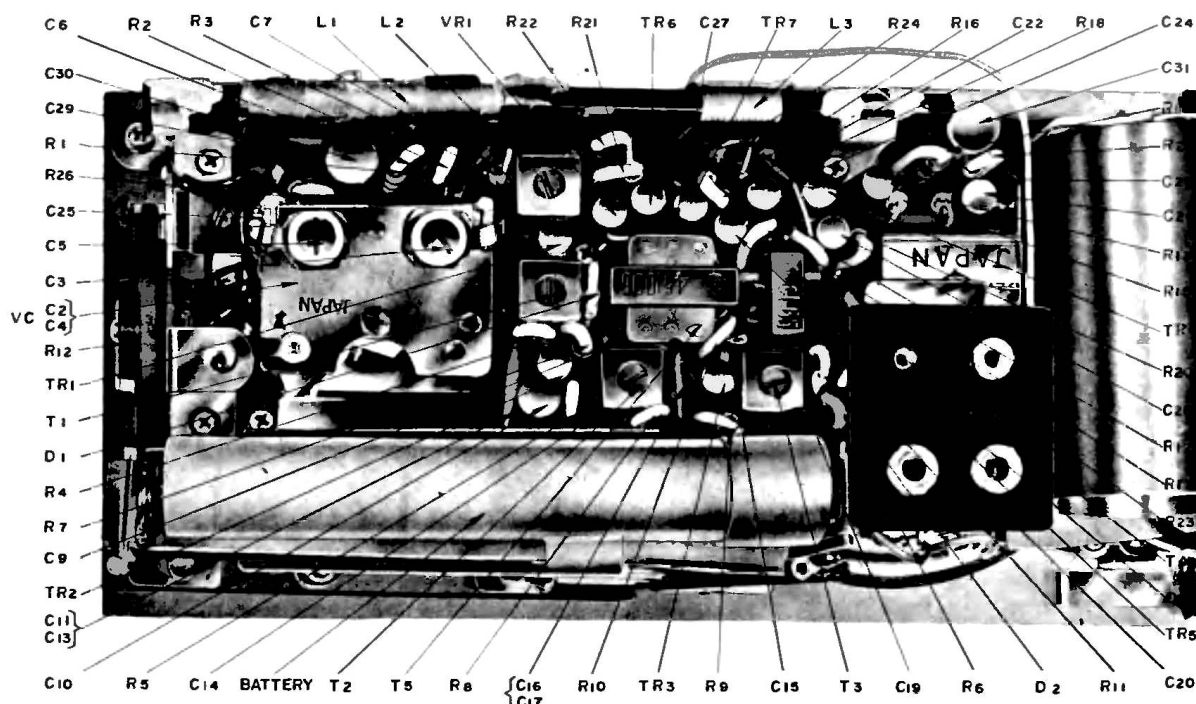

# Hitachi, Ltd.

## MODEL T-728

(Continued from page 62, at left)

