


Service
Service
Service


Service Manual




FM : 87.5 - 104 MHz
 SW : 5.95 - 15.45 MHz (50.4 - 19.4 m)
 MW : 520 - 1605 kHz (577 - 187 m)
 LW : 150 - 255 kHz (2000 - 1150 m)
 SUPPLY : 110/220V~
 : 6V (4xR14)

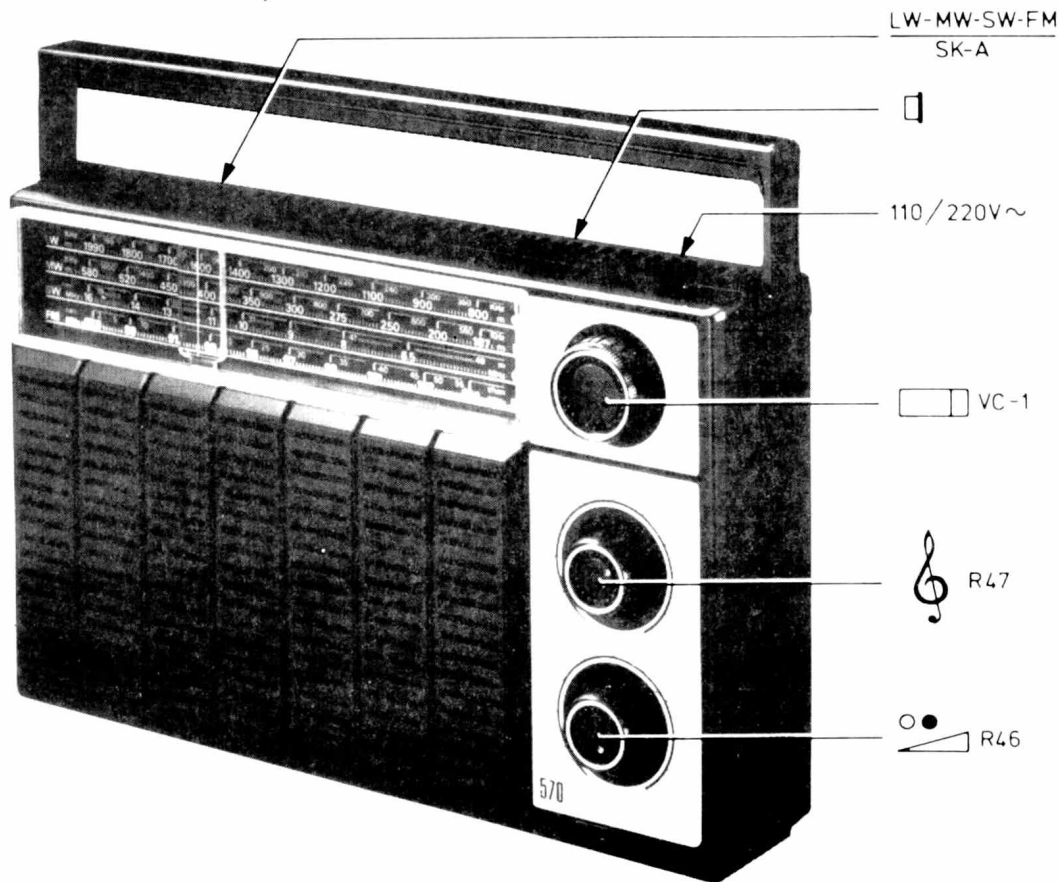





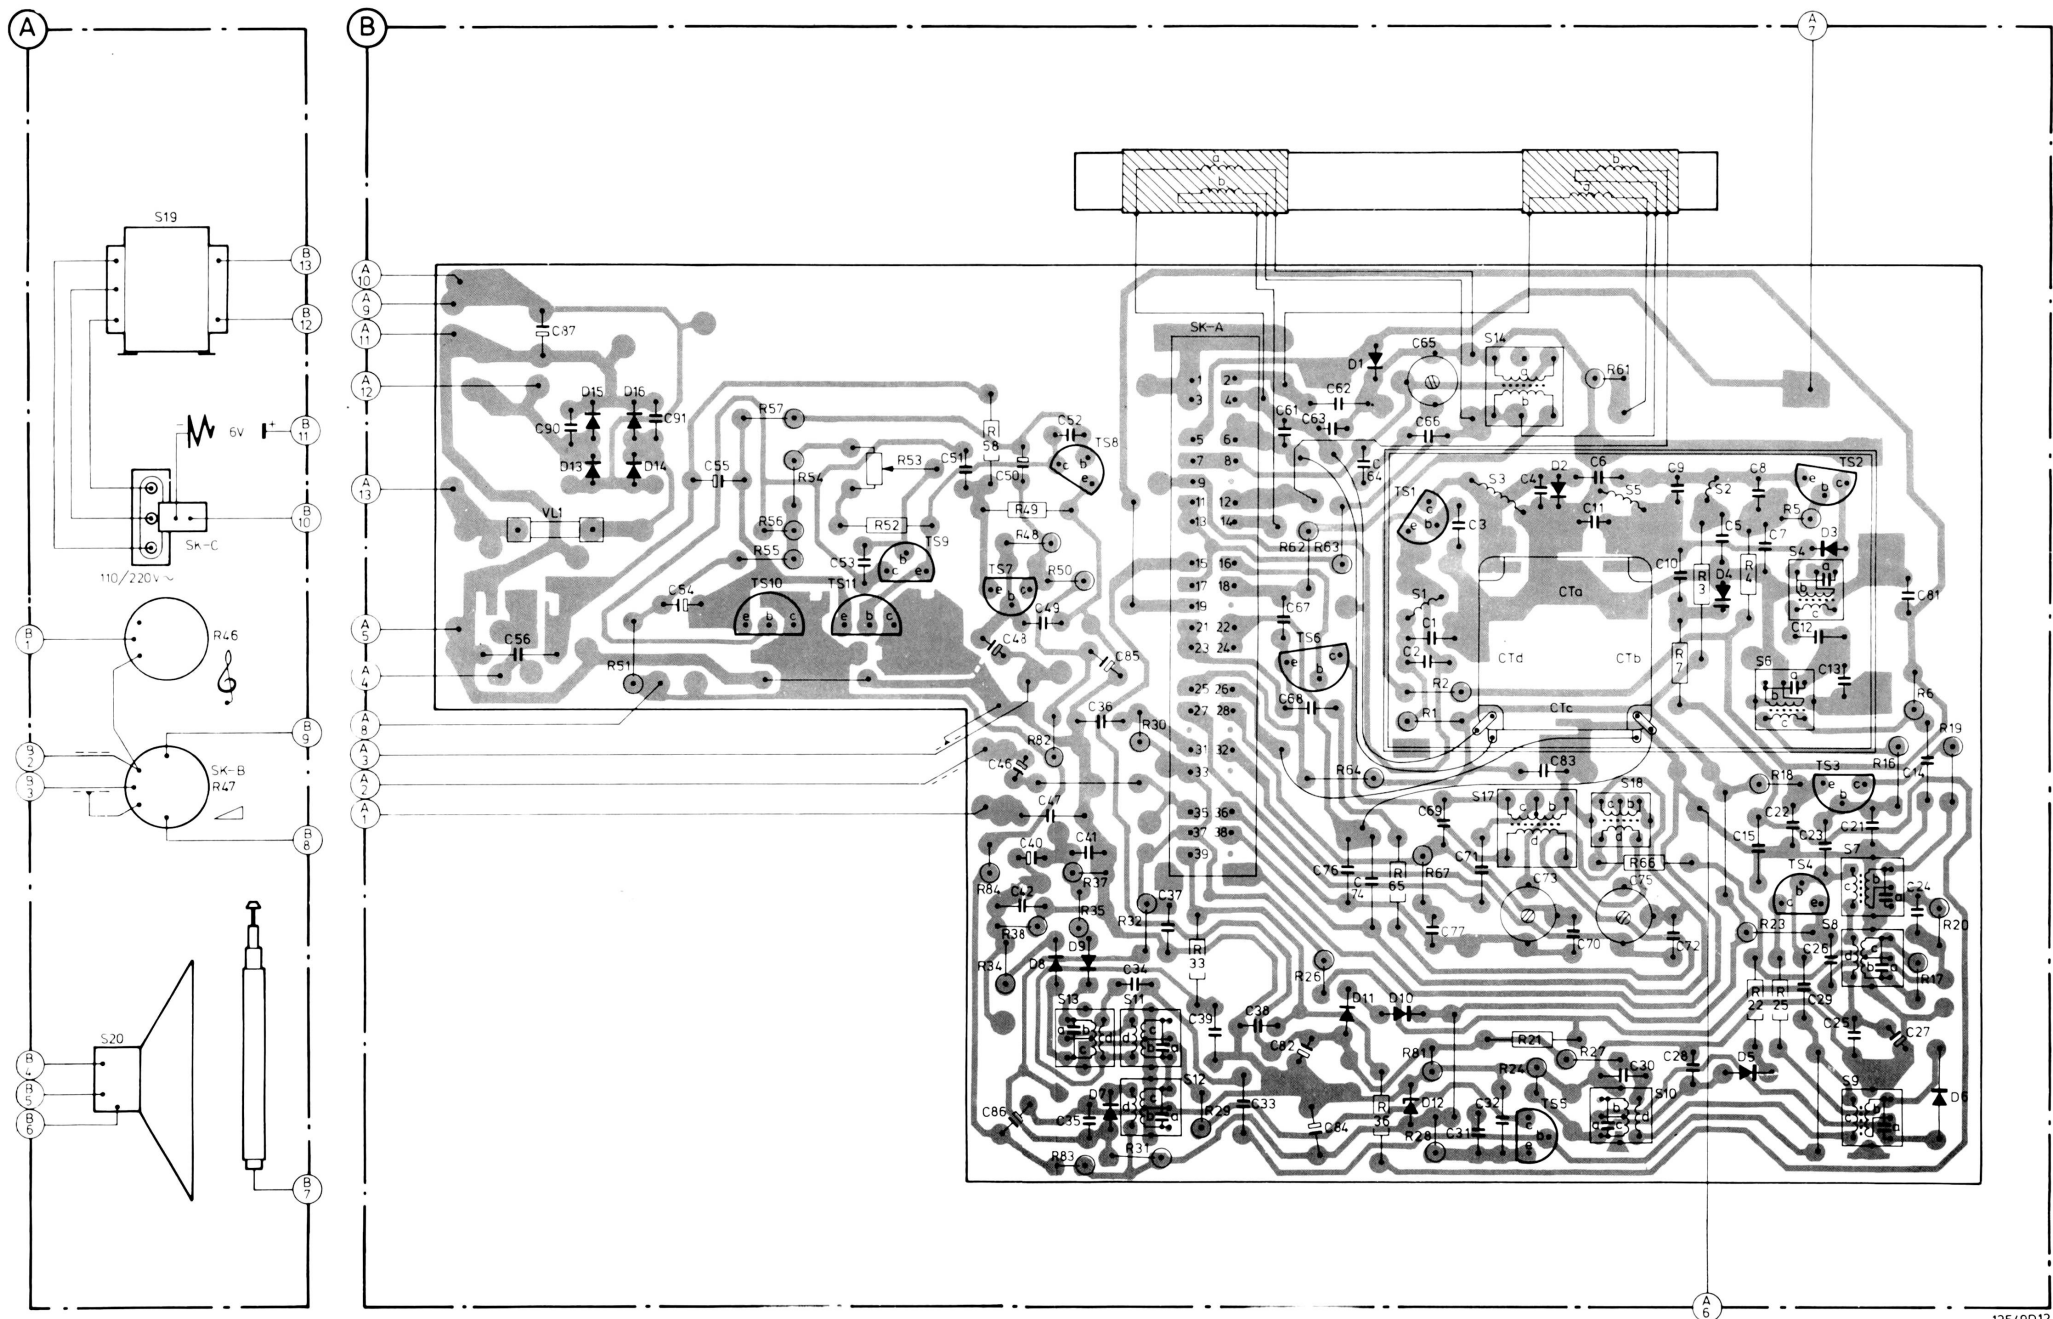



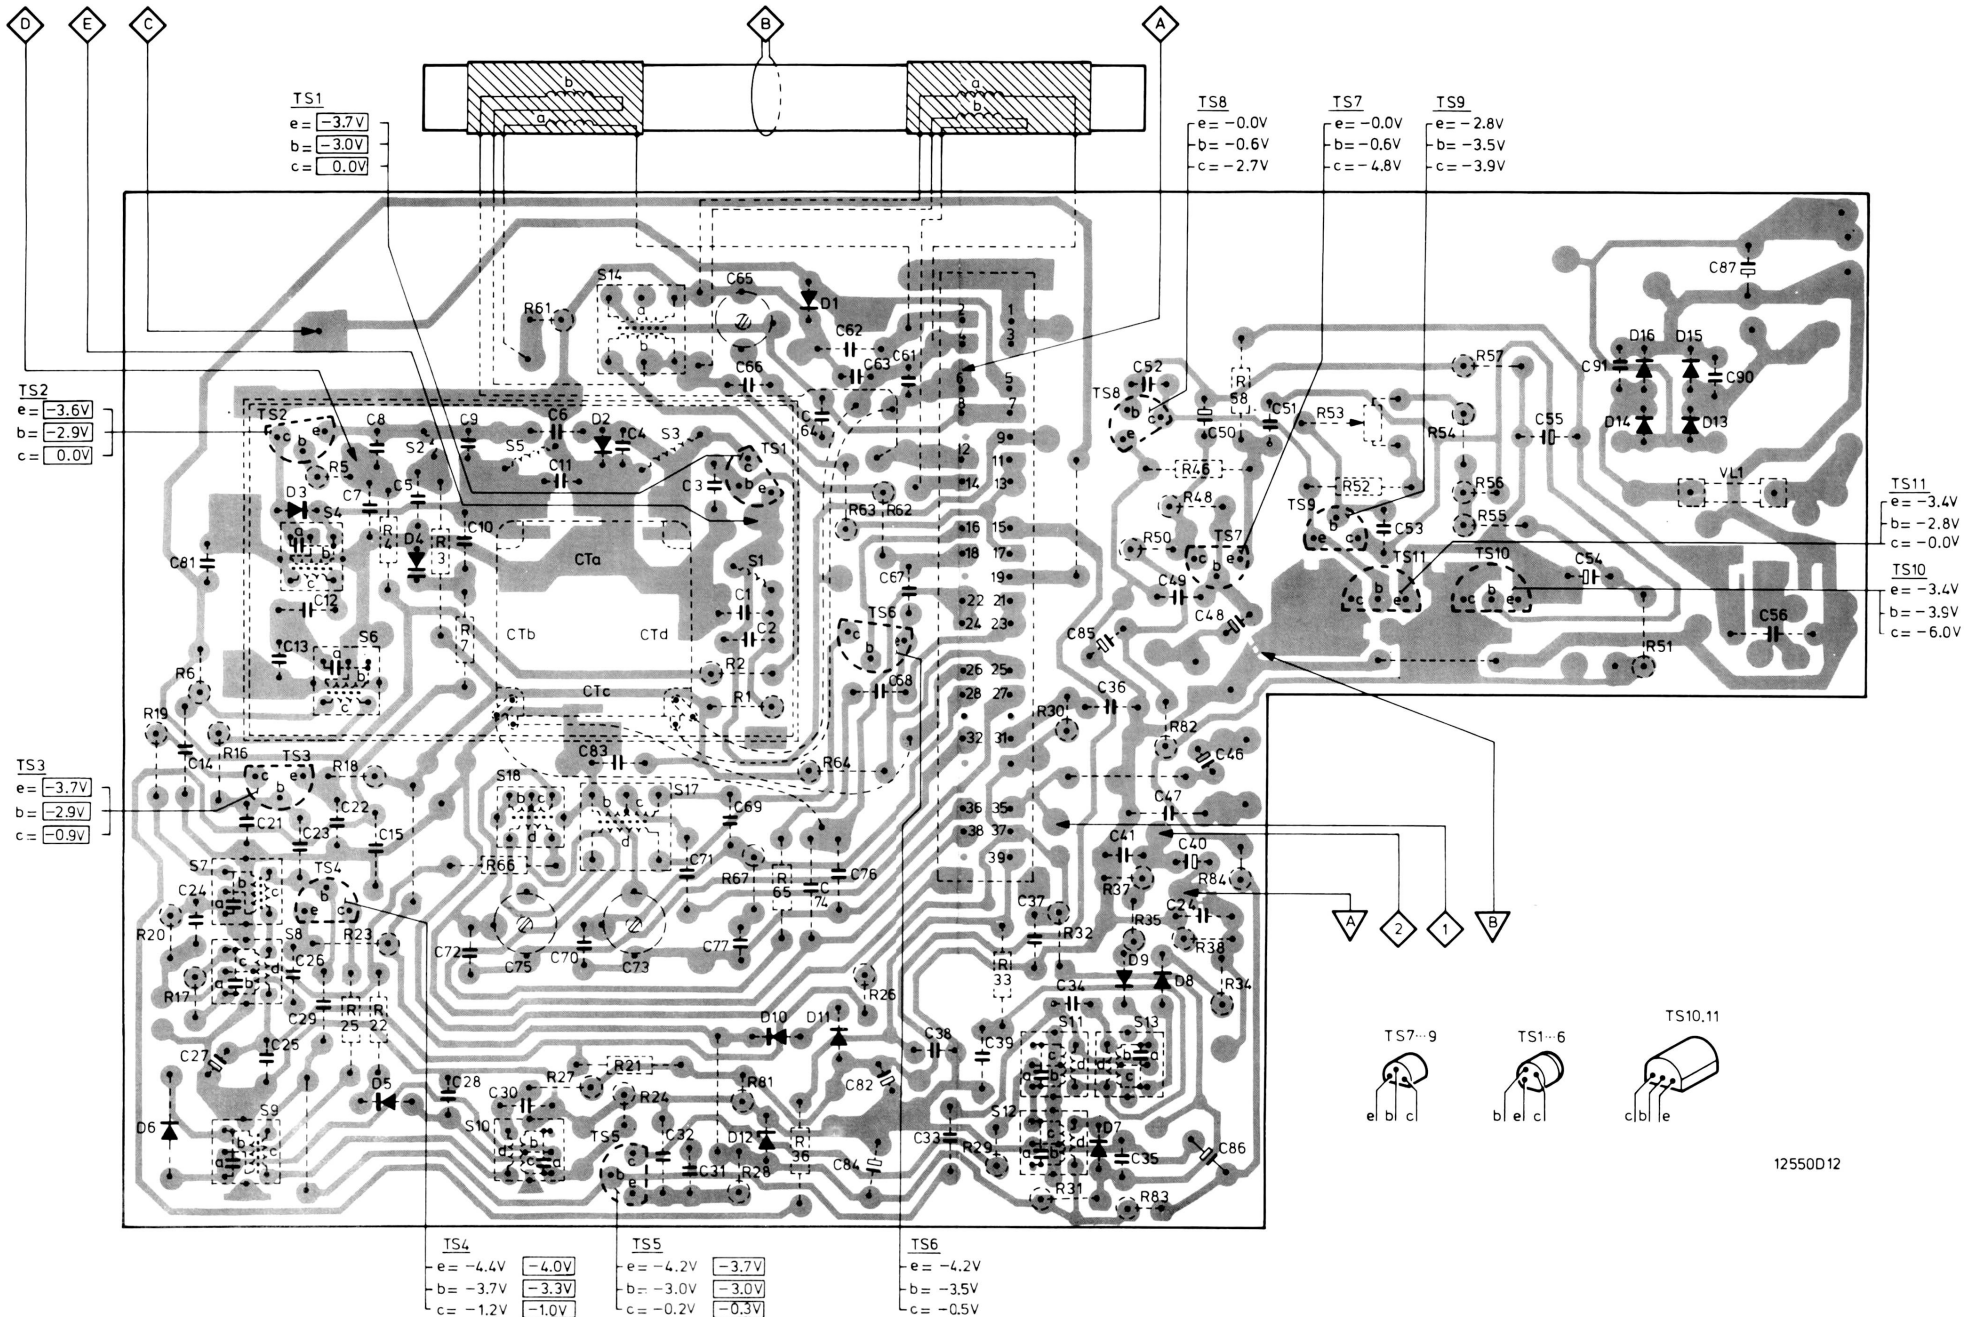










IF-AM : /00/28/40/51 452 kHz
 IF-AM : /15 470 kHz
 IF-FM : 10.7 MHz
 OUTPUT : 700 mW \pm 1 dB (d=10%) BATTERY
 : 1000 mW \pm 1 dB (d=10%) MAINS
 12725812

MISC.	SK-C SK-B	VL1	D13-D16	TS10	TS11	TS9	TS7	D8 D9	TS8 D7	SK-A	TS6	D1 D11 D10	D12 TS1	TS5 D2	D4 D5	D3 TS2	TS3 TS4	D6	MISC.
S	20 19							13	11 12 15			1	3 14 17	16 18	10 5	2	6	4 7 8 9	S
C	1 50						50 48 46 49 40	47 42 41 35 36 34 37 39	38 33			1 2	3 31 32 4 CTabcd	6 11 30 9 10 28 5 15	8 7	22 12 13 23 29 24 27 14	1 50	C	
	51 100		56 87 90	54 55	53	51	86 52 85		61 67 68 82 84 74 65 62 63 77	64 66 69 71 73 83 75	70 72					81	51 100		
R	1 50	46 47					49 48 34 50 35	38 37	29 33			26 36	2 1 28 24 27 21		7 3 4	23 18 22 25 5	16 6 17 19 20	1 50	R
	51 100			51		54 57	53 52	58	84 82 83		62 63 64	65 67 81		61 66				51 100	





MISC.	D6	TS4	TS3	TS2	D3	D5	D4	D2				TS5	TS1	D12	D10	D11	D1	TS6	D7				TS8	D9	D8	TS7	TS9	TS11	TS10	D13--D16				VL1	MISC.																
S				9	8	7	4	6		2		5	10	18	16	17	14	3	1			15	12	11	13								S																		
C	1--50	14	24	27	29	23	13	12	22	7	8	15	5	28	10	9	30	11	6	CTabcd	4	32	31	3	2	1		33	38	39	37	34	36	35	41	42	47	40	49	46	48	50	1--50								
	51--100		81											72	75	70	83	73	69	66	64	71	63	65	62	77	84	82	74	76	68	6	7	61		85	52	86		51		53		55	54		91	90	87	56	51--100
R	1--50	20	19	17	6	16	5	25	22	18	23	4	3	7							21	27	24	28		1	2		36	26				29	33	37	38	34	35	50	48	46				1--50					
	51--100																				66	61						81	67	65	64	63	62							83	82	84	58		52	53		54	57		51



Wave range	Signal to		Var. cap.	Detune	Adjust	Indication
SK-A						
MW (520-1605 kHz)	1 via 22 nF		Min. cap.	S8,10,12	S12	 max.
					S10	
					S8	
	512 kHz		Max. cap.		S18	
	1635 kHz		Min. cap.		CTc	
	600 kHz		Tune in		S15	
	1400 kHz				CTd	
LW (150-255 kHz)	147 kHz		Max. cap.		C75	 max.
	200 kHz		Tune in		S16	
SW (5.95-15.45 MHz)	5.8 MHz	 via 6 pF	Max. cap.		S17	 max. 
	15.9 MHz		Min. cap.		C73	
	6.5 MHz		Tune in		S14	
	14.5 MHz				C65	
FM (87.5-104 MHz)	10.7 MHz via 22 nF		Min. cap.	S4,6,7 9,11	11	 
					9	
					7	
					6	
					4	
					S13	 
	87.5 MHz	 via 39 pF	Max. cap.		S5	 max.
	104 MHz		Min. cap.		CTb	
	88 MHz		Tune in		S3	
	102 MHz				CTa	

Repeat - Herhalen - Répéter - Wiederholen - Repetera - Ricominciare - Repetera - Gentage - Gjentagelse - Toista

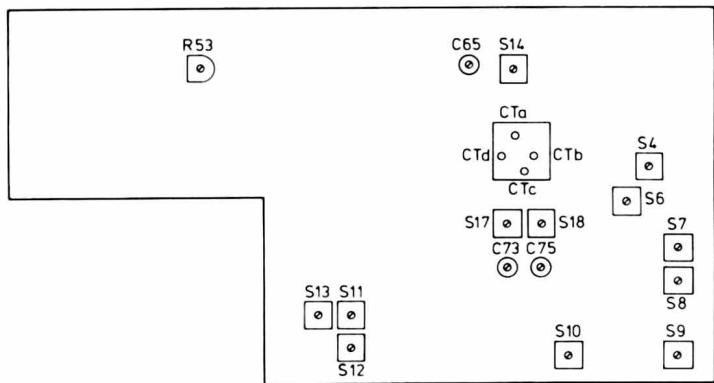

12728B12