


Marconi 435

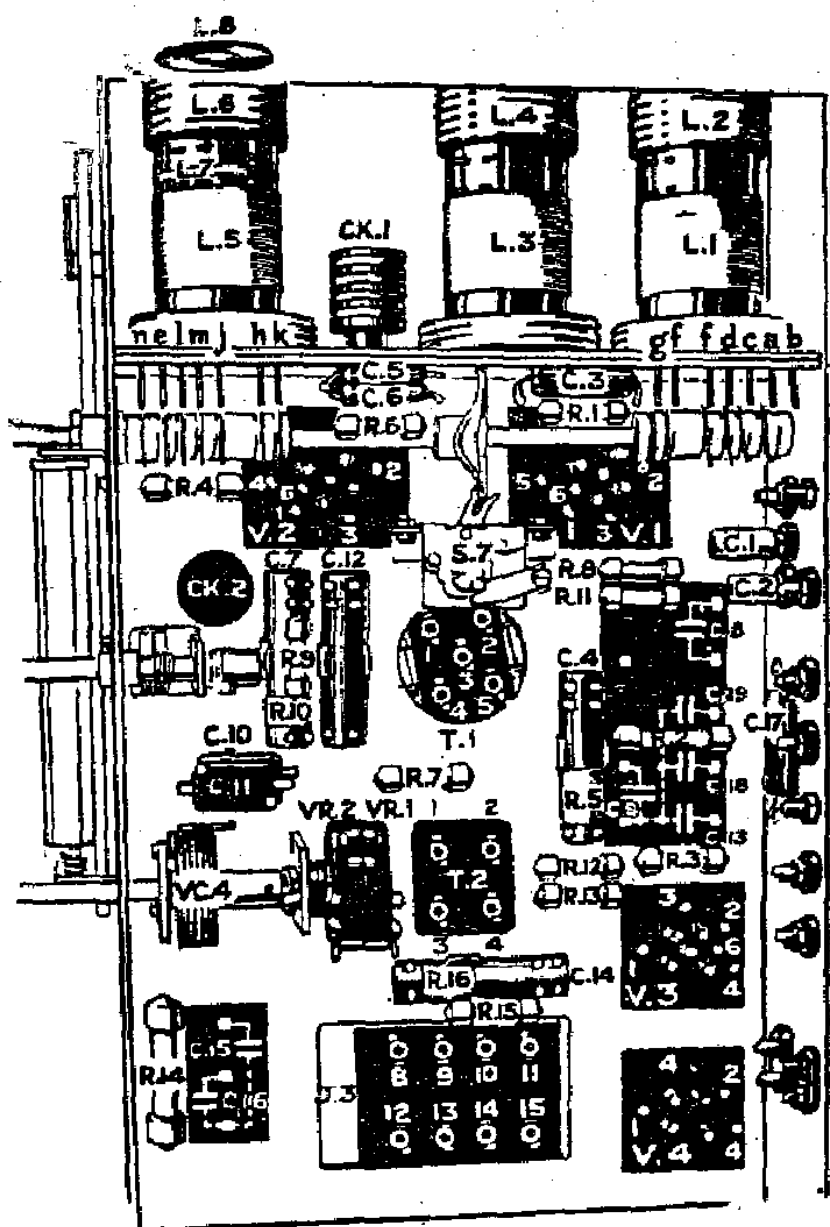

RADIO UNIT, complete

Securing screw
Strap
Shakeproof washer

Electrical Components of Unit.

Ref. No.	Description.
L1 and L2.	M.W. and L.W. tuning coil on base
L3 and L4.	M.W. and L.W. tuning coil on base
L5 and L6.	M.W. and L.W. tuning and reaction coils
L7 and L8.	M.W. and L.W. tuning and reaction coils
	Screw securing coil
	Coil cover
C 1.	Tabular Fixed condenser .0001 mfd.
C 2.	" " .00015 "
C 3.	" " .01 "
C 4 and R 5.	Decoupler unit. " " .1 + 400 ohm
C 5.	" " .0004 mfd.
C 6.	" " .0001 "
C 7 and R 10.	Decoupler unit. " " .1 + 1,000 ohm
C 8.	" " 1.0 mfd.
C 9.	" " 4.0 " }
C 10.	" " 4.0 " }
C 11.	" " 1.0 " }
C 12.	" " .5 " }
C 13.	" " .0005 " }
C 14.	" " .0005 " }
C 15.	In regulated tube. Fixed condenser .1 mfd.
C 14 and R 10.	Decoupler unit. " " .1 + 375 ohm
C 15.	Fixed condenser 4.0 mfd. }
C 16.	" " 4.0 " }
C 17.	" " .001 " }
VC1.	3-gang variable condenser
VC2.	" " "
VC3.	" " "
R 1.	Resistance 2,000 ohm
R 2.	" 50,000 "
R 3.	" 10,000 "
R 4.	" 2,000 "
R 5 and C 4.	Decoupler unit. Resistance 400 ohm + .1 mfd.
R 6.	" .5 megohm
R 7.	" 200,000 ohms
R 8.	" 35,000 "
R 9.	" 1 megohm
R 10 and C 7.	Decoupler unit. " " 1,000 ohm + .1 mfd.
R 11.	" 10,000 "
R 12.	" 5,000 "
R 13.	" 10,000 "
R 14.	" 1,000 "
R 15.	" 10,000 "