

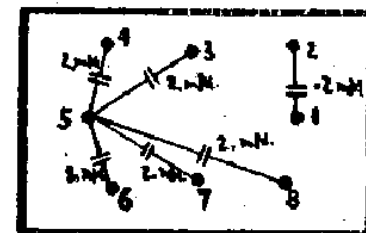


MARCONI RE39, RE57

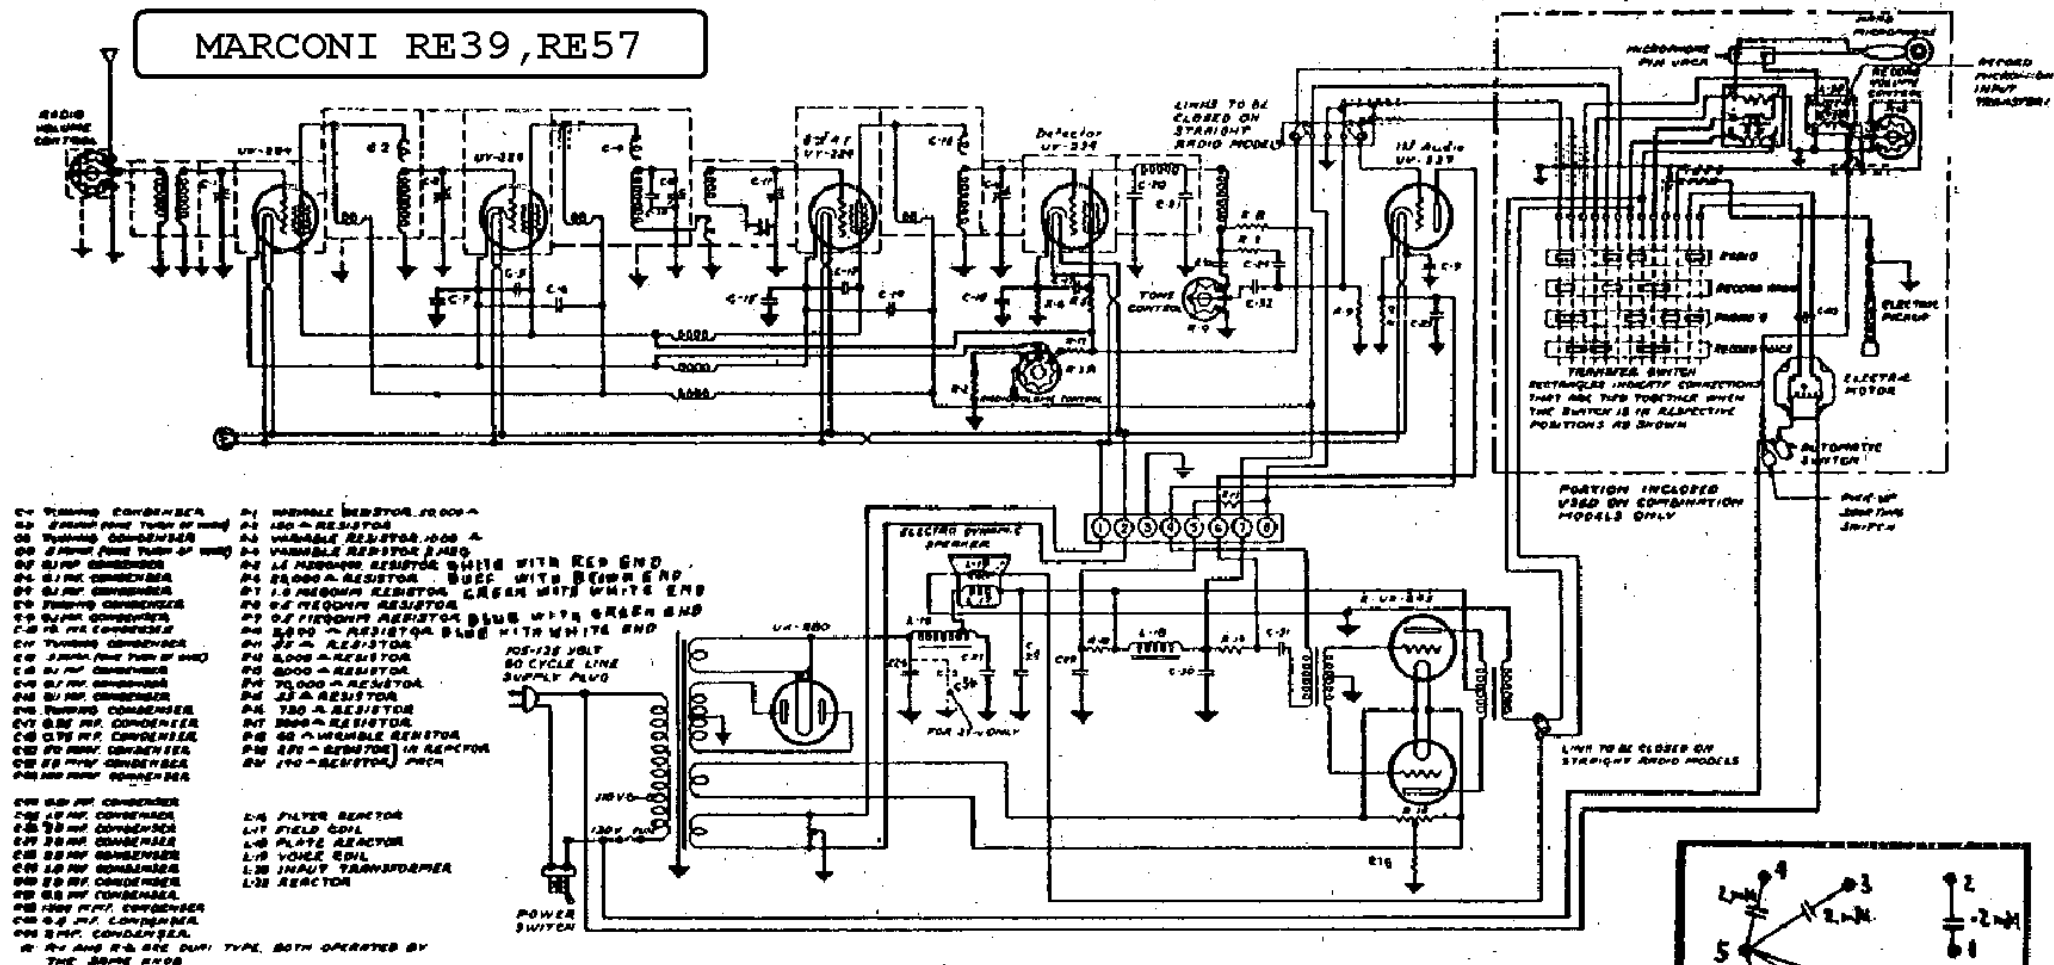

FILTER CONDENSER BANK.



MICROPHONE REACTOR - TERMINALS AND CONNECTIONS.

POWER TRANSFORMER COLOR CODE

Primary- Black-red tracer
 Primary tap- Black-red. 80/50
 Primary- Black
 280 filament-Brown-green tracer
 280 filament-Brown-green tracer
 245 filament-Brown-yellow tracer
 245 filament-Brown-yellow tracer

Plate winding-Black-blue tracer
 Plate midtap -Yellow-red tracer
 Plate winding-Black-blue tracer
 224-227 heaters-Brown
 224-227 heaters-Brown

INTERSTAGE AND OUTPUT TRANSFORMER COLOR CODES

Interstage transformer
 Primary start-Red-yellow 50/50
 Primary finish-Red-yellow tracer
 Secondary start-Green
 Secondary midtap-Yellow
 Secondary finish-Green

Output transformer
 Primary start-Blue
 Primary midtap-Red
 Primary finish-Blue
 Secondary start-Yellow
 Secondary finish-Black