


MURPHY - D26RG

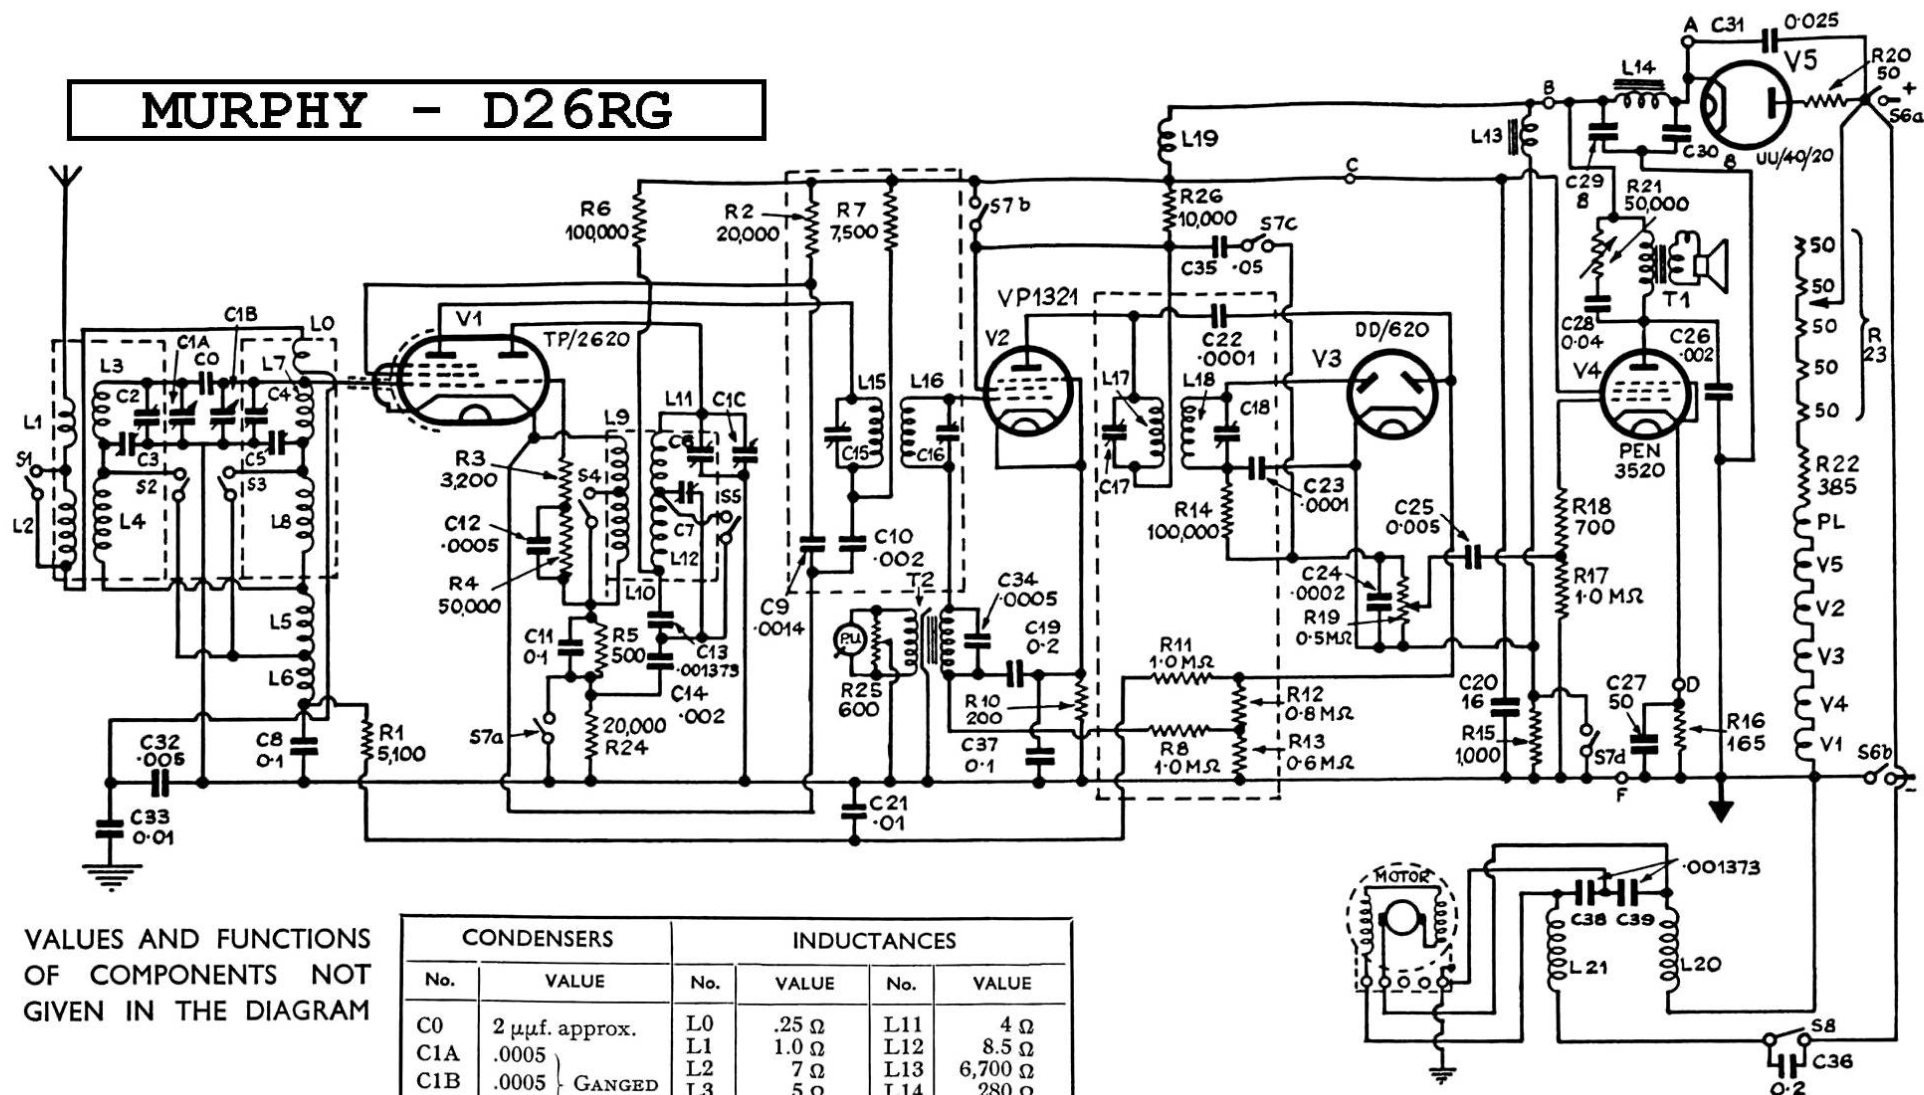

VALUES AND FUNCTIONS
OF COMPONENTS NOT
GIVEN IN THE DIAGRAM

CONDENSERS		INDUCTANCES			
No.	VALUE	No.	VALUE	No.	VALUE
C0	2 μ f. approx.	L0	.25 Ω	L11	4 Ω
C1A	.0005	L1	1.0 Ω	L12	8.5 Ω
C1B	.0005	L2	7 Ω	L13	6,700 Ω
C1C	.0005	L3	5 Ω	L14	280 Ω
C2	10/50 μ f.	L4	12 Ω	L15	40 Ω
C3	10/80 μ f.	L5	2.75 Ω	L16	40 Ω
C4	10/50 μ f.	L6	0.75 Ω	L17	40 Ω
C5	10/80 μ f.	L7	5 Ω	L18	40 Ω
C6	10/50 μ f.	L8	12 Ω	L19	837 Ω
C7	10/80 μ f.	L9	1 Ω	L20	38 Ω
C15	70/140 μ f.	L10	2.5 Ω	L21	38 Ω
C16	70/140 μ f.	TRANSFORMERS			
C17	70/140 μ f.	No.	Value		
C18	70/140 μ f.	T1	PRIM. 350 Ω		
			SEC. 0.25 Ω		
		T2	PRIM. 71 Ω		
			SEC. 1750 Ω		

D26RG THEORETICAL DIAGRAM