

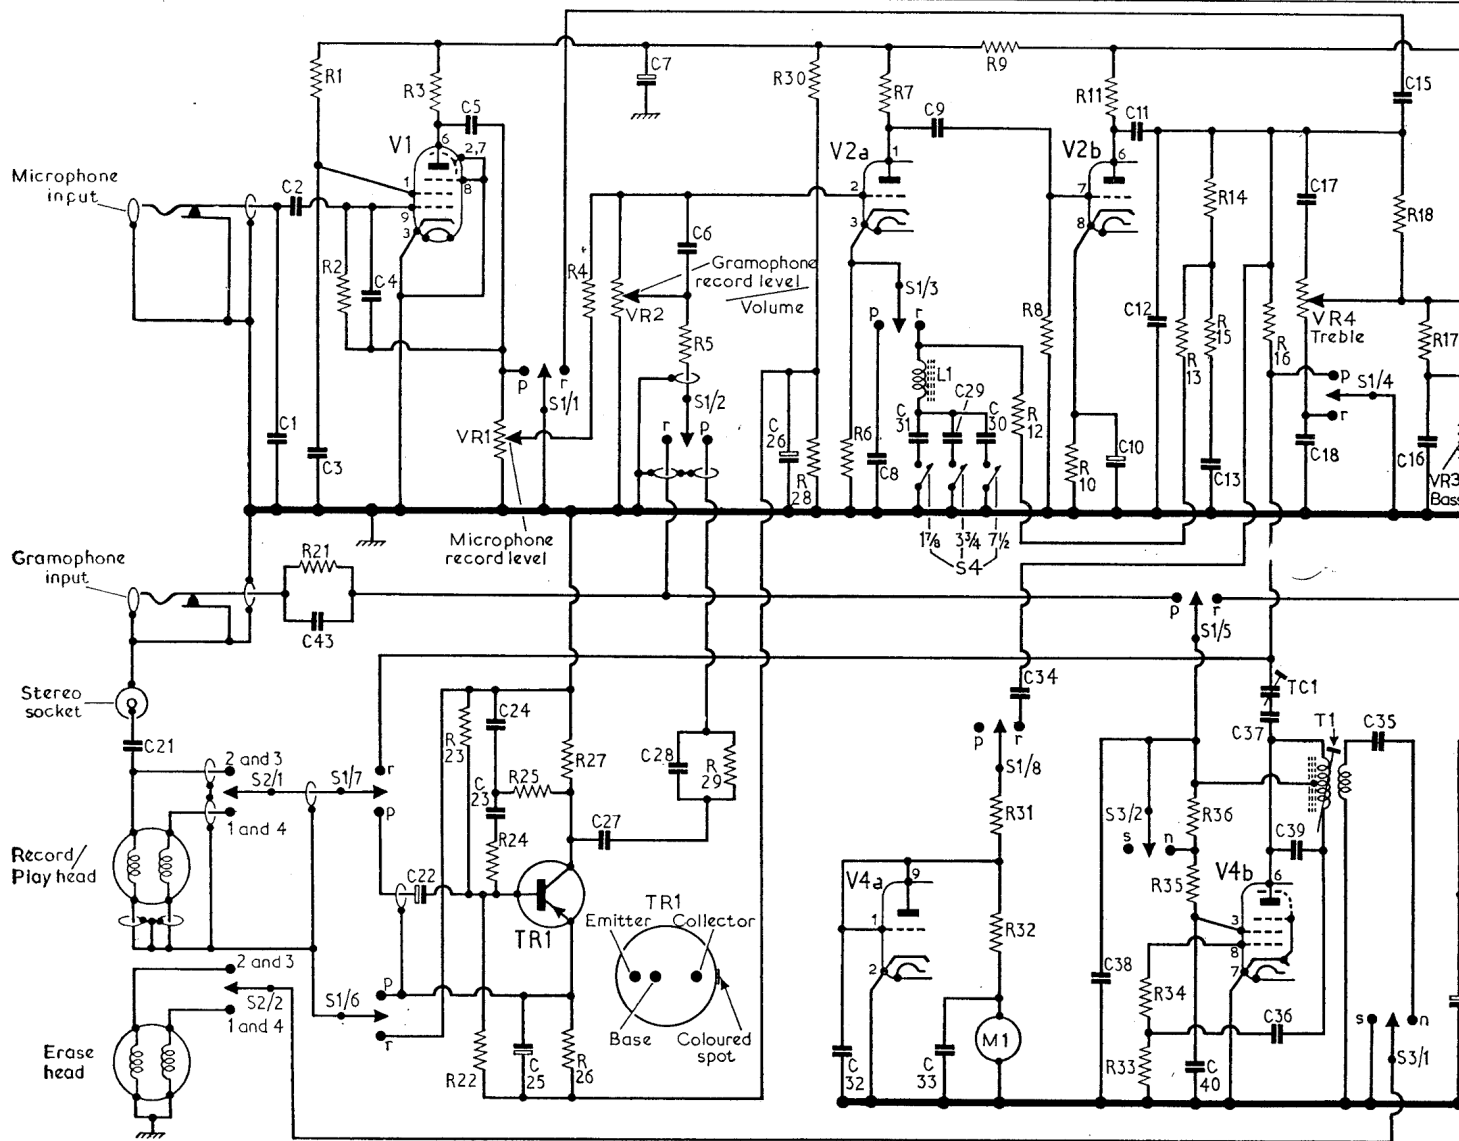


C	21	1, 2, 3, 4, 3	4	22	5	24, 23, 25	27	7	28, 6	26	32	8	31, 9	33, 29, 30, 34	38, 10, 11, 12	40, 13	TC1,	7, 18, 35, 15, 16	4
R		1, 21, 2		3	22, 23, 24, VR1, 25, 26, 27, 4, VR2	5	29		30, 28, 6	7			9, 31, 32, 12, 8	10	11	33, 34, 13, 35, 36, 14, 15, 16, VR4		18	17

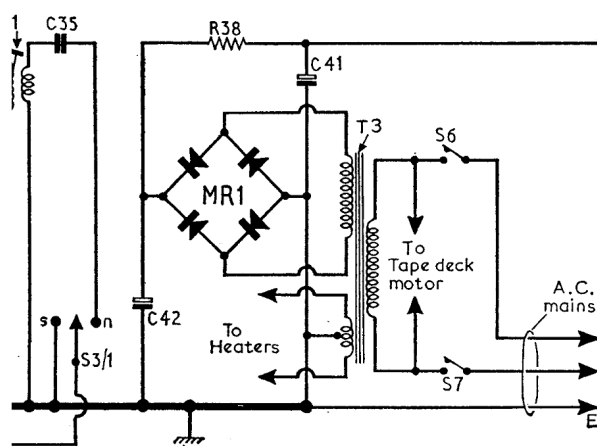

7,18,35,15,16	4	20,41,19	C
18 17 VR3	19,38	37,20	R

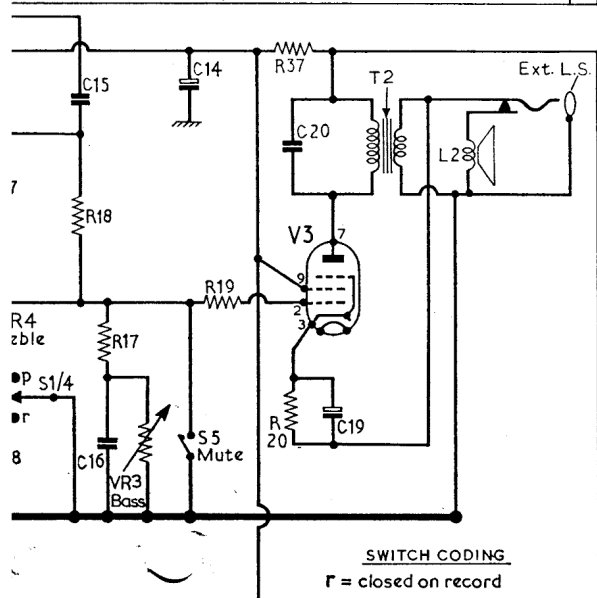

Resistors

R1	2MΩ	D2
R2	10MΩ	C2
R3	240kΩ	D3
R4	470kΩ	C3
R5	100kΩ	C2
R6	3.9kΩ	C2
R7	240kΩ	C2
R8	1MΩ	C2
R9	8.2kΩ	B2
R10	1.5kΩ	C2
R11	47kΩ	C2
R12	820kΩ	C1
R13	150kΩ	C1
R14	150kΩ	C1
R15	100kΩ	C1
R16	220kΩ	C1
R17	100kΩ	B2
R18	270kΩ	C1
R19	47kΩ	B1
R20	120kΩ	B1
R21	390kΩ	A2
R22	22kΩ	D1
R23	110kΩ	D1
R24	100kΩ	D1
R25	33kΩ	D1
R26	10kΩ	D1
R27	39kΩ	C1
R28	12kΩ	D2
R29	470kΩ	C1
R30	110kΩ	D2
R31	18kΩ	B1
R32	150kΩ	A1
R33	47kΩ	A2
R34	1kΩ	A2
R35	100kΩ	A2

Capacitors

C1	2,000pF	C2
C2	0.01μF	D2
C3	2,000pF	D2
C4	6.8pF	C2
C5	1,000pF	C2
C6	50pF	C2
C7	32μF	C2
C8	0.01μF	C1
C9	0.02μF	C2
C10	20μF	C2
C11	0.1μF	C1
C12	200pF	C2
C13	330pF	C2
C14	50μF	B2
C15	3,000pF	B2
C16	3,000pF	B2
C17	200pF	B1
C18	1,000pF	B3
C19	160μF	B1
C20	0.01μF	B2
C21	4,700pF	D2
C22	6.4μF	C1
C23	0.1μF	D1
C24	2,000pF	D1
C25	20μF	D1
C26	200μF	C2

C27	0.1μF	C1
C28	100pF	C1
C29	1,300pF	C2
C30	650pF	C1
C31	4,000pF	C1
C32	2,000pF	A1
C33	0.1μF	A1
C34	0.01μF	B1
C35	3,500pF	A2
C36	200pF	B2
C37	0.01μF	B1
C38	0.01μF	A2
C39	4,000pF	B2
C40	0.01μF	A1
C41	32μF	B2
C42	50μF	B2
C43	100pF	A2
TC1	110pF	B1

Coils and Transformers

L1	—	C1
L2	30Ω	—
T1	—	B2
T2	—	E4
T3	—	F5

Miscellaneous

M1	—	—
MR1	EC1	F4
S1	—	F6
S2	—	D2
S3	—	A3
S4	—	F5
S5	—	F4
S6, S7	—	B3

Valve and Transistor Table

Valve	Anode (V)	Screen (V)	Cathode (V)
V1 EF86	240§	35	—
V2a ECC83	250§	35	—
V2b ECC83	145	—	1.6
V2c ECC83	155	—	1.6
V3 EL84	205	—	1.7
V4a ECL86	215	—	1.7
V4b ECL86	275	265	6.5
	275	275	7.0
TR1 AC107	265	75¶	—

Emitter 18V, base 17.3V, collector 12.5V.

*Recorder switched to record.
†Recorder switched to play.
§Measured at the junction R1, R3, R9.
¶40V on superimpose.