
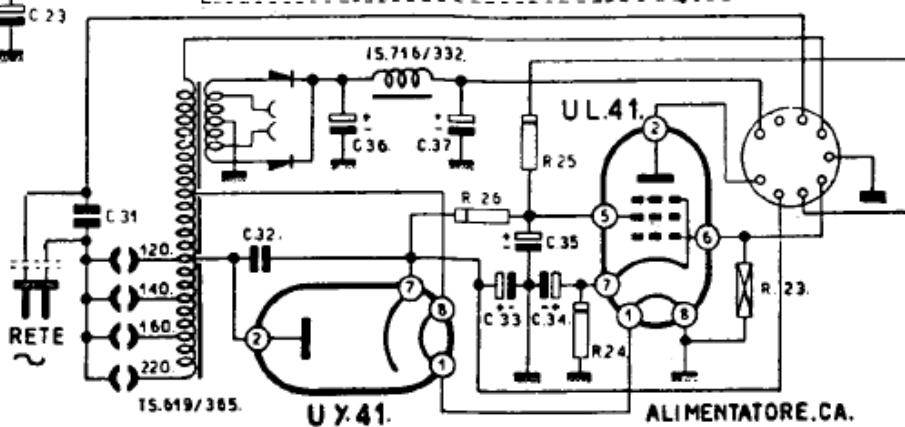
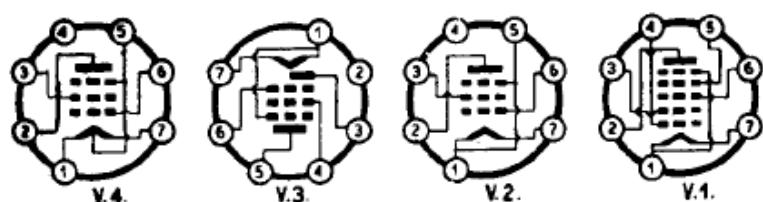


1. 2. 3. 4. 5. 6. 7. 8.
M.4. ○○○●○○○○
M.2. ○○●●○○○○
C. ●●●○○○○○
C.S. ●●●○○○○○

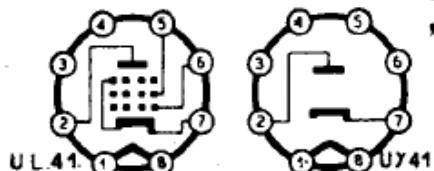

PHONOLA (S. A. FIMI) - Mod. 425. Apparecchio portatile, alimentabile anche con rete-luce a corrente alternata. Onde medie e onde corte divise in due semigamme. MF a 470 kc/s. Anodica 90 V, schermo 55 V, accensione 1,5 V. Potenza 0,23 W con pile; 1,1 W con rete-luce. Consumo 20 watt.

	3000 pf.	1500 VP	carta eg.
C 1	200 >	>	
C 2	100 >	>	
C 3	195 >	>	
C 4	15 >	>	
C 5	425 >	>	
C 6	50.000 >	1500 >	carta
C 7	50.000 >	>	
C 8	200 >	1000 >	ag.
C 9	200 >	>	
C 10	25.000 >	1500 >	carta
C 11	50.000 >	>	
C 12	200 >	1000 >	eg.
C 13	200 >	>	
C 14	200 >	>	
C 15	100 >	>	
C 16	100 >	>	carta
C 17	2000 >	1500 >	
C 18	50.000 >	>	carta
C 19	100 >	1000 >	eg.
C 20	2000 >	1500 >	carta
C 21	200 >	1500 >	ag.
C 22	1000 >	>	carta
C 23	40 uJ.	180 VL.	Elettr.
R 1	100 Ω	± 10	1/4
R 2	47 K Ω	>	1/2
R 3	22 K Ω	>	
R 4	22 K Ω	>	
R 5	2,2 M Ω	>	
R 6	47 K Ω	>	
R 7	3,3 M Ω	>	
R 8	0,47 M Ω	1/4	
R 9	10 M Ω	1/2	
R 10	3,3 M Ω	>	
R 11	1 M Ω	>	
R 12	470 Ω	>	
R 13	1 M Ω	1/4	
RV. 0,5 MΩ log. con interr.	R 5459/E		
Eventuale alimentazione CA.			
R 23	0,5 MΩ	± 10	1/4
R 24	140 Ω	± 5	1
R 25	1250 Ω	± 10	
R 26	1000 Ω	*	
C 31	3000 pf.	-10+25	3000 V
C 32	25.000 >	>	1500 V
C 33	32 uJ.	-10+70	180 V
C 34	2 >	>	25 VI
C 35	32 >	>	180 VI
C 36	2500 >	>	10 VI
C 37	2500 >	>	10 VI