

# **QUAD405**

## **POWER AMPLIFIER**

### **Service Data**

The Acoustical Manufacturing Co. Ltd  
St Peters Road, Huntingdon, Cambs, PE18 7DB, England  
*Telephone: 0480 52561 Telex 32348 QUAD G*

<b>Contents</b>	<i>page</i>
Circuit Description	3
Test Equipment	4
Disconnecting Clamp Circuits	4
Amplifier Circuit Testing	5
Clamp Circuit Testing	5
Fault Finding	6
Modifications	8
Clamp Circuit	9
Replacing a Clamp Board	9
Conversion of a 405 to a Mono 180 watt amplifier	10
Replacing Transformer	11
Replacing Amplifier Modules	11
<b>QUAD 405-2</b>	12
Assembly Diagram	opp. 12
Amplifier Board Layout Diagram M12368 ISS 9 and 10	rev. 15, 16
Amplifier Board Layout Diagram M12565 ISS 3	rev. 17
Circuit Diagram 2 amplifier boards M12368 ISS 5 and 6	13
Circuit Diagram 3 amplifier board M12368 ISS 7	14
Circuit Diagram 4 amplifier board M12368 ISS 9	15
Circuit Diagram 5 amplifier board M12368 ISS 9 and 10	16
Circuit Diagram 6 amplifier board M12565 ISS 3	17
Circuit Diagram 7 amplifier board M12565 ISS 5	18
Circuit Diagram 8 amplifier board M12565 ISS 6	19
Circuit Diagram 9 amplifier board M12565 ISS 7	20
Circuit Diagram 10 amplifier board M12565 ISS 7	21

## CIRCUIT DESCRIPTION


The Quad 405 is a two channel power amplifier primarily intended for use in high quality sound reproducing systems. The amplifier is usually used with Quad control units though other signal sources can readily be accommodated.

The amplifier uses a current dumping output circuit, a Quad invention which eliminates many of the problems associated with transistor amplifiers, and covered by patents in several countries.

In a current dumping amplifier there is in effect both a low powered very high quality amplifier and a high powered heavy duty amplifier. The low power amplifier controls the loudspeakers at all times, calling upon the high power section to provide most of the muscle. The small amplifier is so arranged – it carries an error signal – that provided the larger power transistors (the dumpers) get within the target area of the required output current it will fill in the remainder accurately and completely. The reproduced quality is *solely* dependent on the small amplifier which because of its low power can be made very good indeed.

Problems of crossover, crossover distortion, quiescent current adjustment, thermal tracking, transistor matching, all disappear. There are no internal adjustments or alignments and the choice of power transistor types is less restrictive.

Fig. 1

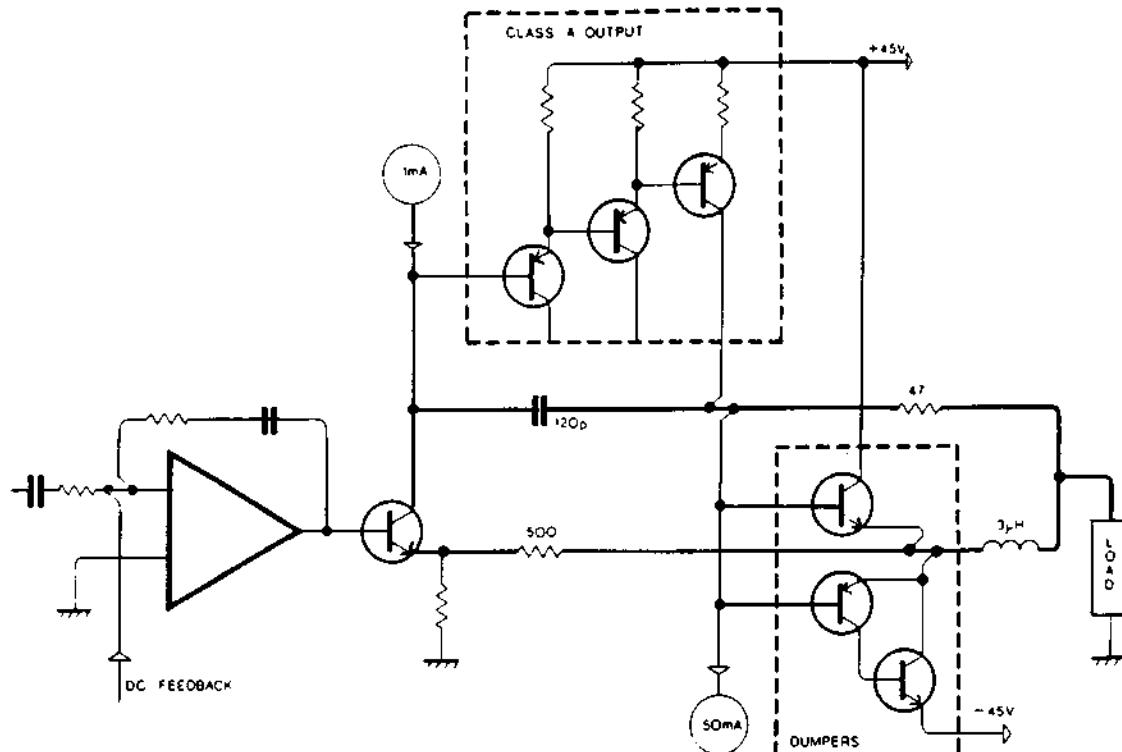

*Simplified Schematic of 405 Amplifier showing Class A, Dumpers and Bridge Components.*

## TEST EQUIPMENT

### Sound Technology Distortion Analyser 1700A (ST1700A)

Dual Beam Oscilloscope

4Ω and 8Ω loads of 100W Dissipation

1Ω load of 25W dissipation

2.5 KHz Square Wave Generator

Input Sensitivity Indicator (0 to 1V Rms)

Avometer (or similar multimeter)

0 to 12V d.c. power supply

Variac AC power supply

Fig. 2 illustrates a simple switching circuit which may assist if much testing is anticipated.

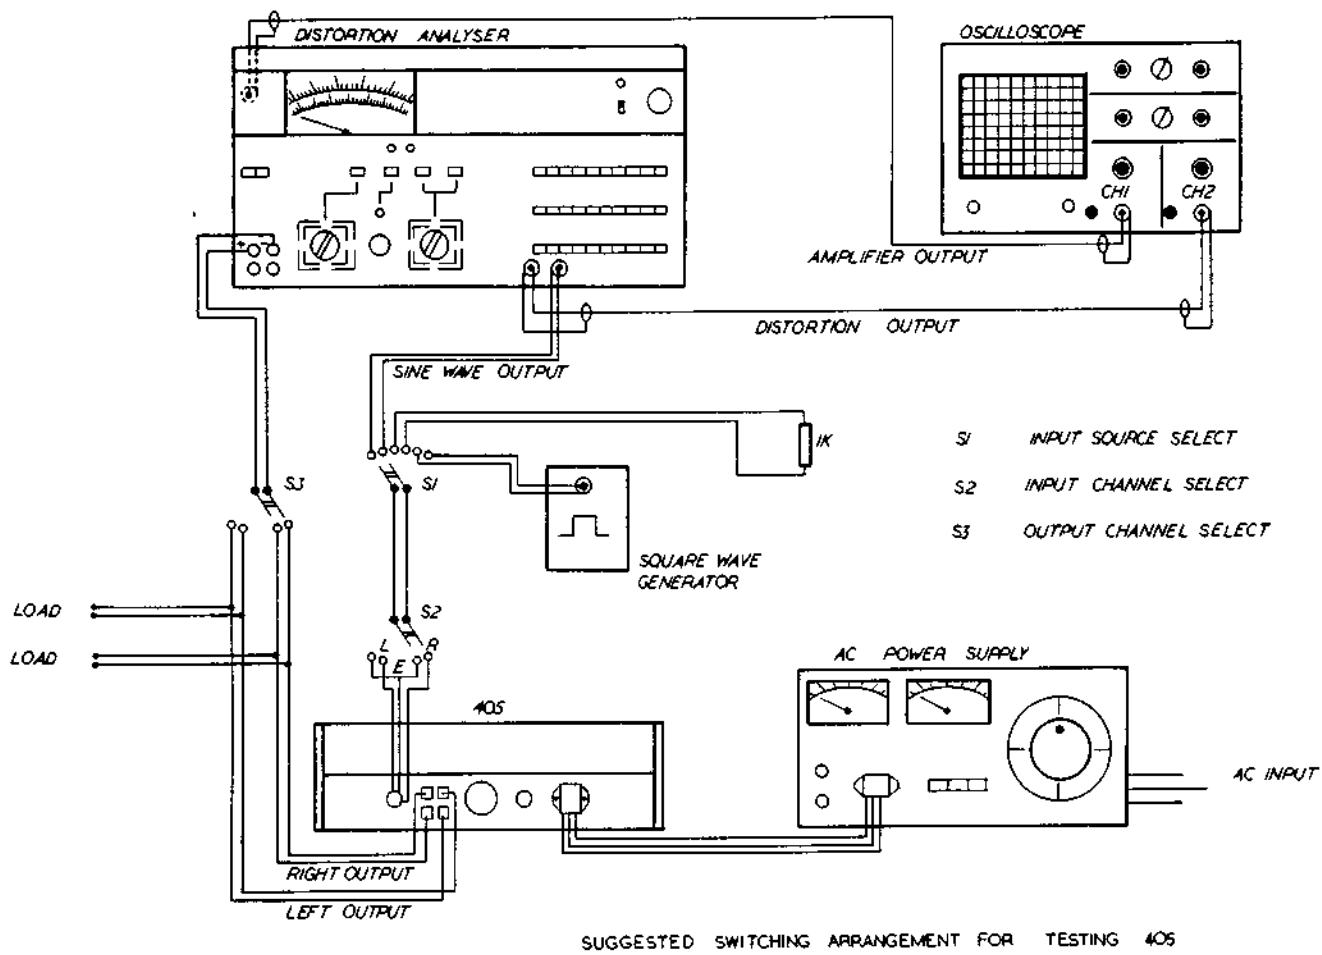


Fig. 2

Before testing, the cover of the 405 should be removed.

### DISCONNECTING CLAMP CIRCUITS

When servicing a 405 fitted with a clamp circuit, it may be necessary to bypass this circuit.

For 405's fitted with amplifier boards M12368, this may be done by removing the push-on connectors carrying the brown wires from the amplifier boards, and connecting the loads between the black output terminals and the output terminals on the amplifier boards.

For 405's fitted with amplifier boards type M12565, it will be necessary to remove the side panels to gain access to the printed copper side of the amplifier boards. The three screws securing each side panel should be removed, the panel may then be slid outwards from the amplifier. If the solder is removed from the link pad shown in Fig. 18 (A), the clamp circuit will be disconnected.

Care should be taken to ensure that when testing is completed, the link pad is re-soldered.

## AMPLIFIER CIRCUIT TESTING M12368 – M12565

The following test procedure is with reference to a 240V amplifier with no voltage limiters.

Select:

**Controls**      **Y1 – 0.5V/cm DC coupled**  
                 **Y2 – 0.1V/cm DC coupled**  
                 **Timebase 0.2 ms/cm**

**ST. 1700A –**    **Volts/power 100W RMS**  
**Distortion Ratio 0.01%**  
**80KHz and 400Hz filters both in**  
**Frequency 1KHz**  
**Low Distortion**  
**Osc. level minimum**

**Connections**    **Load 8Ω**  
**S1 Sine Wave (ST1700A)**  
**S2 Left Input**  
**S3 Left Output**

If the Amplifier fails any of the following tests, refer to the appropriate part of the fault finding section, page 6.

1. Check inside the amplifier for obvious faults such as burnt components, blown internal fuses etc.  
Each of the following checks should be repeated on the other channel.
2. Apply the **AC Supply Volts** whilst observing the current consumption which should not exceed 0.12A.
3. Increase the **oscillator level** to 0.5V Rms ± 0.5dB. The output should be 100W with no sign of clipping.
4. Select **set level** and adjust meter deflection for zero. Select **distortion** which should be less than 0.01%.  
Select **volts/power**, decrease the **applied frequency** to 100Hz, remove **400Hz filter** and adjust **timebase** to 50μs/cm. Select **distortion** which should again be less than 0.01%.
5. Select **volts/power**, increase **applied frequency** to 10KHz and adjust **timebase** to 20μs/cm. Adjust **oscillator level** so that output is 100W. **Set level** then select **distortion** which should be less than 0.05%.
6. Select **volts/power**, increase **applied frequency** to 20KHz and adjust **timebase** to 10μs/cm. Reduce **output level** to 80W. **Set level** and measure **distortion** which should be less than 0.1%.
7. Select **volts/power** and decrease **frequency** to 1KHz. Adjust **oscillator level** so that output is 100W and adjust **timebase** to 0.2ms/cm. The following checks are to monitor the low frequency roll off of the 405. Select **30Hz** and the output level should fall by approximately 0.3dB. Select **20Hz** and the output level should fall by approximately 1dB. Select **10Hz** and the output level should fall by 7dB ± 1.5dB.
8. Increase **frequency** to 1KHz. For 405's with amplifier boards type M12368 insert 1K8 voltage limitting resistors into the mini sockets on each amplifier board. For 405's with amplifier boards type M12565-3 insert a link into these sockets. The output waveform should indicate clipping. Reduce the **oscillator level** until the clipping just disappears at which point the output level should be 20V Rms ± 1V. Remove voltage limitters, and adjust **oscillator level** for 100W output.
9. Select **volts/power** and **square wave** input, (S1). Adjust **timebase** to 0.1ms/cm. Remove **load** and note the difference in the waveform with load and no load. There should be a slight difference in gain (10mV) but no overshoot. Re-connect 8Ω load.
10. The following checks should be carried out with no input signal and the input to the amplifier board loaded by a 1K resistor, (S1). Remove **400Hz filter** and select **noise** which should be better than -93dB unweighted.
11. Select **volts/power 400Hz filter** and **sine wave** input at a **frequency** of 1 KHz and adjust **oscillator level** for 100W output. Select **1Ω load**. The output should clip equally on both halves of the waveform as shown in Fig. 11.
12. Select **4Ω load**, output level should be 70W just prior to clipping.
13. **CLAMP CIRCUIT TESTING**

In order to test the clamp circuit, the circuit should first be disconnected from its amplifier board, as described on page 4.

For 405's fitted with amplifier boards M12368 apply **6V d.c.** across the output terminals of the relevant channel with an ammeter in circuit.

For 405's fitted with amplifier boards M12565 a wire should be soldered to the back of the amplifier board as shown in Fig. 18(B). 6V d.c. should be applied between this wire and the black output terminal of the relevant channel, with an ammeter in circuit.

In both cases the current should not exceed 0.5mA. Reverse the polarity of the supply and repeat the test. The test may then be carried out on the other channel.

The complete test should then be repeated using a 12V d.c. supply with a 10Ω resistor in series, when the current should be approximately 1A.

## FAULT FINDING

The following information may assist in locating faults occurring on the amplifier boards of a 405. In each case only the faulty channel of the 405 is driven, as in the test procedure. The input should be a sine wave of 0.5V Rms and the output should be applied to an 8Ω load unless otherwise stated. The numbers refer to the relevant test check.

\*Board type M12368 only \*\*Board type M12565 only.

Effect	Cause
1. R33 Burnt R37 Burnt* R41 Burnt* R39 Burnt R38 Burnt	Collector-base TR10 O/C L1 O/C L3 O/C R20 O/C, R21 O/C D5 or D6 O/C
2. High Current	TR2 O/C, TR3 O/C, TR7 O/C, TR9 S/C TR10 S/C, R7 O/C C8 S/C
*	C3 S/C
**  Draws high current which drops to 0.1A after approx 2 seconds	D2 O/C R8 O/C  R14 O/C
3. No increase in AC supply current for increase in signal Signal is unstable and clips 100W o/p for 0.3V input Waveform trace as in Fig. 3 Waveform trace as in Fig. 4 Approximately 4W output	R3 O/C, C1 O/C, R31 O/C R6 O/C R20 O/C, R21 O/C TR8 O/C, TR6 S/C, R36 O/C, R30 O/C, C10 S/C L2 O/C R16 O/C
4. Second Harmonic Distortion Second Harmonic Distortion especially at 100Hz and on O/C load. Third Harmonic Distortion especially at 100Hz Third Harmonic Distortion Hum and noise Hum* Waveform trace as in Fig. 5* Waveform trace as in Fig. 6* Waveform trace as in Fig. 7 Waveform trace as in Fig. 8* Waveform trace as in Fig. 9	IC1, TR1, TR2, TR3, TR4, R5, R6, R17, R18, R22, C1. C2, C7, C8  R5. L2, R3, R6, R16, R20, R21, C3. C5 O/C R37 O/C TR3 S/C R23 O/C, R5 O/C R33 S/C R8 O/C C5 S/C, R15 O/C, TR1 O/C
6. Distortion at 20KHz	D5 S/C, D6 S/C
8. Limitting resistor R11 has no effect	R10 S/C
9. Square Wave Trace as in Fig. 10	C6 O/C
10. Noise especially at 100Hz Noise with large Spikes Noise	R5 TR1 IC1, R12, R3, R4, TR2
11. Current limitting check with 1Ω load. Waveform trace as in Fig. 12 Waveform trace as in Fig. 13 Waveform trace as in Fig. 14 Waveform trace as in Fig. 8	R29 O/C, R28 S/C, R25 O/C D3 S/C, R27 O/C, R24 O/C, R26 S/C TR6 O/C C11 S/C, TR5 O/C
13. Draws high current with 6V D.C. supply	T2 S/C

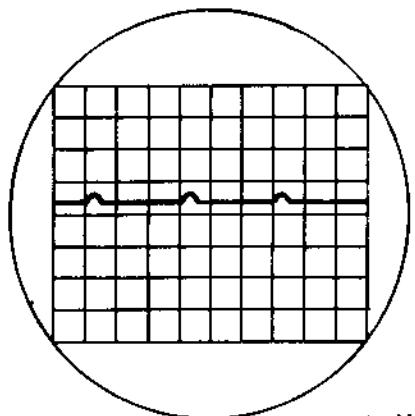


Fig. 3

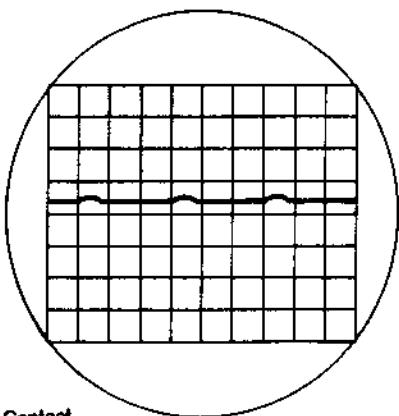


Fig. 4

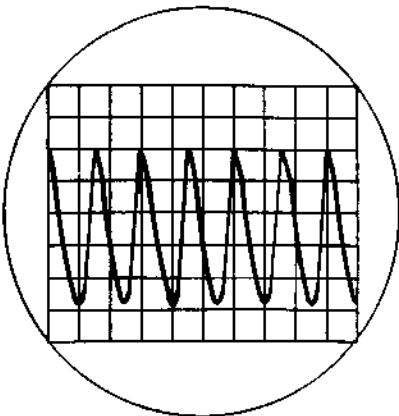


Fig. 5

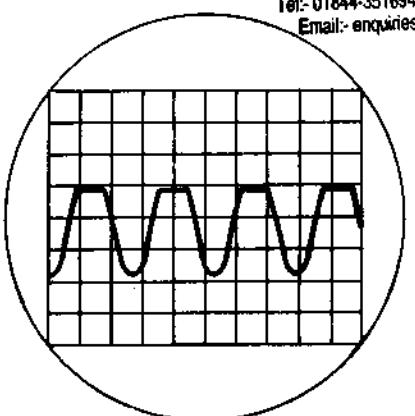


Fig. 6

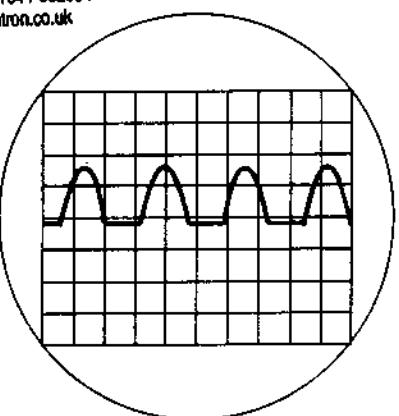


Fig. 7

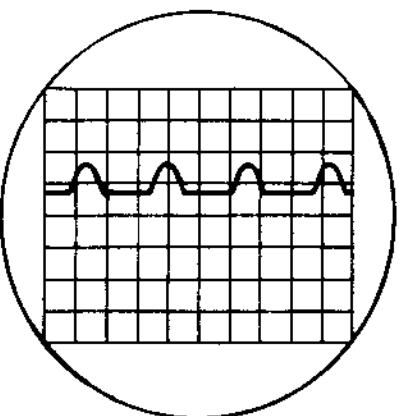


Fig. 8

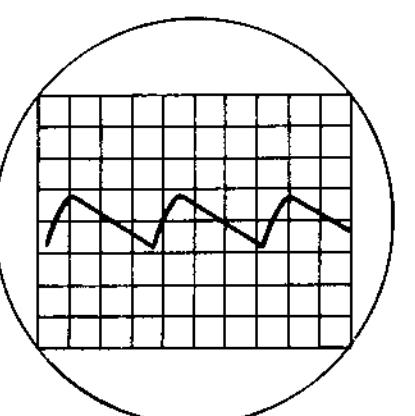


Fig. 9

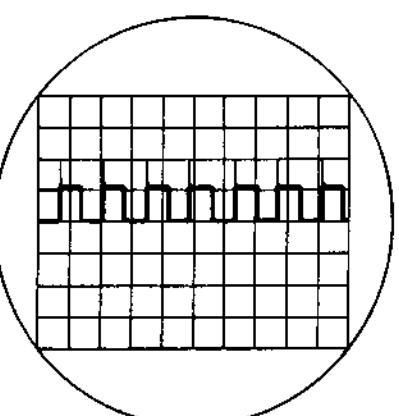


Fig. 10

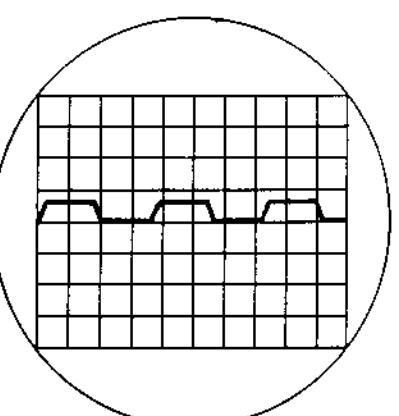


Fig. 11

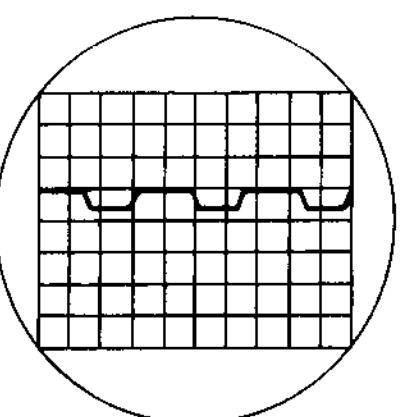


Fig. 12

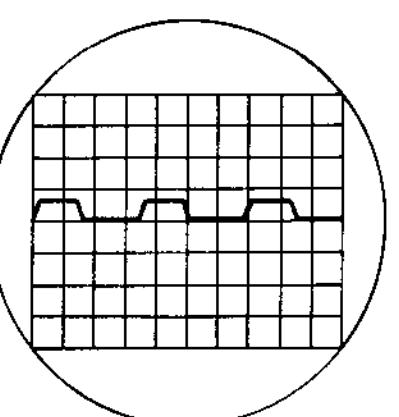


Fig. 13

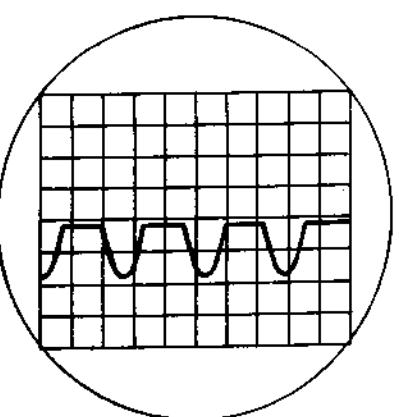


Fig. 14

For Service Manuals Contact  
MAURITRON TECHNICAL SERVICES  
8 Cherry Tree Rd, Chinnor  
Oxon OX9 4QY  
Tel:- 01844-351694 Fax:- 01844-352564  
Email:- [enquiries@mauritron.co.uk](mailto:enquiries@mauritron.co.uk)

## **MODIFICATIONS TO PRINTED CIRCUIT BOARDS.**

1. **Amplifier Board M12368.5** originally fitted. Circuit diagram issue 2.
1. **Amplifier Board M12368.6**  
Copper track layout modified component layout unchanged.
2. **Amplifier Board M12368.7** Circuit diagram issue 3.  
R4 changed from 10K to 22K  
R5 changed from 10K to 4K7  
R9 changed from  $180\Omega$  to  $220\Omega$   
R19 3K3 removed  
R23 changed from 3K3 to 1K2  
C9 330p removed  
C18 47nF added as on circuit diagram  
FS1 and FS2 effectively changed places  
R2 changed from  $2.2\Omega$  to  $10\Omega$   
Copper track width reduced.
- 3.(a) **Amplifier Board M12368.9** introduced at Serial Number 9000. Circuit diagram issue 4.  
R41 22Ω added  
L3 6.9μH added  
C15 0.1μH added  
C16 0.1μH added  
C18 47nF removed  
C19 1nF added  
Copper track width reduced.  
Also at Serial Number 9000 a clamp circuit, on PCB M12400, was mounted on the output terminals (fig. 15). This detects excessive DC off-set at the output and short-circuits, blowing the internal 4 amp fuses FS1/FS2, to protect the loudspeaker.
- 3.(b) At Serial Number 29,000 the following changes occurred. Circuit diagram issue 5  
R10 changed from 1K to 1K8  
R27 changed from 8K2 to 15K  
R29 changed from 8K2 to 15K  
R35 changed from  $0.08\Omega$  to  $0.091\Omega$   
R36 changed from  $0.08\Omega$  to  $0.091\Omega$   
D1 changed from LR120C to LR150C  
D2 changed from LR120C to LR150C
4. **Amplifier Board M12368.10**  
Identical to M12368.9 except for copper pads for power transistors modified for production purposes.
5. **Amplifier Board M12565.3** introduced at Serial Number 59,001. Circuit diagram issue 6. Other 405's with this board are Serial Numbers 57,301 to 57,600 inc.  
This board incorporates the clamp circuit and voltage limiter is now a link.
6. **Amplifier Board M12565.5**, circuit diagram issue 7, was also fitted from serial number 62500 onwards but with 405 nameplates. See 405.2, page 12.

### **Alternatives**

Transistors – on M12368 issues 5, 6 and 7 BDY77 or BDY74 may have been used for TR9 and TR10. BDY77 is a suitable replacement for both, but faster transistors may cause instability.

On M12368 issues 9 and 10 and M12565.3 the following transistors may have been used, 2SD424, 17556, 2SD676 and are interchangeable.

TR2 – BC682, ZTX304, BCX32, BC546B interchangeable

TR3, TR4 – E5458, ZTX504, BC556B interchangeable

TR7, TR8 – 40872 or 2SA740 interchangeable

### **L.E.D.**

LP1 Hewlett Packard 5082-4850, Exciton XC5053, Toshiba TLR114A interchangeable.

## CLAMP CIRCUIT

Introduced co-incident with amplifier board M12368.9 at serial number 9001. All 405's with serial numbers 9000 and under being returned for service, should be fitted with a clamp board as shown below.

At serial number 59,001 the clamp circuit was fitted as an integral part of the amplifier board M12565.3.

The function of this circuit is to monitor the D.C. component of the output. In the event of a component failure which causes excessive D.C. volts, the circuit will short circuit the amplifier output and thus protect the speakers.

## REPLACING A CLAMP BOARD

If it is necessary to replace a clamp board the following instructions should be followed:

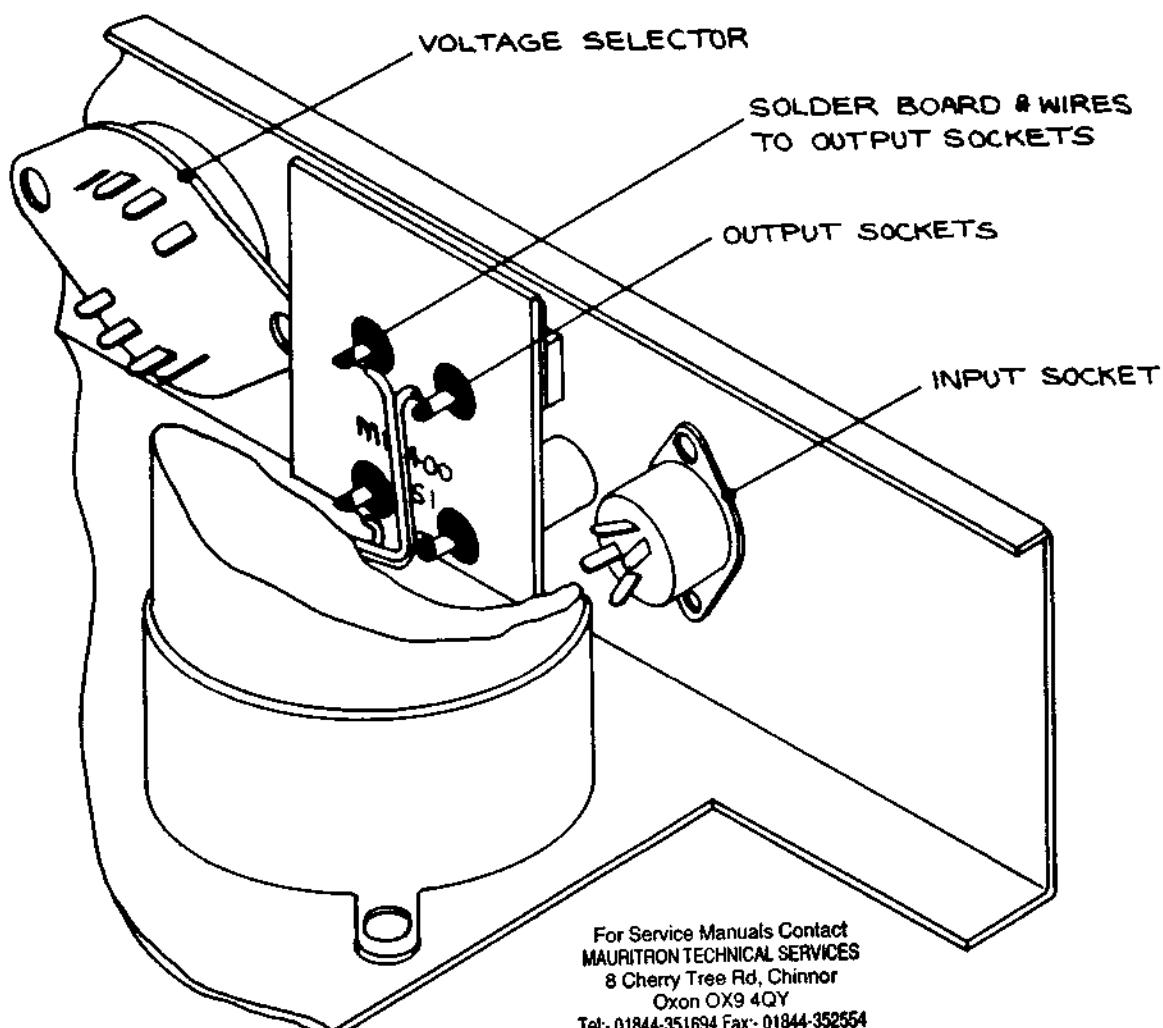


Fig. 15

1. Disconnect the wiring to the right channel circuit board and fold it back onto the transformer. Loosen the clamp holding the electrolytic capacitor next to the output terminals, and lift the capacitor out of the way.
2. Disconnect the leads to the output sockets, place the clamp board over the output connectors and re-solder. It is advisable to tin the output connector tags before positioning the clamp board. This makes soldering easier.
3. Replace the capacitor and re-connect the tags to the righthand amplifier board.

## CLAMP CIRCUIT ALTERNATIVES

T1 2N4992 or BS08A 03

T2 SC141B or TIC226B or RCA T2800.

## **CONVERSION OF 405 TO A MONO 180 WATT AMPLIFIER**

To carry out the conversion, the modification kit Q410MOD should first be obtained.

1. Remove 405 cover and baseplate.
2. Unplug the Amp connectors from the righthand channel printed circuit board (righthand side when viewed from the front).
3. Release the clip securing the rear 10,000 $\mu$ F capacitor (C14) and lay the capacitor over the righthand channel board.
4. Unsolder the four leads from the output terminals.  
For 405's fitted with amplifier boards M12368 (i.e. serial numbers 59000 and below) remove the clamp board.  
To disconnect the clamp circuit on 405's fitted with amplifier boards M12565 (i.e. serial numbers above 59000) remove both of the side panels. The solder should then be removed from the link pads shown as A in fig 18. The side panels should then be refitted.
5. Remove the output terminals and replace those for the righthand channel with the sockets provided, Red at the top. Fit the blanking grommets provided in the vacant holes.
6. Fit the new printed circuit clamp board to the output sockets and reconnect the output leads. Brown/Red to the pin marked R, Brown/White to the pin marked L and both Green leads to the pin next to L.
7. Remove the 4 pin Din input socket and unsolder the leads from it.
8. Connect these leads to the new input board, White to L and Red to R and screens to the two E tags.
9. Fit the new input socket and board.
10. Refit the 10,000 $\mu$ F capacitor and Amp connectors to the righthand board.
11. Remove the output leads, Brown/White from lefthand and Brown/Red from righthand printed boards.
12. Connect a 4-8 $\Omega$  speaker between the output tags of these two boards.
13. Switch on the amplifier, inject a signal of approximately 100mV at 1kHz at the input socket (left and right pins are now common). Remove the blanking grommet adjacent to the input socket and adjust the pre-set potentiometer through this hole for a null in the signal from the speaker, increasing the input signal level as required for final accurate setting.
14. Switch off, remove signal input, disconnect the loudspeaker, reconnect output leads, refit blanking grommet, base and cover.

## **REMOVING THE AMPLIFIER MODULES**

1. Note the colour coding for reconnection and remove the push-on tab connectors A.
2. Undo the four fixing screws B, for each module.
3. Remove the heatsink grease from the face of the aluminium T-section and retain for use when re-fitting.

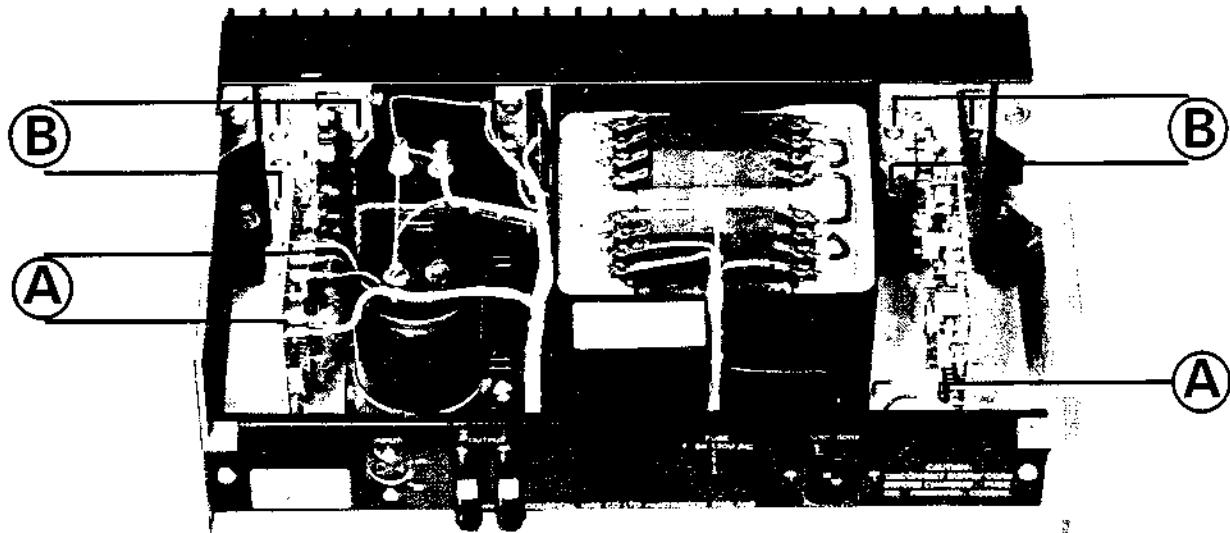


Fig. 16

## **REPLACING THE QUAD 405 TRANSFORMER**

1. Disconnect the A.C. supply and remove top cover (2 screws) and bottom plate (4 screws).
2. Note carefully the connections and then unsolder the external wiring to the A.C. supply transformer.
3. Remove the two retaining screws through the large centre holes of the 6 in each amplifier board mounting, and then release the boards by undoing the other 4 in each. These 12 screws fasten into tapped strips located in slots in the rear of the finned heat sink sections, which now become free of the front plate.
4. Release the transformer by undoing 4 screws through the front plate and 2 through the bottom.
5. Reverse the procedure with the new transformer.

**Note:** It should not be necessary to remove the push-on connections from the boards but if they are removed they should be handled carefully and replaced correctly.

## QUAD 405-2

The original 405 provided 100 watts per channel into load impedances between 4.5 and 8 ohms. To meet the need of 4 ohm loudspeakers and 8 ohm speakers whose impedance falls below 4.5 ohms, the 405-2 was introduced in January 1983 at serial number 65000, but the 405-2 modules had already been fitted from 62500 onwards. Many earlier amplifiers have also since been converted to 405-2 by owners and dealers, by replacing the modules.

The 405-2 has a more sophisticated current limiter circuit based on a thick film assembly N1/N2, permitting full output into loads between 3 and 10 ohms, and up to 50 watts into 1.5 ohms, provided the output transistors will not be hazarded by doing so. (See Fig. 17). As with earlier 405 models after serial number 59001, the output clamp circuit is incorporated in the main module boards and a shorting link used for the voltage limiter.

The first 405-2 circuit diagram was 12333 issue 7 and the printed board reference M12565.5.

Subsequent modifications were:

Date	Serial No.	PCB 12565 issue	Circuit Diagram 12333 issue	Changes
May 83	66700	6	8	C20 (4n7) added to avoid mild instability when switching off. D13 added in series with D5 to correct response at 20kHz. R44 added to maintain unconditional stability.
July 83	67950	6	8	Output terminals replaced by 4mm sockets.
Aug 84	72501	7	9	TR4 changed to BC556B and R18 omitted replacing both TR3 and TR4.
Dec 85	83000	7	-	Voltage selector omitted.
Feb 86	85000	7	10	New mains input connector incorporating fuse-holder. Din input replaced by phono sockets. Signal earth isolated from chassis by R2 to avoid hum loop when using mains earth.


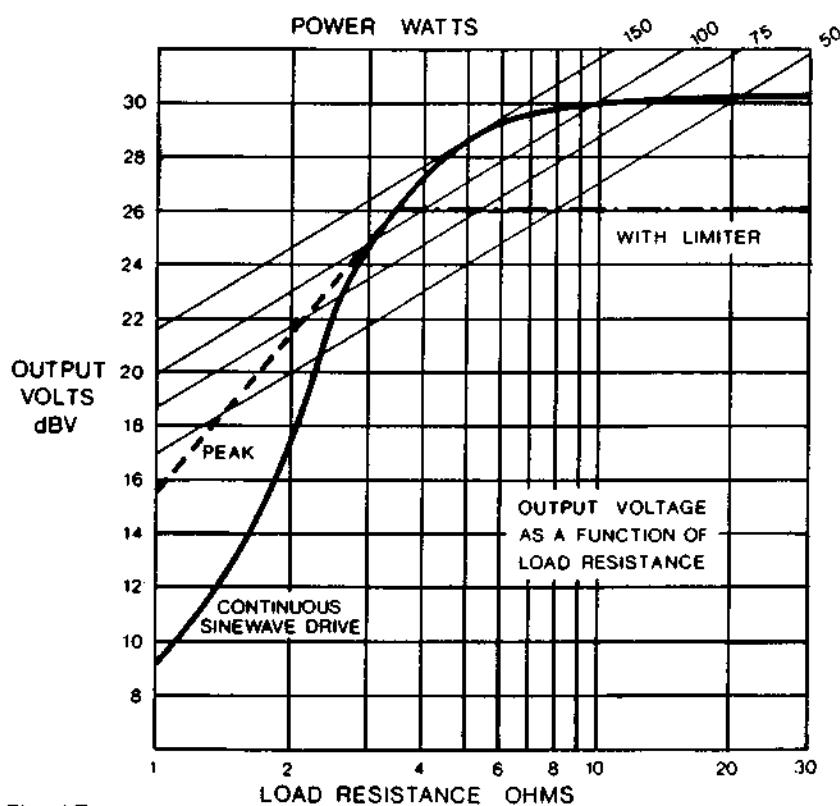


Fig. 17.

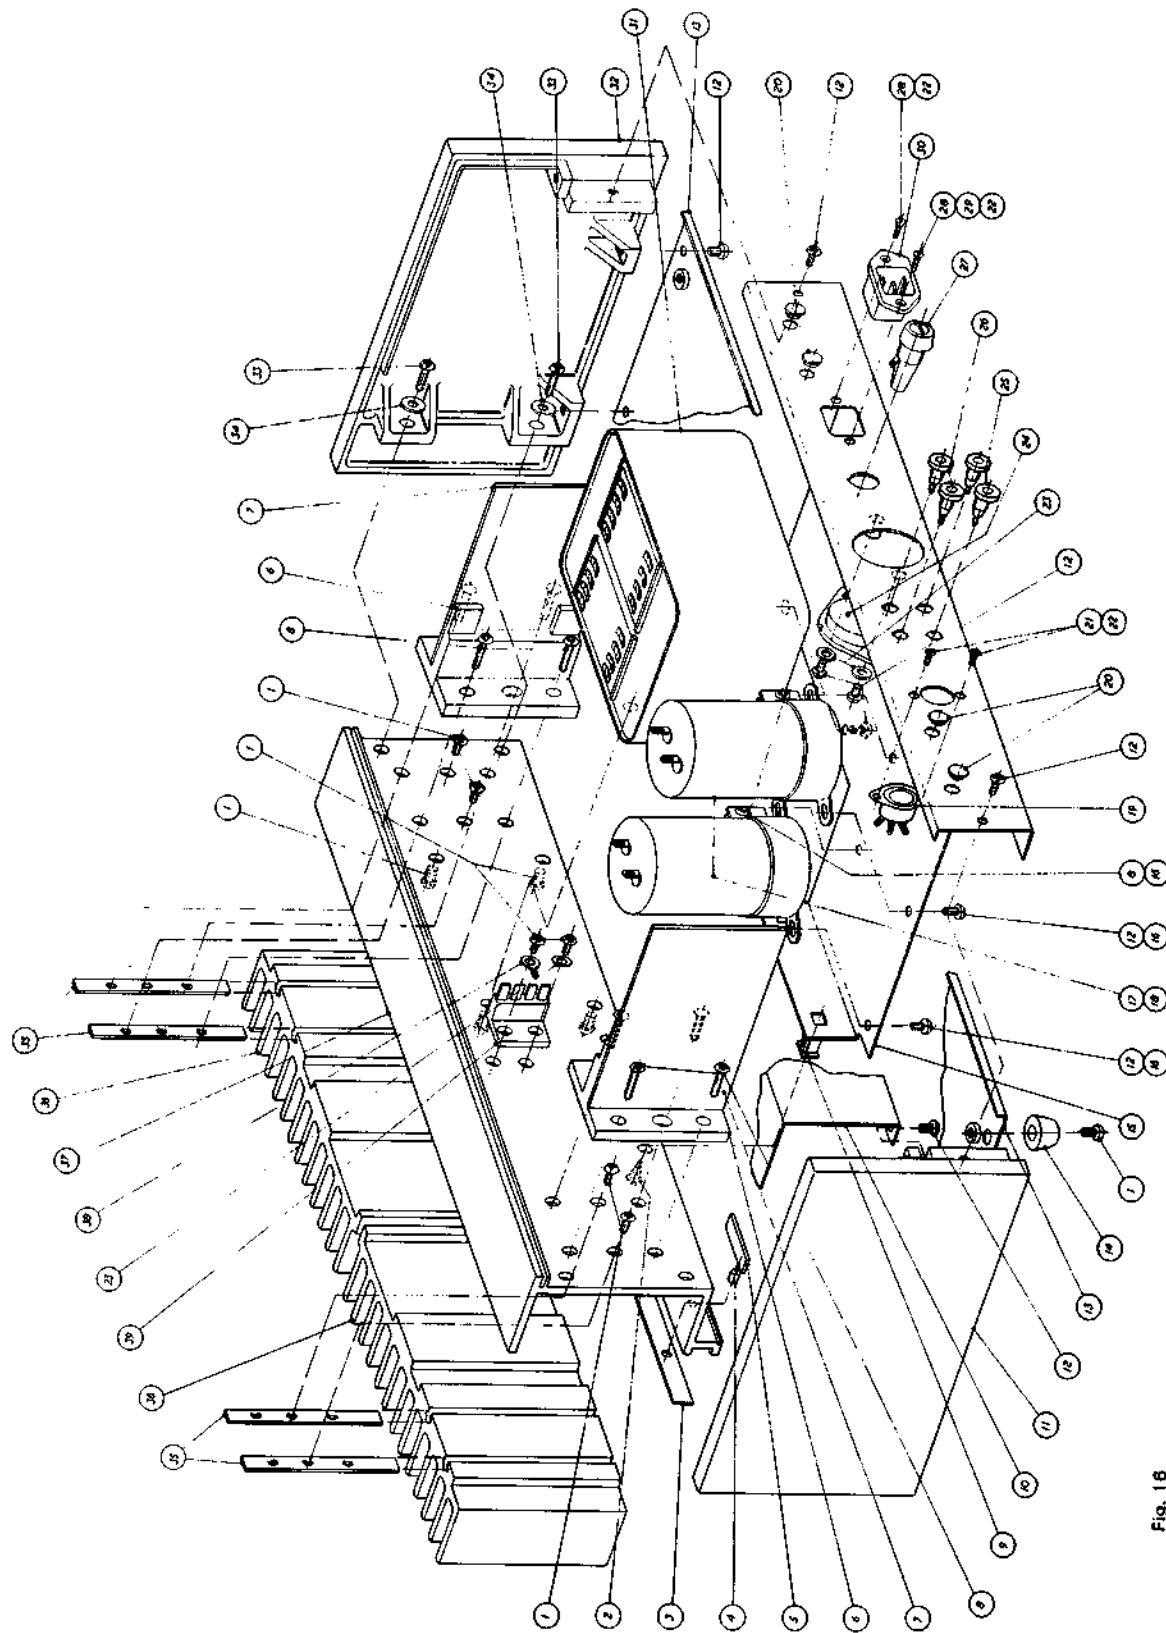


### *Assembly Diagram.*

Fig. 18

# BOARD NUMBER M12368 ISS 5 AND 6

Voltages shown are with no signal input, limiter resistors omitted and no speaker connected.  
Unmarked = negative with respect to + rail.  
Prefix E = relative to earth.

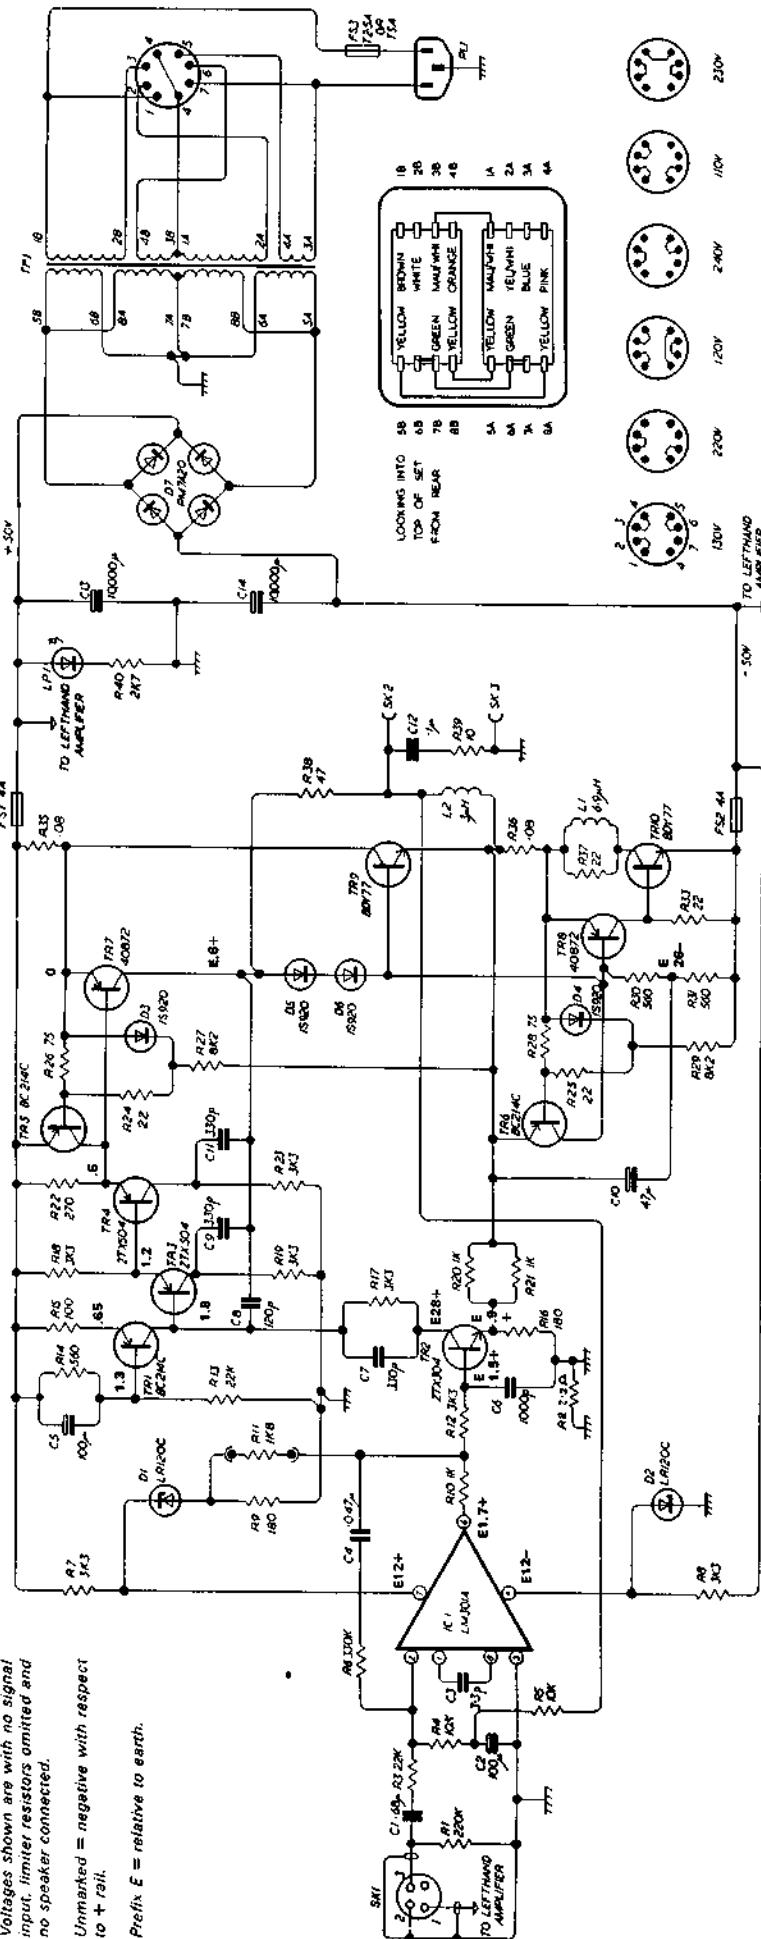


No.	Value	Tol.	Reference	Stock No.
C2	3μH	± 5%	Inductor ANCO 4447D	L12405A
C10	10.000μF		Capacitor 250V	C10NKC
C11	10.000μF		Capacitor 85V	C10KUTA
C12	10.000μF		Capacitor 85V	C10KUTA
C13	10.000μF		Capacitor 85V	C10KUTA
C14	10.000μF		Capacitor 85V	C10KUTA
T1	4A			
T2	4A			
T3	72.5A			
T4	72.5A			
T5	220V			
T6	220V			
T7	220V			
T8	220V			
T9	220V			
T10	220V			
T11	220V			
T12	220V			
T13	220V			
T14	220V			
T15	220V			
T16	220V			
T17	220V			
T18	220V			
T19	220V			
T20	220V			
T21	220V			
T22	220V			
T23	220V			
T24	220V			
T25	220V			
T26	220V			
T27	220V			
T28	220V			
T29	220V			
T30	220V			
T31	220V			
T32	220V			
T33	220V			
T34	220V			
T35	220V			
T36	220V			
T37	220V			
T38	220V			
T39	220V			
T40	220V			
T41	220V			
T42	220V			
T43	220V			
T44	220V			
T45	220V			
T46	220V			
T47	220V			
T48	220V			
T49	220V			
T50	220V			
T51	220V			
T52	220V			
T53	220V			
T54	220V			
T55	220V			
T56	220V			
T57	220V			
T58	220V			
T59	220V			
T60	220V			
T61	220V			
T62	220V			
T63	220V			
T64	220V			
T65	220V			
T66	220V			
T67	220V			
T68	220V			
T69	220V			
T70	220V			
T71	220V			
T72	220V			
T73	220V			
T74	220V			
T75	220V			
T76	220V			
T77	220V			
T78	220V			
T79	220V			
T80	220V			
T81	220V			
T82	220V			
T83	220V			
T84	220V			
T85	220V			
T86	220V			
T87	220V			
T88	220V			
T89	220V			
T90	220V			
T91	220V			
T92	220V			
T93	220V			
T94	220V			
T95	220V			
T96	220V			
T97	220V			
T98	220V			
T99	220V			
T100	220V			
T101	220V			
T102	220V			
T103	220V			
T104	220V			
T105	220V			
T106	220V			
T107	220V			
T108	220V			
T109	220V			
T110	220V			
T111	220V			
T112	220V			
T113	220V			
T114	220V			
T115	220V			
T116	220V			
T117	220V			
T118	220V			
T119	220V			
T120	220V			
T121	220V			
T122	220V			
T123	220V			
T124	220V			
T125	220V			
T126	220V			
T127	220V			
T128	220V			
T129	220V			
T130	220V			
T131	220V			
T132	220V			
T133	220V			
T134	220V			
T135	220V			
T136	220V			
T137	220V			
T138	220V			
T139	220V			
T140	220V			
T141	220V			
T142	220V			
T143	220V			
T144	220V			
T145	220V			
T146	220V			
T147	220V			
T148	220V			
T149	220V			
T150	220V			
T151	220V			
T152	220V			
T153	220V			
T154	220V			
T155	220V			
T156	220V			
T157	220V			
T158	220V			
T159	220V			
T160	220V			
T161	220V			
T162	220V			
T163	220V			
T164	220V			
T165	220V			
T166	220V			
T167	220V			
T168	220V			
T169	220V			
T170	220V			
T171	220V			
T172	220V			
T173	220V			
T174	220V			
T175	220V			
T176	220V			
T177	220V			
T178	220V			
T179	220V			
T180	220V			
T181	220V			
T182	220V			
T183	220V			
T184	220V			
T185	220V			
T186	220V			
T187	220V			
T188	220V			
T189	220V			
T190	220V			
T191	220V			
T192	220V			
T193	220V			
T194	220V			
T195	220V			
T196	220V			
T197	220V			
T198	220V			
T199	220V			
T200	220V			
T201	220V			
T202	220V			
T203	220V			
T204	220V			
T205	220V			
T206	220V			
T207	220V			
T208	220V			
T209	220V			
T210	220V			
T211	220V			
T212	220V			
T213	220V			
T214	220V			
T215	220V			
T216	220V			
T217	220V			
T218	220V			
T219	220V			
T220	220V			
T221	220V			
T222	220V			
T223	220V			
T224	220V			
T225	220V			
T226	220V			
T227	220V			
T228	220V			
T229	220V			
T230	220V			
T231	220V			
T232	220V			
T233	220V			
T234	220V			
T235	220V			
T236	220V			
T237	220V			
T238	220V			
T239	220V			
T240	220V			
T241	220V			
T242	220V			
T243	220V			
T244	220V			
T245	220V			
T246	220V			
T247	220V			
T248	220V			
T249	220V			
T250	220V			
T251	220V			
T252	220V			
T253	220V			
T254	220V			
T255	220V			
T256	220V			
T257	220V			
T258	220V			
T259	220V			
T260	220V			
T261	220V			
T262	220V			
T263	220V			
T264	220V			
T265	220V			
T266	220V			
T267	220V			
T268	220V			
T269	220V			
T270	220V			
T271	220V			
T272	220V			
T273	220V			
T274	220V			
T275	220V			
T276	220V			
T277	220V			
T278	220V			
T279	220V			
T280	220V			
T281	220V			
T282	220V			
T283	220V			
T284	220V			
T285	220V			
T286	220V			
T287	220V			
T288	220V			
T289	220V			
T290	220V			
T291	220V			
T292	220V			
T293	220V			
T294	220V			
T295	220V			
T296	220V			
T297	220V			
T298	220V			
T299	220V			
T300	220V			
T301	220V			
T302	220V			
T303	220V			
T304	220V			
T305	220V			
T306	220V			
T307	220V			
T308	220V			
T309	220V			
T310	220V			
T311	220V			
T312	220V</			

BOARD NUMBER M12368 ISS 7

Voltages shown are with no signal input. Limiter resistors omitted and

*Unmarked* = negative with respect to + *real*

*Prefix  $\mathcal{E}$  = relative to each*

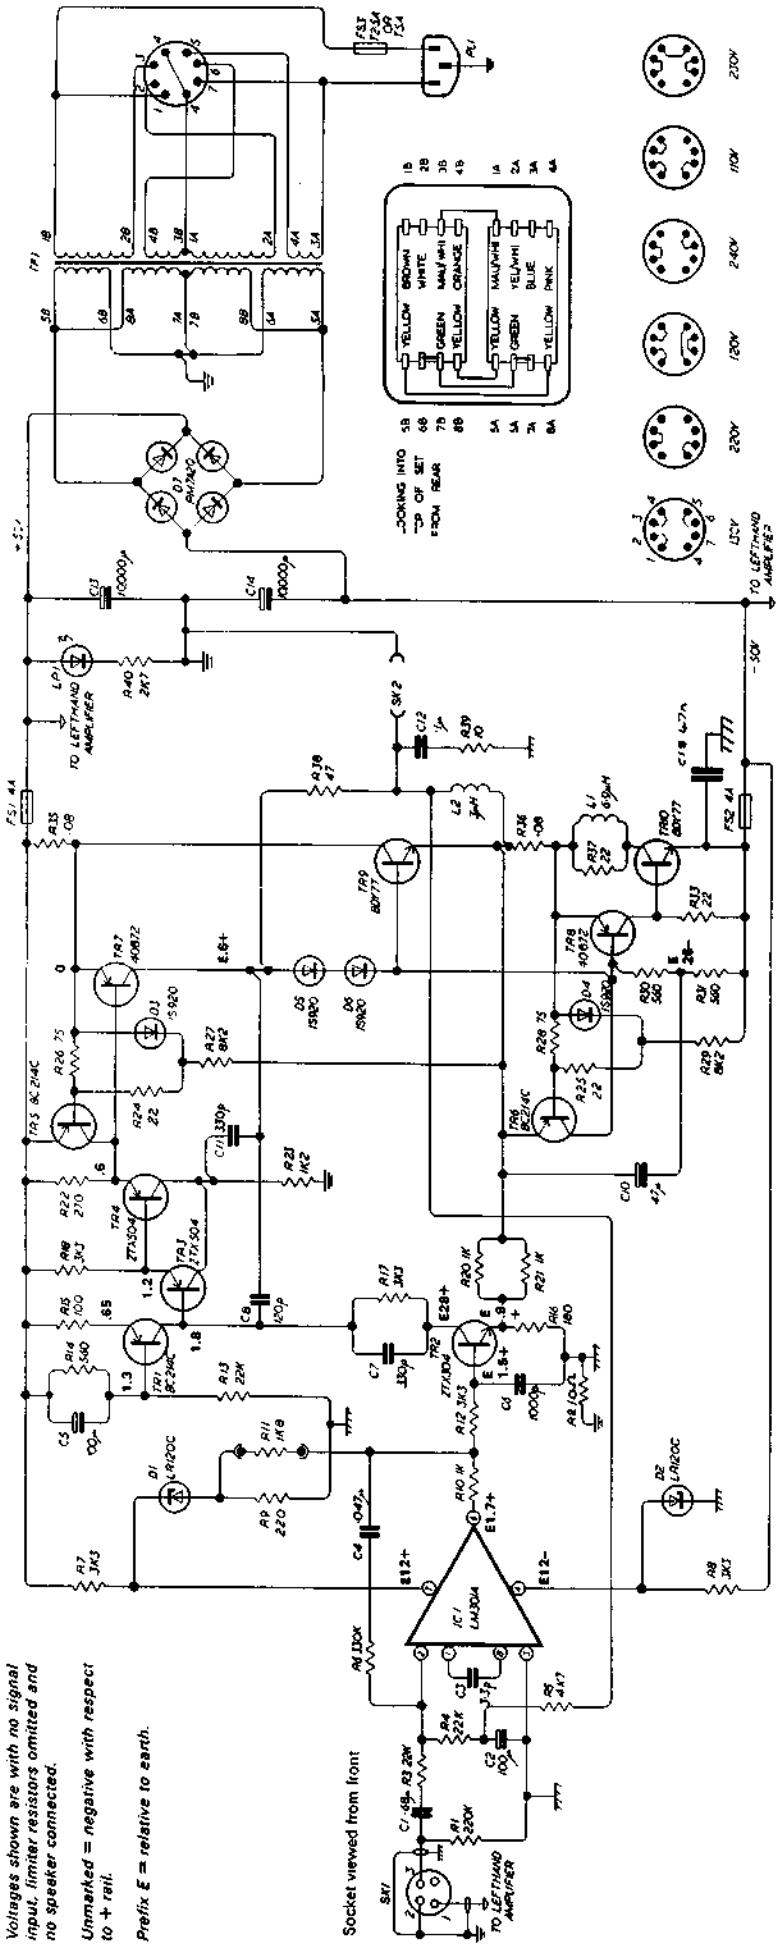


*Stock numbers listed for replacement parts, may be equivalents for original parts which are no longer available.*

BOARD NUMBER M12368 ISS 9

Voltages shown are with no signal input, limiter resistors omitted and no speaker connected.

*Unmarked = negative with respect  
to the verb*

*Prefix E = relative to earth.*

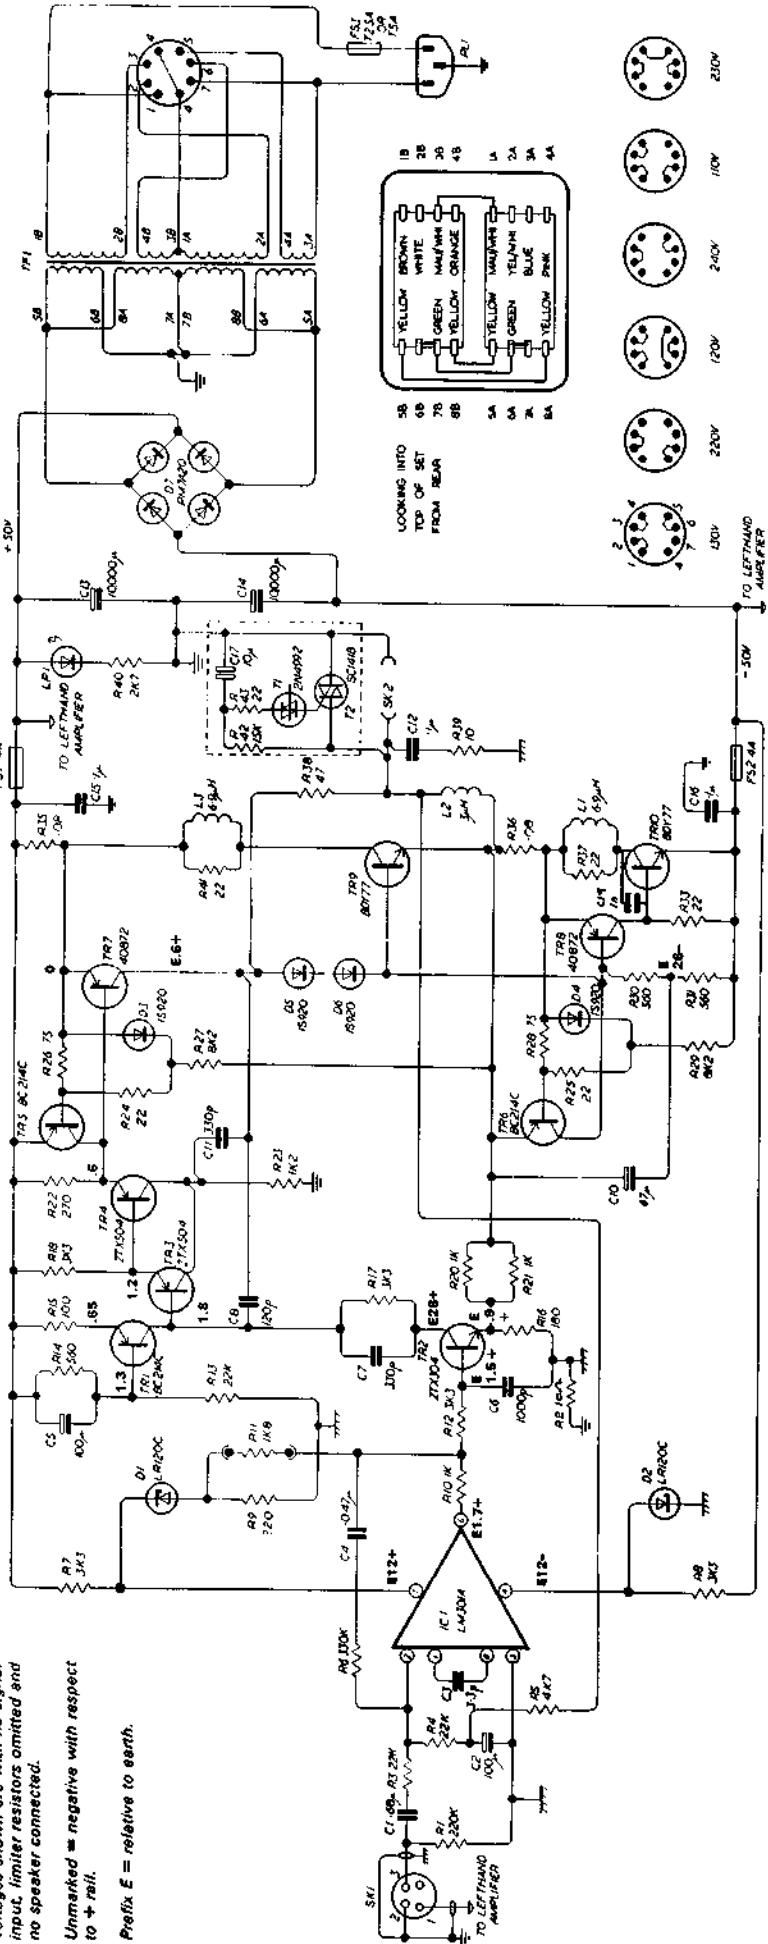

No.	Value	Tol.	Reference	Stock No.
S1			Zener Diode L1120C	D212VAA
S2			Zener Diode L1120C	D212VAA
D3			Diode 1S2020	065820B
C4			Diode 1S2020	DHS20B
C5			Diode 1S2020	DHS20B
R9			Resistor 150Ω	DHS20B
D7			Bridge Rectifier	DRW4742C
M1			L1M201A	DHM301A
L1	8.8mH	± 20%	Inductor AN00 TC1485	L1240BA
L2	2μH	± 5%	Inductor AN00 444970	L1240SA
L3	8.8mH	± 20%	Inductor AN00 TC1485	L1240SA
F51	4A			UNIB30A
F52	4A			UNIB40A
F53	72.6A		220-240V	UAR225DA
				UNIB30A
L91			Hannuks Pustak 5002-4850 Red	BL5053A
			Autoflash On/OFF A21/1282	L12282A
TF1				



No.	Value	Tol.	Reference	Stock No.
C9				CA10628
C10	47nF		Capacitor 47nF	C330P4
C11	\$20p		Capacitor	C100K
C12	0.1uF		Capacitor 250V	C100TA
C13	10.0000p		Capacitor 250V	C100KES
C14	10.0000%		Capacitor 250V	C100KES
C15	0.1uF		Capacitor 100V	C100KES
C16	0.1uF		Capacitor 100V	C100KES
C17	10nF		Capacitor 40V	C100TA
C18			Capacitor	C1100SA
T1				
T2			Transistor BC14C	DBE214C
T3			Transistor BC182 or ZTC100 or BC132	DBT304
T4			Transistor TS458 or ZT74504	DTZ74504
T5			Transistor BS55 or ZT75504	DTZ75504
T6			Transistor BC14C	DBE214C
T7			Transistor BC14C	DBE214C
T8			Transistor A9112 or 2SA740	DA9112X
T9			Transistor A9112 or 2SA740	DA9112X
T10			Transistor 2SA1024 or 2SA1078 or 17550	DB17550X
T11			Transistor 2SC4224 or 2SD2076 or 17556	DT17556X
T12			Transistor 2SC4224 or 2SD2076 or 17556	DT17556X
T13				DBE214C
T14				DBE214C
T15				DBE214C
T16				DBE214C
T17				DBE214C
T18				DBE214C
T19				DBE214C
T20				DBE214C
T21				DBE214C
T22				DBE214C
T23				DBE214C
T24				DBE214C
T25				DBE214C
T26				DBE214C
T27				DBE214C
T28				DBE214C
T29				DBE214C
T30				DBE214C
T31				DBE214C
T32				DBE214C
T33				DBE214C
T34				DBE214C
T35				DBE214C
T36				DBE214C
T37				DBE214C
T38				DBE214C
T39				DBE214C
T40				DBE214C
T41				DBE214C
T42				DBE214C
T43				DBE214C
T44				DBE214C
T45				DBE214C
T46				DBE214C
T47				DBE214C
T48				DBE214C
T49				DBE214C
T50				DBE214C
T51				DBE214C
T52				DBE214C
T53				DBE214C
T54				DBE214C
T55				DBE214C
T56				DBE214C
T57				DBE214C
T58				DBE214C
T59				DBE214C
T60				DBE214C
T61				DBE214C
T62				DBE214C
T63				DBE214C
T64				DBE214C
T65				DBE214C
T66				DBE214C
T67				DBE214C
T68				DBE214C
T69				DBE214C
T70				DBE214C
T71				DBE214C
T72				DBE214C
T73				DBE214C
T74				DBE214C
T75				DBE214C
T76				DBE214C
T77				DBE214C
T78				DBE214C
T79				DBE214C
T80				DBE214C
T81				DBE214C
T82				DBE214C
T83				DBE214C
T84				DBE214C
T85				DBE214C
T86				DBE214C
T87				DBE214C
T88				DBE214C
T89				DBE214C
T90				DBE214C
T91				DBE214C
T92				DBE214C
T93				DBE214C
T94				DBE214C
T95				DBE214C
T96				DBE214C
T97				DBE214C
T98				DBE214C
T99				DBE214C
T100				DBE214C
T101				DBE214C
T102				DBE214C
T103				DBE214C
T104				DBE214C
T105				DBE214C
T106				DBE214C
T107				DBE214C
T108				DBE214C
T109				DBE214C
T110				DBE214C
T111				DBE214C
T112				DBE214C
T113				DBE214C
T114				DBE214C
T115				DBE214C
T116				DBE214C
T117				DBE214C
T118				DBE214C
T119				DBE214C
T120				DBE214C
T121				DBE214C
T122				DBE214C
T123				DBE214C
T124				DBE214C
T125				DBE214C
T126				DBE214C
T127				DBE214C
T128				DBE214C
T129				DBE214C
T130				DBE214C
T131				DBE214C
T132				DBE214C
T133				DBE214C
T134				DBE214C
T135				DBE214C
T136				DBE214C
T137				DBE214C
T138				DBE214C
T139				DBE214C
T140				DBE214C
T141				DBE214C
T142				DBE214C
T143				DBE214C
T144				DBE214C
T145				DBE214C
T146				DBE214C
T147				DBE214C
T148				DBE214C
T149				DBE214C
T150				DBE214C
T151				DBE214C
T152				DBE214C
T153				DBE214C
T154				DBE214C
T155				DBE214C
T156				DBE214C
T157				DBE214C
T158				DBE214C
T159				DBE214C
T160				DBE214C
T161				DBE214C
T162				DBE214C
T163				DBE214C
T164				DBE214C
T165				DBE214C
T166				DBE214C
T167				DBE214C
T168				DBE214C
T169				DBE214C
T170				DBE214C
T171				DBE214C
T172				DBE214C
T173				DBE214C
T174				DBE214C
T175				DBE214C
T176				DBE214C
T177				DBE214C
T178				DBE214C
T179				DBE214C
T180				DBE214C
T181				DBE214C
T182				DBE214C
T183				DBE214C
T184				DBE214C
T185				DBE214C
T186				DBE214C
T187				DBE214C
T188				DBE214C
T189				DBE214C
T190				DBE214C
T191				DBE214C
T192				DBE214C
T193				DBE214C
T194				DBE214C
T195				DBE214C
T196				DBE214C
T197				DBE214C
T198				DBE214C
T199				DBE214C
T200				DBE214C
T201				DBE214C
T202				DBE214C
T203				DBE214C
T204				DBE214C
T205				DBE214C
T206				DBE214C
T207				DBE214C
T208				DBE214C
T209				DBE214C
T210				DBE214C
T211				DBE214C
T212				DBE214C
T213				DBE214C
T214				DBE214C
T215				DBE214C
T216				DBE214C
T217				DBE214C
T218				DBE214C
T219				DBE214C
T220				DBE214C
T221				DBE214C
T222				DBE214C
T223				DBE214C
T224				DBE214C
T225				DBE214C
T226				DBE214C
T227				DBE214C
T228				DBE214C
T229				DBE214C
T230				DBE214C
T231				DBE214C
T232				DBE214C
T233				DBE214C
T234				DBE214C
T235				DBE214C
T236				DBE214C
T237				DBE214C
T238				DBE214C
T239				DBE214C
T240				DBE214C
T241				DBE214C
T242				DBE214C
T243				DBE214C
T244				DBE214C
T245				DBE214C
T246				DBE214C
T247				DBE214C
T248				DBE214C
T249				DBE214C
T250				DBE214C
T251				DBE214C
T252				DBE214C
T253				DBE214C
T254				DBE214C
T255				DBE214C
T256				DBE214C
T257				DBE214C
T258				DBE214C
T259				DBE214C
T260				DBE214C
T261				DBE214C
T262				DBE214C
T263				DBE214C
T264				DBE214C
T265				DBE214C
T266				DBE214C
T267				DBE214C
T268				DBE214C
T269				DBE214C
T270				DBE214C
T271				DBE214C
T272				DBE214C
T273				DBE214C
T274				DBE214C
T275				DBE214C
T276				DBE214C
T277				DBE214C
T278				DBE214C
T279				DBE214C
T280				DBE214C
T281				DBE214C
T282				DBE214C
T283				DBE214C
T284				DBE214C
T285				DBE214C
T286				DBE214C
T287				DBE214C
T288				DBE214C
T289				DBE214C
T290				DBE214C
T291				DBE214C
T292				DBE214C
T293				DBE214C
T294				DBE214C
T295				DBE214C
T296				DBE214C
T297				DBE214C
T298				DBE214C
T299				DBE214C
T300				DBE214C
T301				DBE214C
T302				DBE214C
T303				DBE214C
T304				DBE214C
T305				DBE214C
T306				DBE214C
T307				DBE214C
T308				DBE214C
T309				DBE214C
T310				DBE214C
T311				DBE214C
T312				DBE214C
T313				DBE214C
T314				DBE214C
T315				DBE214C
T316				DBE214C
T317				DBE214C
T318				DBE214C
T319				DBE214C
T320				DBE214C
T321				DBE214C
T322				DBE214C
T323				DBE214C
T324				DBE214C
T325				DBE214C
T326				DBE214C
T327				DBE214C
T328				DBE214C
T329				DBE214C
T330				DBE214C
T331				DBE214C

No.	Value	Std	Reference	Spec No.
R22	862	± 8%	Resistor	R#2R011
R23	75	± 10%	Resistor	R#2R011
R24	812	± 5%	Resistor	R#2R011
A30	540	± 10%	Resistor 2.5kW	R#2R015
A31	580	± 10%	Resistor 2.5kW	R#2R015
A33	22	± 10%	Resistor	R#2R011
A35	0.04		Resistor	R#031JY
E73	0.08		Resistor Adhesive D#HG Ad#11238	R#031JY
A37	22	± 10%	Resistor	R#2R011
A38	47	± 5%	Resistor	R#2R011
A39	10	± 10%	Resistor	R#10R011
A40	217		Resistor 1.6kW	R#2R018
A41	22	± 10%	Resistor	R#2R011
A42	19K	± 10%	Resistor	R#15K011
A43	22	± 10%	Resistor	R#2R011
C1	0.082uF		Capacitor 100V	C#000HS
C2	100pF	± 10%	Capacitor 8V	C#100H8
C3	3.3nF	± 20%	Capacitor	C#300M
C4	0.047uF		Capacitor 250V	C#70U015
C5	100pF		Capacitor 8V	C#100BZ
C6	1.000uF		Capacitor 400V	C#1000K
C7	320pF	± 20%	Capacitor	C#30PFL
C8	120pF	± 5%	Capacitor	C#120U

No.	No.	Value	Tol.	Relationship	Element No.
R1	A1	220K	$\pm 10\%$	Resistor	R120K1
R2	I0	10	$\pm 5\%$	Resistor	R10R01
R3	I0	22K	$\pm 10\%$	Resistor	R22K01
R4	I0	22K	$\pm 10\%$	Resistor	R22K01
R5	I0	4.7K	$\pm 10\%$	Resistor	R4.7K01
R6	I0	390K	$\pm 10\%$	Resistor	R390K01
R7	I0	2K3	$\pm 10\%$	Resistor	R2K301
R8	I0	2K3	$\pm 10\%$	Resistor	R2K301
R9	I0	220	$\pm 10\%$	Resistor	R220U1
R10	I0	1K	$\pm 10\%$	Resistor	R100U1
R11	I0	1K8	$\pm 10\%$	Resistor	R1K80U1
R12	I0	3K3	$\pm 10\%$	Resistor	R3K30U1
R13	I0	22K	$\pm 10\%$	Resistor	R22K0U1
R14	I0	600	$\pm 10\%$	Resistor	R600U1
R15	I0	100	$\pm 10\%$	Resistor	R100U1
R16	I0	180	$\pm 10\%$	Resistor	R180U1
R17	I0	2K3	$\pm 10\%$	Resistor	R2K30U1
R18	I0	3K3	$\pm 10\%$	Resistor	R3K30U1
R19	I0	600	$\pm 10\%$	Resistor	R600U1
R20	I0	1K	$\pm 10\%$	Resistor	R1K00U1
R21	I0	1K	$\pm 10\%$	Resistor	R1K00U1
R22	I0	270	$\pm 10\%$	Resistor	R270U1
R23	I0	1K2	$\pm 10\%$	Resistor 1 MW	R1K20M1
R24	I0	22	$\pm 10\%$	Resistor	R22R0U1
R25	I0	22	$\pm 10\%$	Resistor	R22R0U1
R26	I0	75	$\pm 6\%$	Resistor	R75R021

*Stock numbers listed for replacement parts, may be equivalents for original parts which are no longer available, therefore manufacturers and tolerances may vary.*

# BOARD NUMBER M12368 ISS 9 AND 10

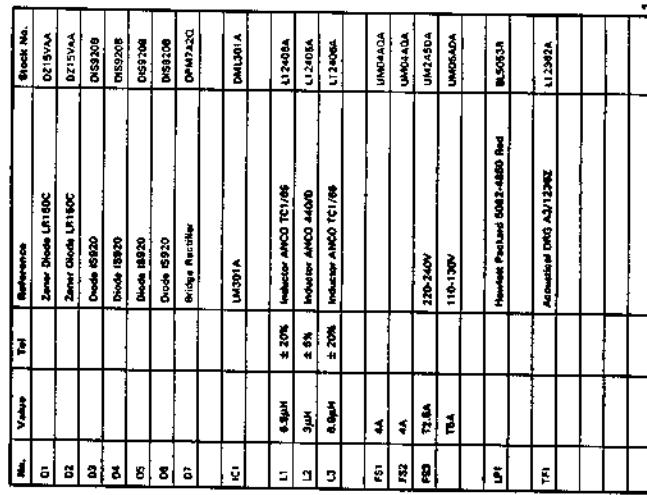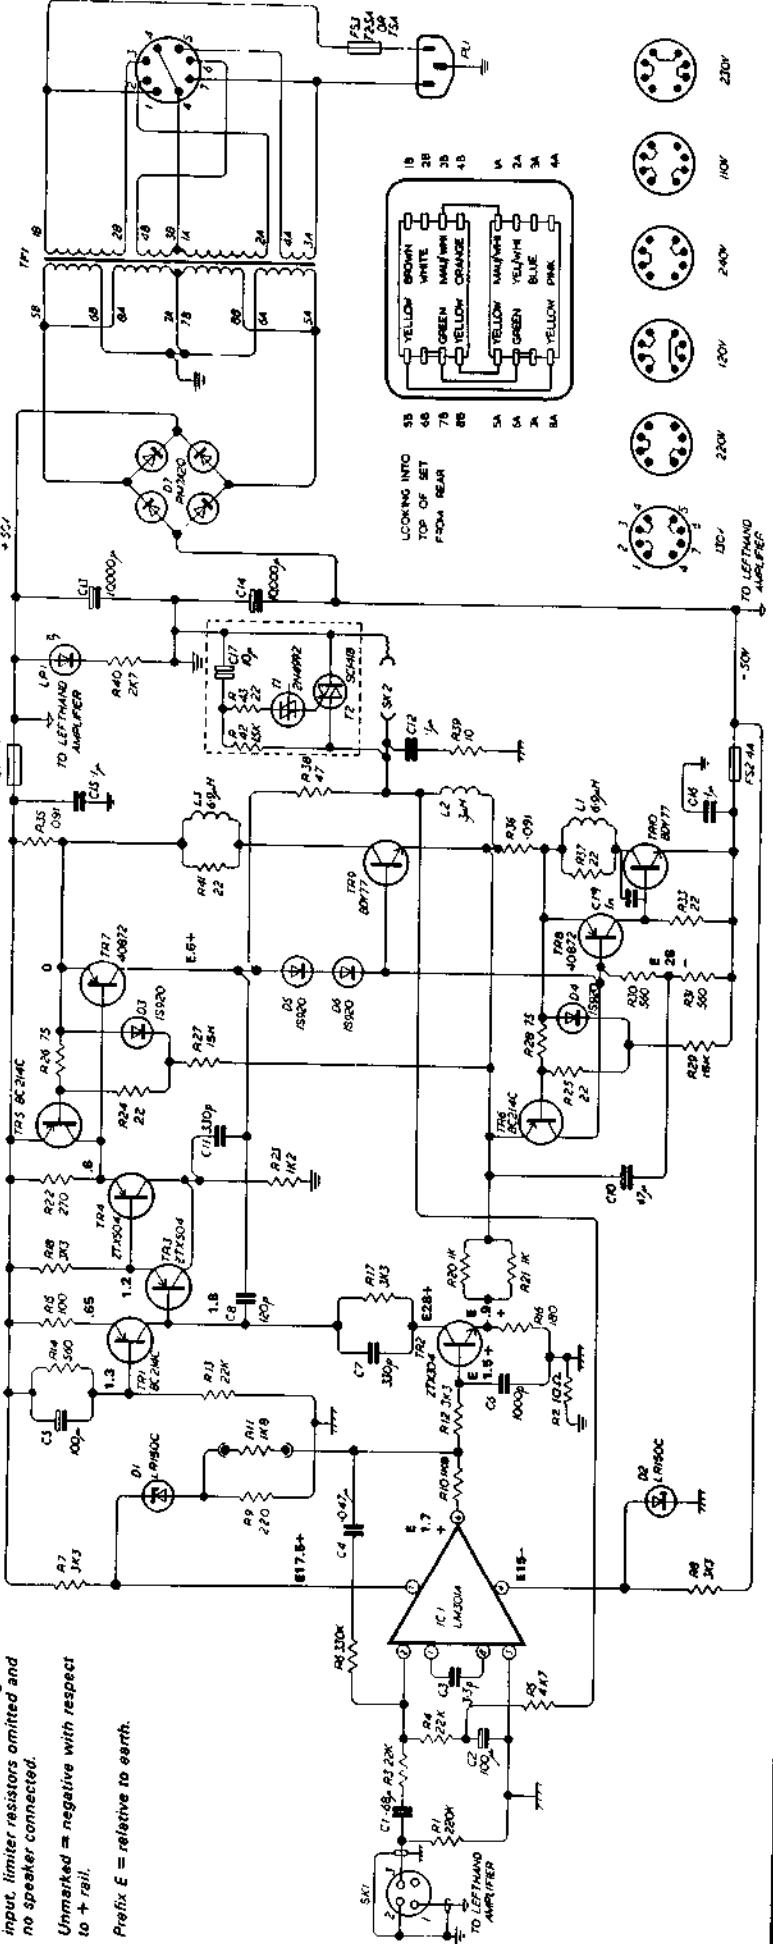

No.	Value	Tol.	Reference	Stock No.
C1				0215V/A
C2				0215V/A
C3	15K	± 1%	Resistor	047026
R1	10	± 5%	Resistor	0100U1
R2	22K	± 5%	Resistor	0220U1
R3	1.2	± 10%	Resistor	015KU1
R4	22K	± 5%	Resistor	0220U1
R5	1.8	± 10%	Resistor	015KU1
R6	22K	± 5%	Resistor	0220U1
R7	0.65	± 10%	Resistor	015KU1
R8	220	± 10%	Resistor	0220U1
R9	220	± 10%	Resistor	0220U1
R10	1.3	± 10%	Resistor	015KU1
R11	22K	± 5%	Resistor	0220U1
R12	22K	± 5%	Resistor	0220U1
R13	0.65	± 10%	Resistor	015KU1
R14	220	± 10%	Resistor	0220U1
R15	220	± 10%	Resistor	0220U1
R16	1.15	± 10%	Resistor	015KU1
R17	220K	± 10%	Resistor	0220U1
R18	220K	± 10%	Resistor	0220U1
R19	220K	± 10%	Resistor	0220U1
R20	1.15	± 10%	Resistor	015KU1
R21	220K	± 10%	Resistor	0220U1
R22	220K	± 10%	Resistor	0220U1
R23	220K	± 10%	Resistor	0220U1
R24	0.65	± 10%	Resistor	015KU1
R25	220K	± 10%	Resistor	0220U1
R26	220K	± 10%	Resistor	0220U1
R27	1.15	± 10%	Resistor	015KU1
R28	220K	± 10%	Resistor	0220U1
R29	10	± 10%	Resistor	0100U1
R30	220	± 10%	Resistor	0220U1
R31	0.65	± 10%	Resistor	015KU1
R32	220K	± 10%	Resistor	0220U1
R33	220K	± 10%	Resistor	0220U1
R34	1.15	± 10%	Resistor	015KU1
R35	0.001		Resistor	0010U1
R36	0.001		Resistor	0010U1
R37	2.2	± 10%	Resistor	0220U1
R38	47	± 10%	Resistor	0470U1
R39	10	± 10%	Resistor	0100U1
R40	220	± 10%	Resistor	0220U1
R41	22	± 10%	Resistor	0220U1
R42	1.15	± 10%	Resistor	015KU1
R43	22	± 10%	Resistor	0220U1
R44	3.3P	± 20%	Capacitor	0330U1
R45	0.047uF		Capacitor 0.047uF	0047U1
R46	100pF		Capacitor 100pF	0100U1
R47	100nF		Capacitor 100nF	0100U1
R48	100pF		Capacitor 100pF	0100U1
R49	100pF		Capacitor 100pF	0100U1
R50	100pF		Capacitor 100pF	0100U1
R51	4A			
R52	4A			
R53	72.8A			
R54	116-120V			
R55	116-120V			
R56	116-120V			
R57	116-120V			
R58	116-120V			
R59	116-120V			
R60	116-120V			
R61	116-120V			
R62	116-120V			
R63	116-120V			
R64	116-120V			
R65	116-120V			
R66	116-120V			
R67	116-120V			
R68	116-120V			
R69	116-120V			
R70	116-120V			
R71	116-120V			
R72	116-120V			
R73	116-120V			
R74	116-120V			
R75	116-120V			
R76	116-120V			
R77	116-120V			
R78	116-120V			
R79	116-120V			
R80	116-120V			
R81	116-120V			
R82	116-120V			
R83	116-120V			
R84	116-120V			
R85	116-120V			
R86	116-120V			
R87	116-120V			
R88	116-120V			
R89	116-120V			
R90	116-120V			
R91	116-120V			
R92	116-120V			
R93	116-120V			
R94	116-120V			
R95	116-120V			
R96	116-120V			
R97	116-120V			
R98	116-120V			
R99	116-120V			
R100	116-120V			
R101	116-120V			
R102	116-120V			
R103	116-120V			
R104	116-120V			
R105	116-120V			
R106	116-120V			
R107	116-120V			
R108	116-120V			
R109	116-120V			
R110	116-120V			
R111	116-120V			
R112	116-120V			
R113	116-120V			
R114	116-120V			
R115	116-120V			
R116	116-120V			
R117	116-120V			
R118	116-120V			
R119	116-120V			
R120	116-120V			
R121	116-120V			
R122	116-120V			
R123	116-120V			
R124	116-120V			
R125	116-120V			
R126	116-120V			
R127	116-120V			
R128	116-120V			
R129	116-120V			
R130	116-120V			
R131	116-120V			
R132	116-120V			
R133	116-120V			
R134	116-120V			
R135	116-120V			
R136	116-120V			
R137	116-120V			
R138	116-120V			
R139	116-120V			
R140	116-120V			
R141	116-120V			
R142	116-120V			
R143	116-120V			
R144	116-120V			
R145	116-120V			
R146	116-120V			
R147	116-120V			
R148	116-120V			
R149	116-120V			
R150	116-120V			
R151	116-120V			
R152	116-120V			
R153	116-120V			
R154	116-120V			
R155	116-120V			
R156	116-120V			
R157	116-120V			
R158	116-120V			
R159	116-120V			
R160	116-120V			
R161	116-120V			
R162	116-120V			
R163	116-120V			
R164	116-120V			
R165	116-120V			
R166	116-120V			
R167	116-120V			
R168	116-120V			
R169	116-120V			
R170	116-120V			
R171	116-120V			
R172	116-120V			
R173	116-120V			
R174	116-120V			
R175	116-120V			
R176	116-120V			
R177	116-120V			
R178	116-120V			
R179	116-120V			
R180	116-120V			
R181	116-120V			
R182	116-120V			
R183	116-120V			
R184	116-120V			
R185	116-120V			
R186	116-120V			
R187	116-120V			
R188	116-120V			
R189	116-120V			
R190	116-120V			
R191	116-120V			
R192	116-120V			
R193	116-120V			
R194	116-120V			
R195	116-120V			
R196	116-120V			
R197	116-120V			
R198	116-120V			
R199	116-120V			
R200	116-120V			
R201	116-120V			
R202	116-120V			
R203	116-120V			
R204	116-120V			
R205	116-120V			
R206	116-120V			
R207	116-120V			
R208	116-120V			
R209	116-120V			
R210	116-120V			
R211	116-120V			
R212	116-120V			
R213	116-120V			
R214	116-120V			
R215	116-120V			
R216	116-120V			
R217	116-120V			
R218	116-120V			
R219	116-120V			
R220	116-120V			
R221	116-120V			
R222	116-120V			
R223	116-120V			
R224	116-120V			
R225	116-120V			
R226	116-120V			
R227	116-120V			
R228	116-120V			
R229	116-120V			
R230	116-120V			
R231	116-120V			
R232	116-120V			
R233	116-120V			
R234	116-120V			
R235	116-120V			
R236	116-120V			
R237	116-120V			
R238	116-120V			
R239	116-120V			
R240	116-120V			
R241	116-120V			
R242	116-120V			
R243	116-120V			
R244	116-120V			
R245	116-120V			
R246	116-120V			
R247	116-120V			
R248	116-120V			
R249	116-120V			
R250	116-120V			
R251	116-120V			
R252	116-120V			
R253	116-120V			
R254	116-120V			
R255	116-120V			
R256	116-120V			
R257	116-120V			
R258	116-120V			
R259	116-120V			
R260	116-120V			
R261	116-120V			
R262	116-120V			
R263	116-120V			
R264	116-120V			
R265	116-120V			
R266	116-120V			
R267	116-120V			
R268	116-120V			
R269	116-120V			
R270	116-120V</td			

BOARD NUMBER M12368 ISS 9 AND 10

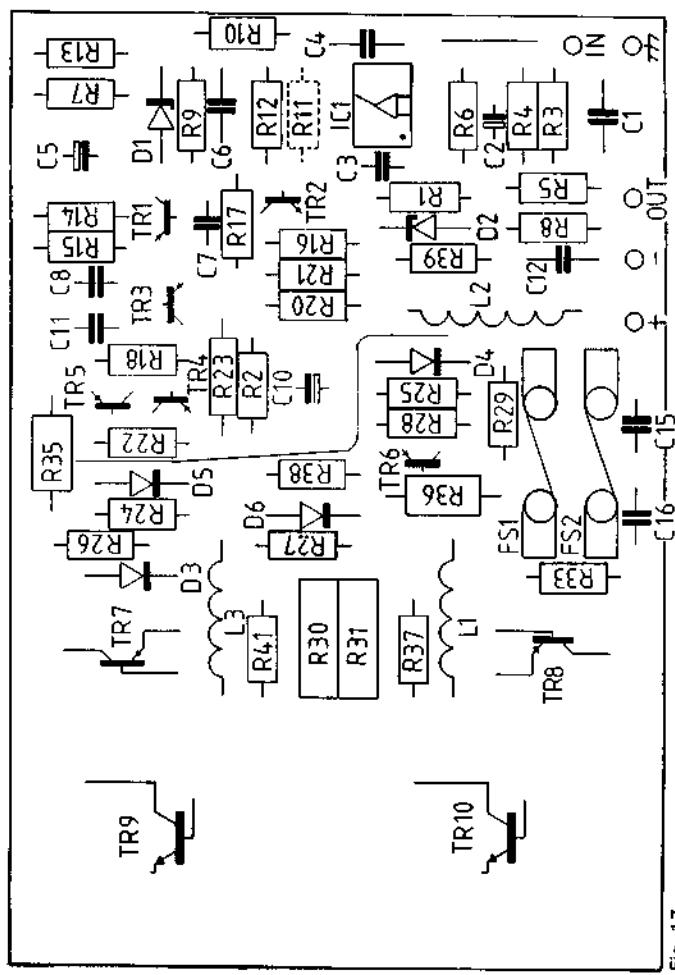



Fig. 17

BOARD NUMBER M12565 ISS 3

Voltages shown are with no signal input, limiter resistors omitted and no speaker connected.

*Unmarked = negative with respect  
to + refl*

*Prefix E = relative to earth.*

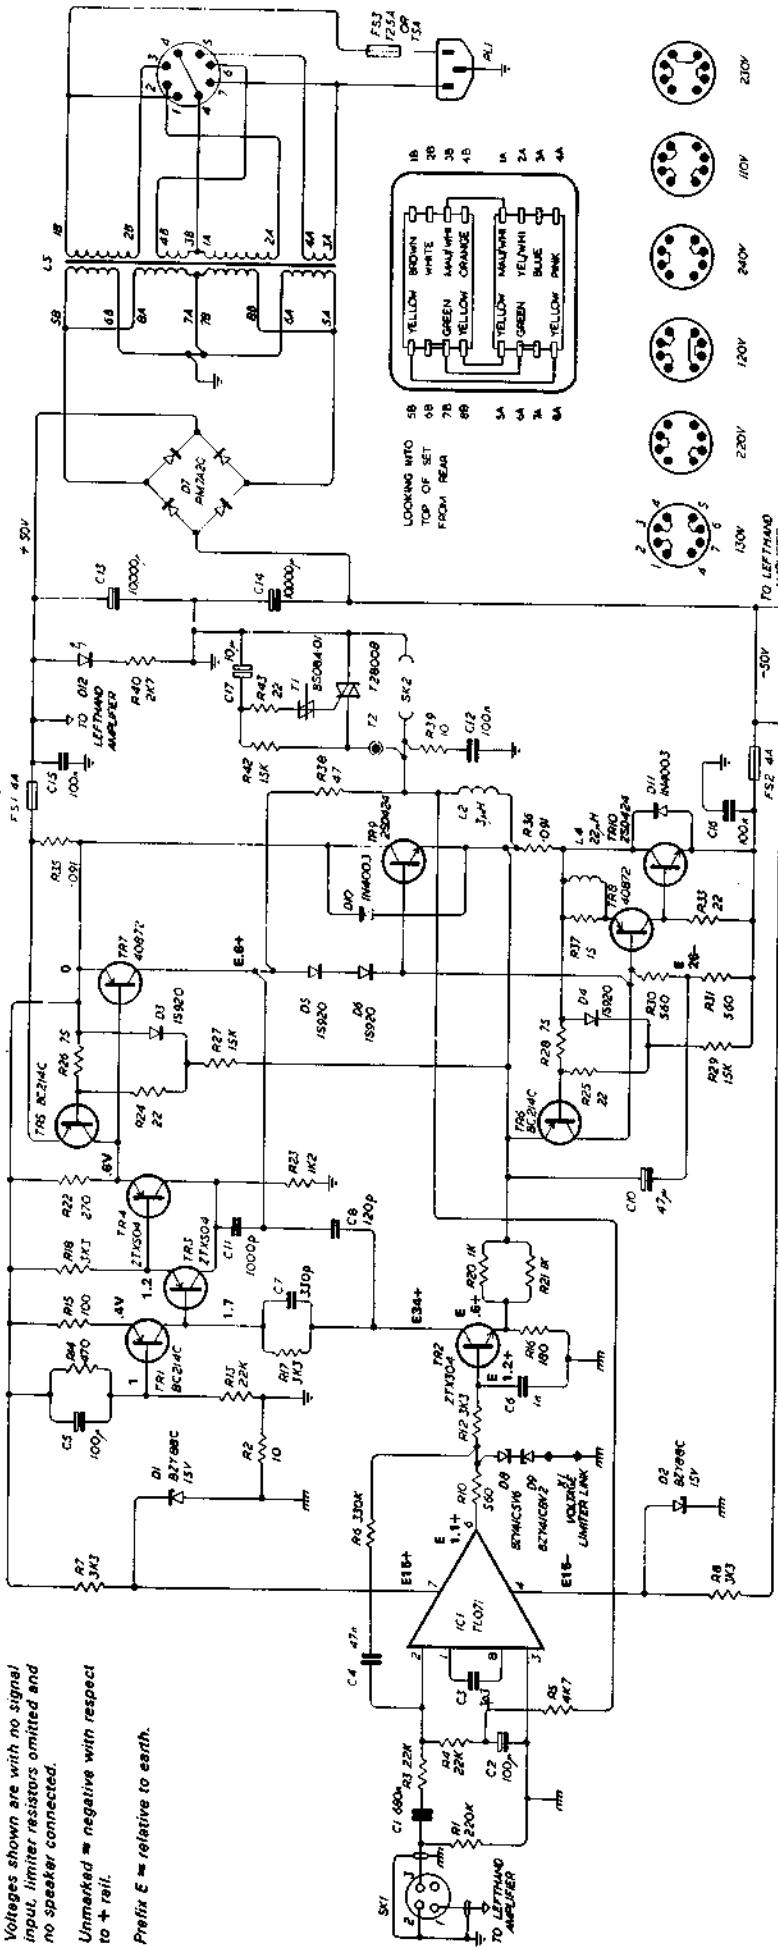

**BOARD NUMBER M12565 ISS 3**





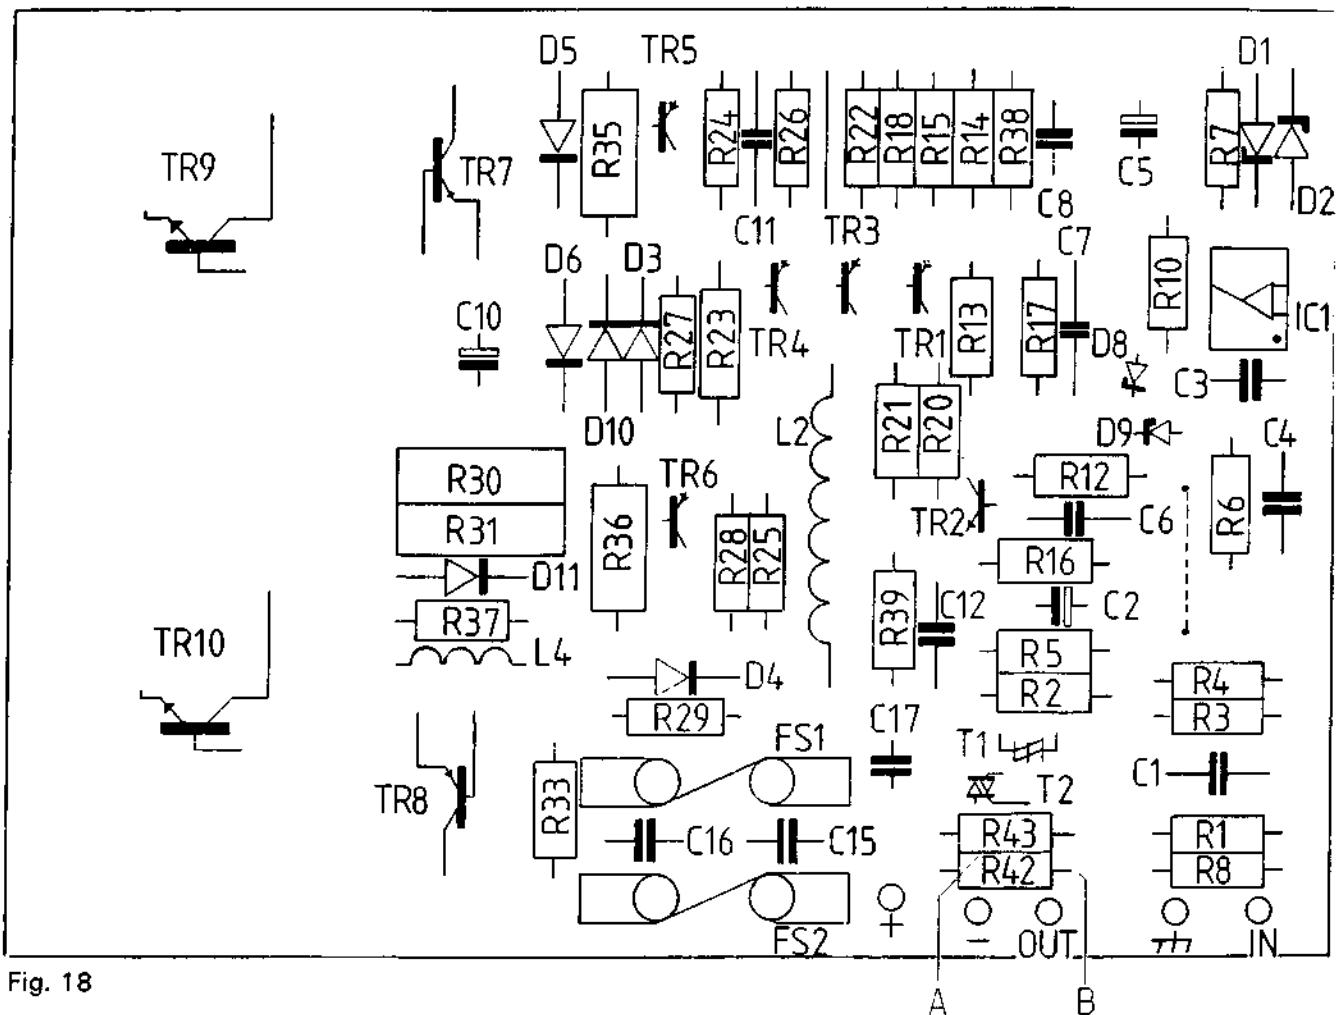


Fig. 18

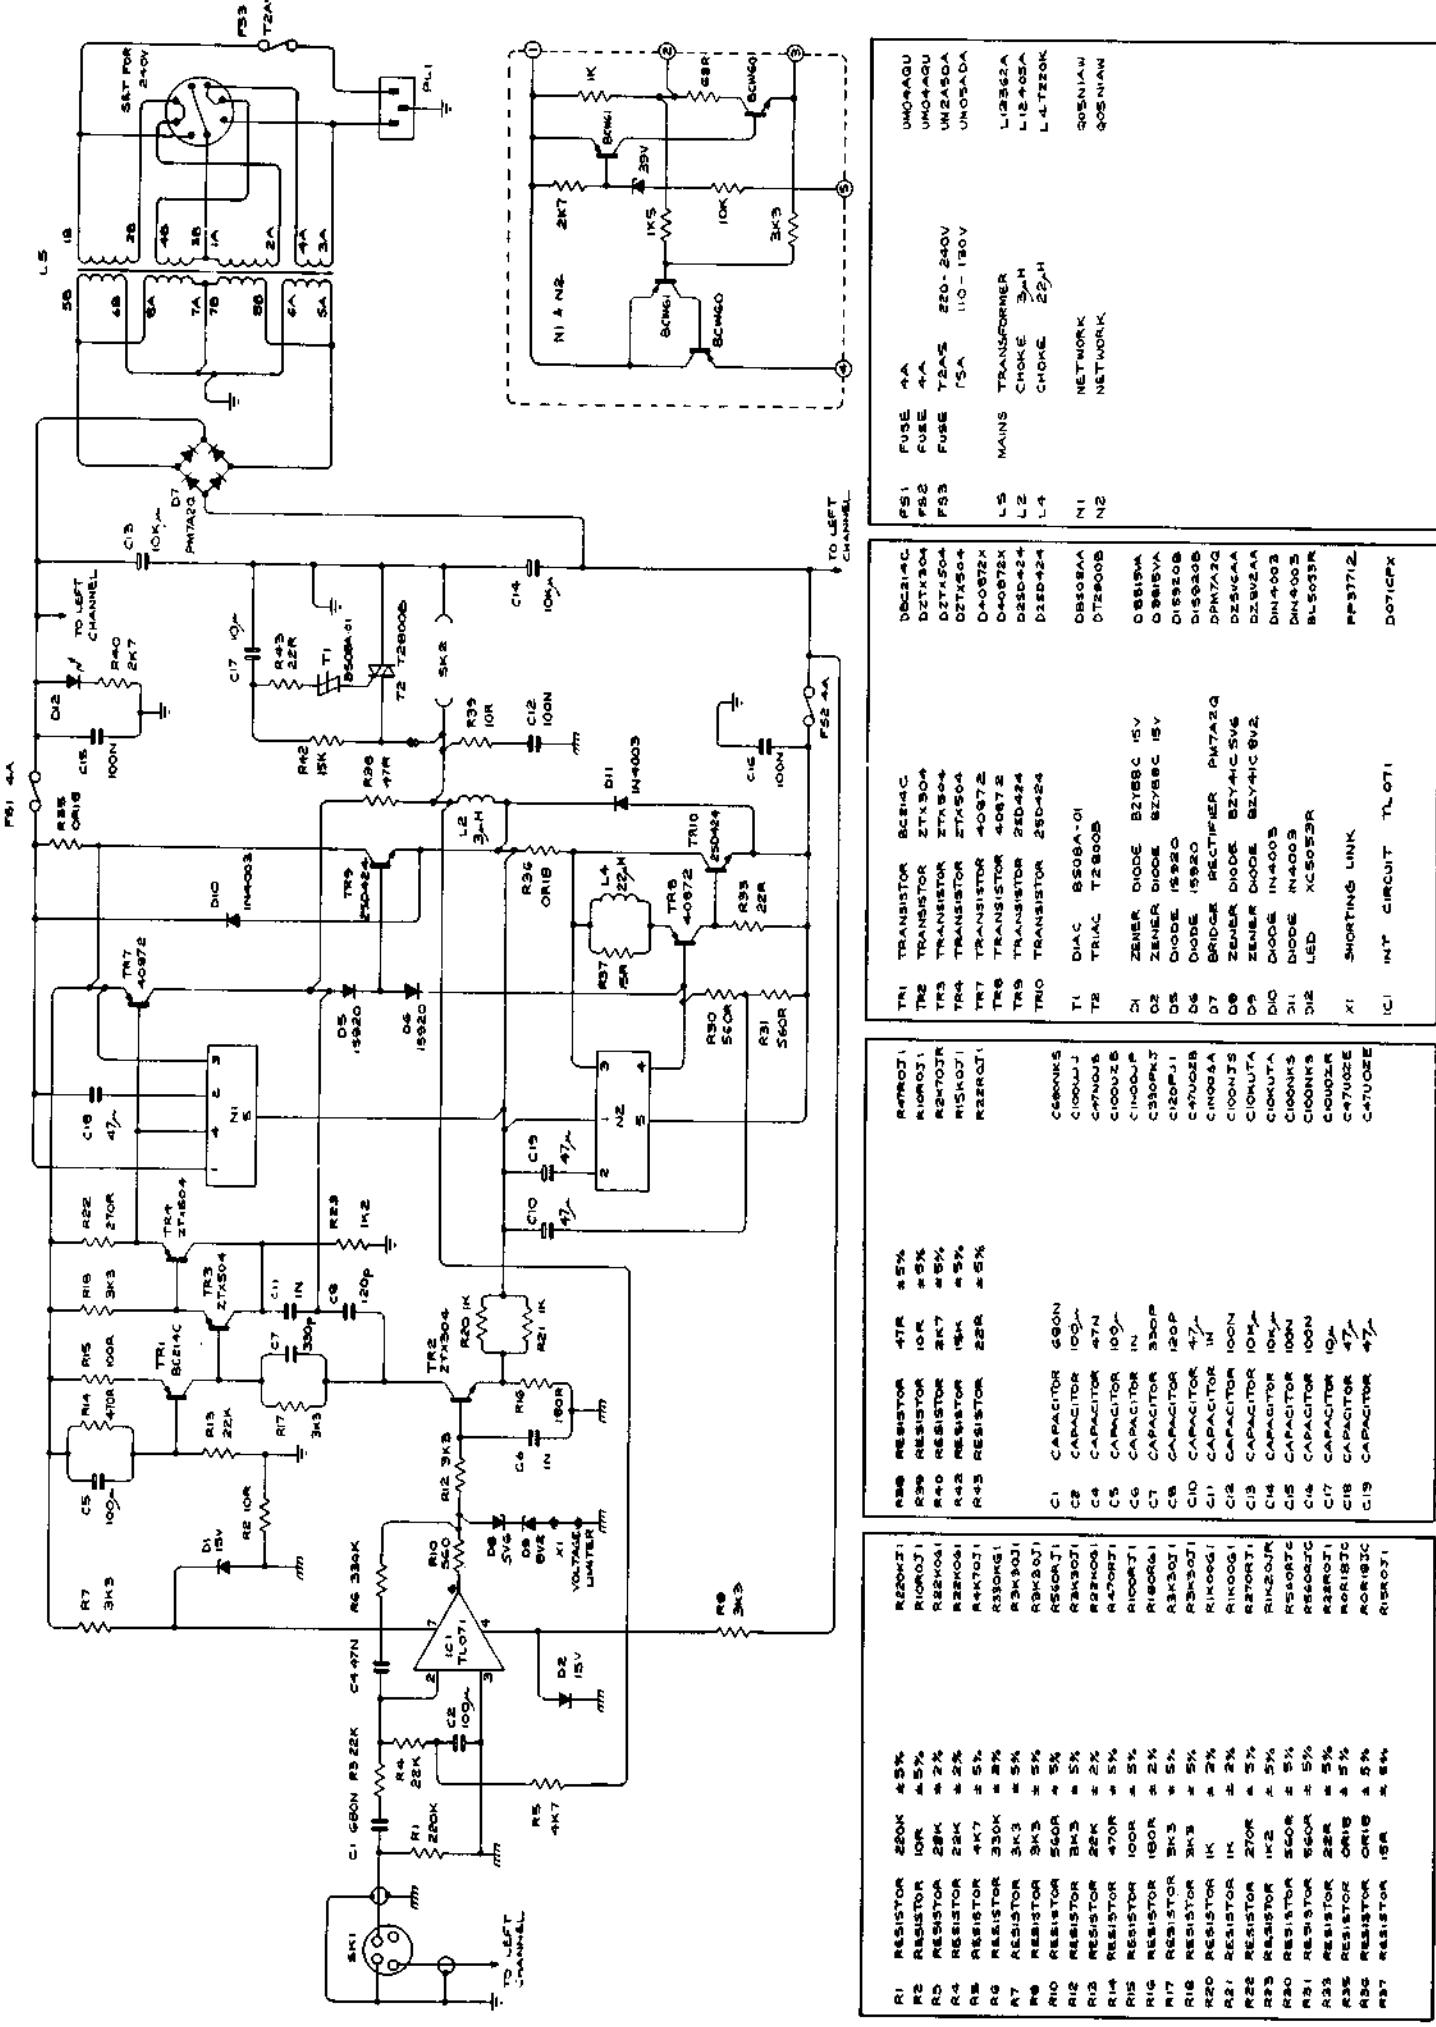

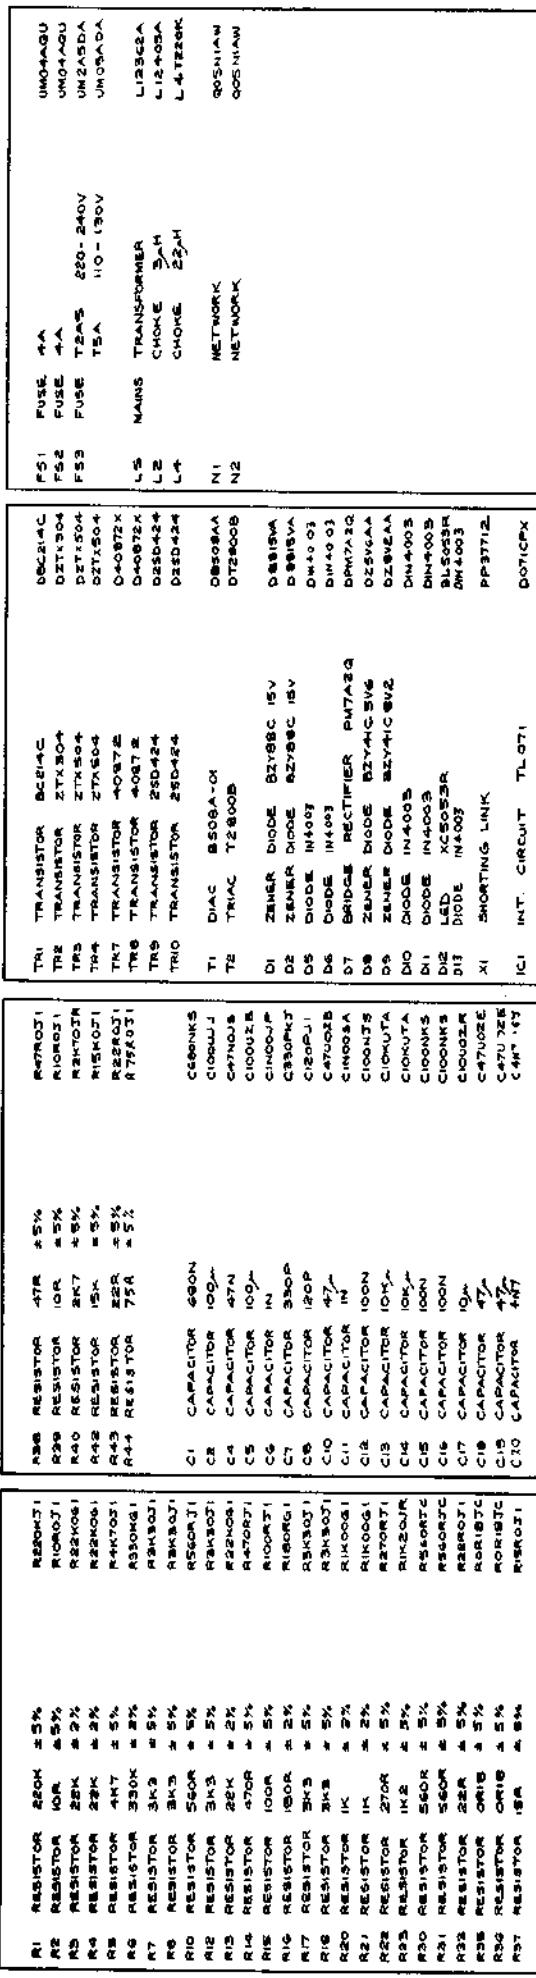

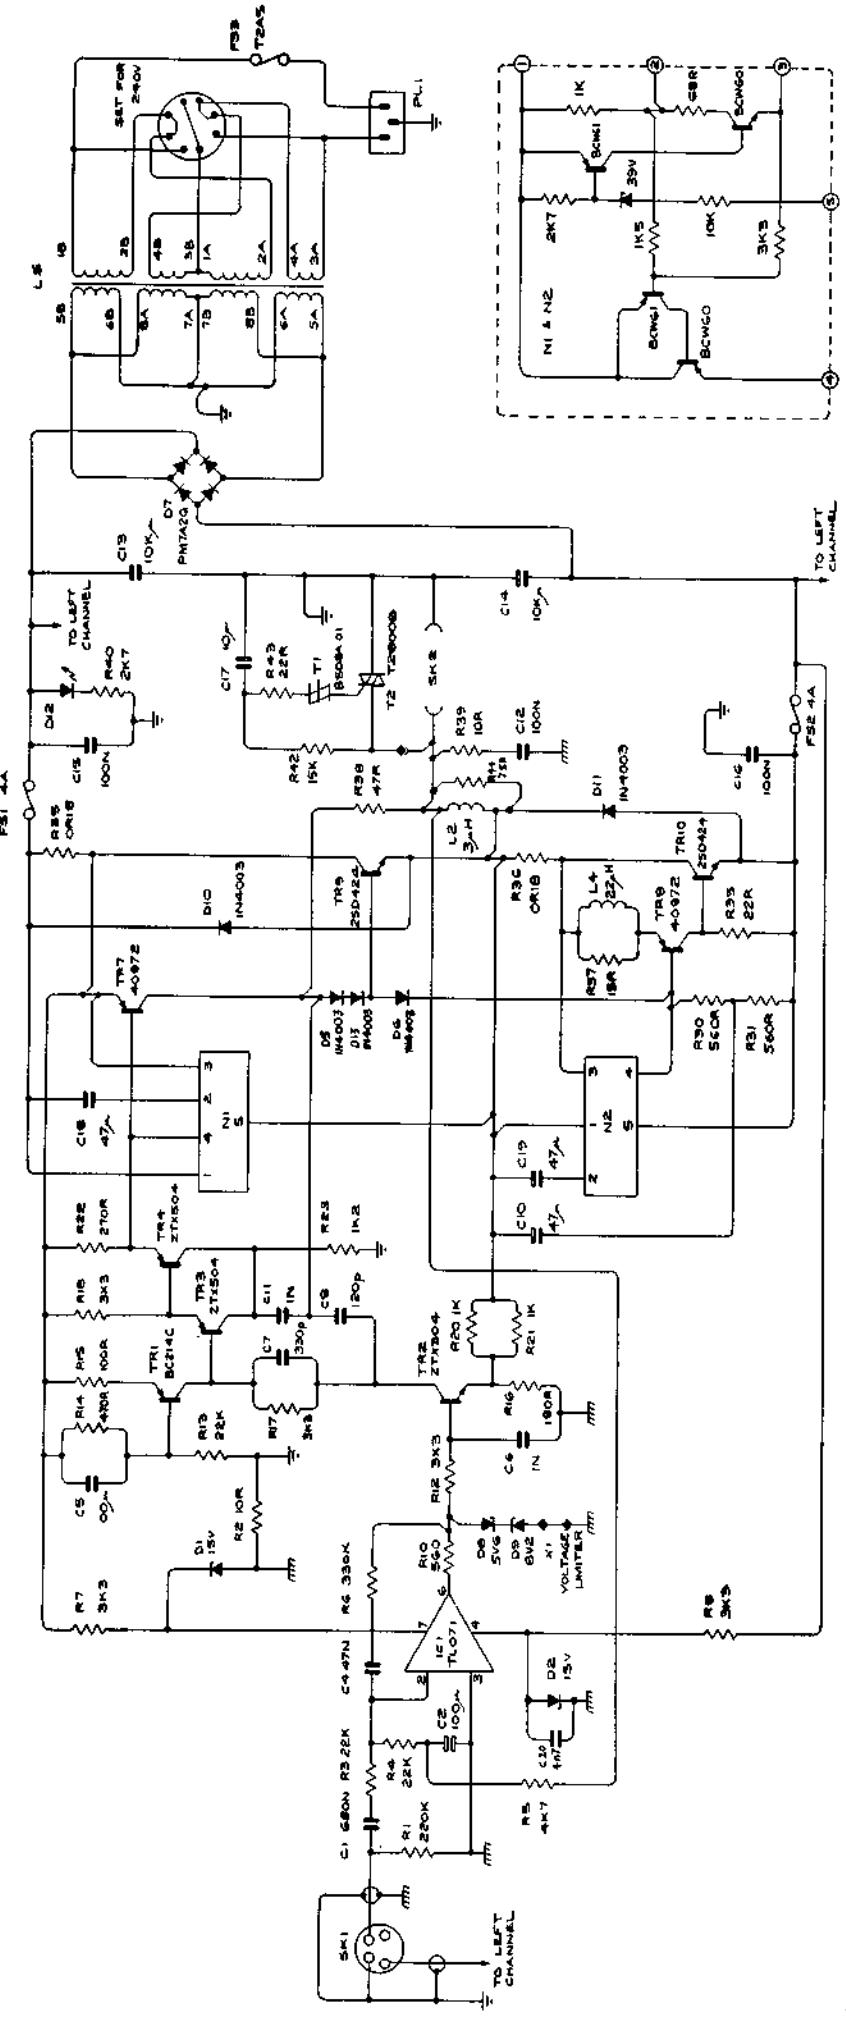

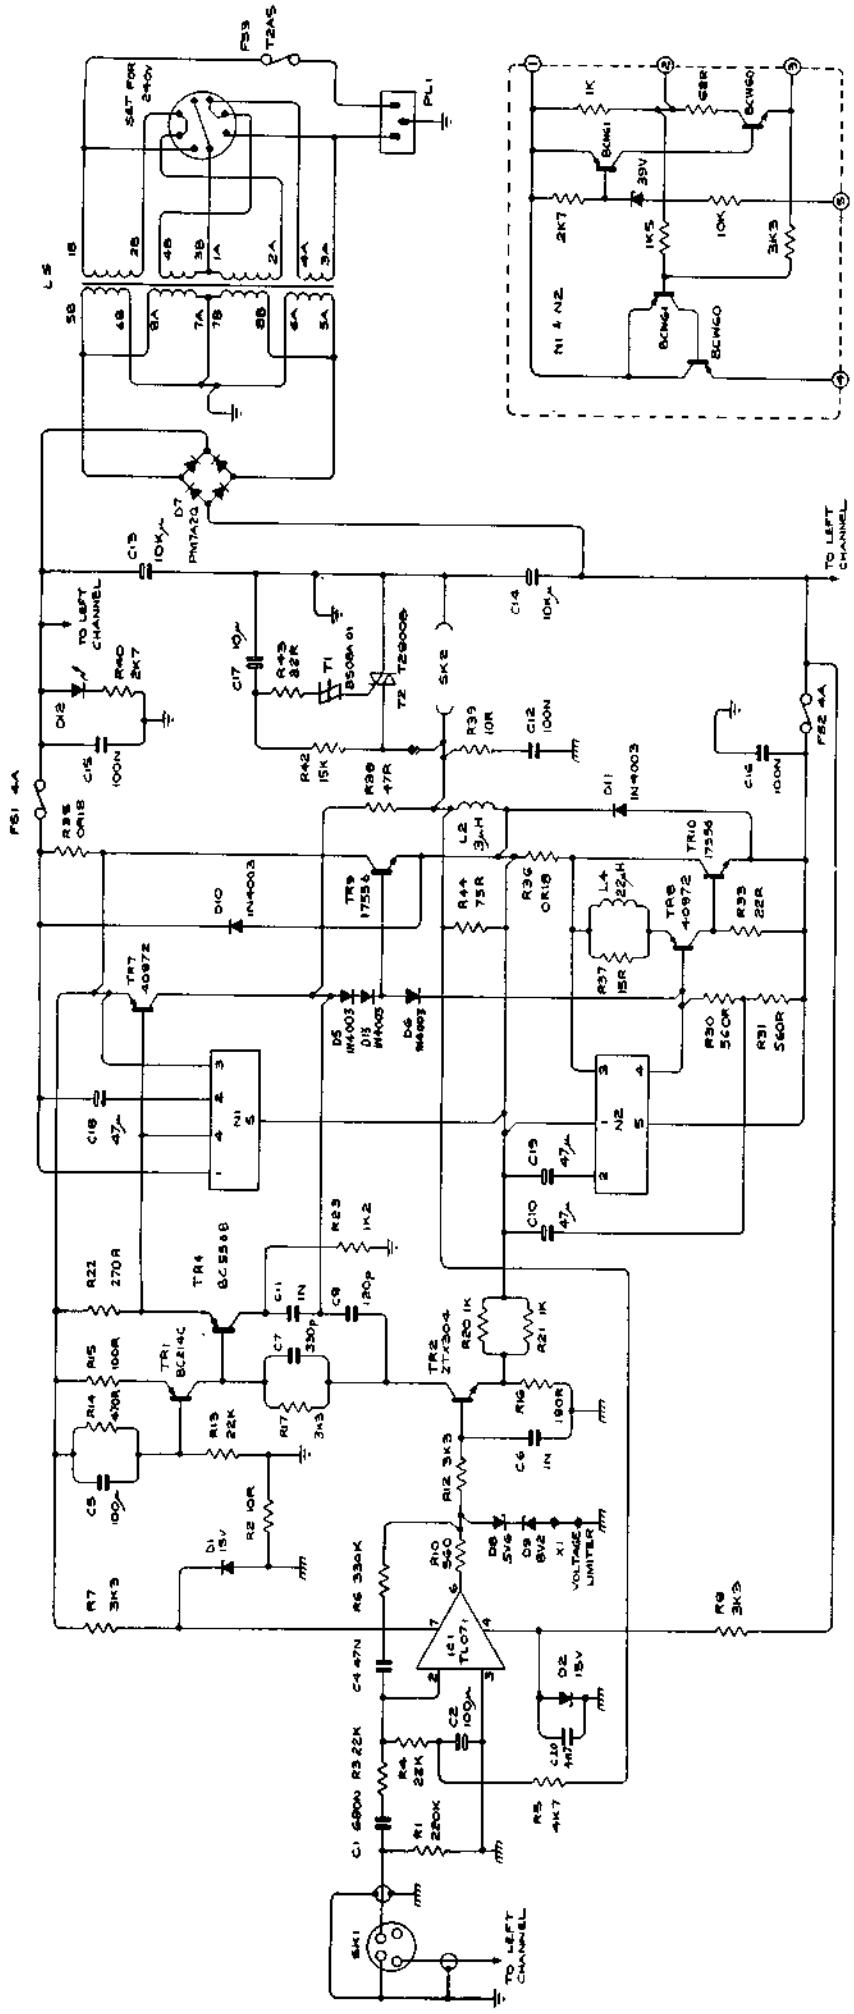

VOLTAGE SELECTION BY  
PRIMARY LINES (REAR VIEW)

