


SCHEMA ELETTRICO

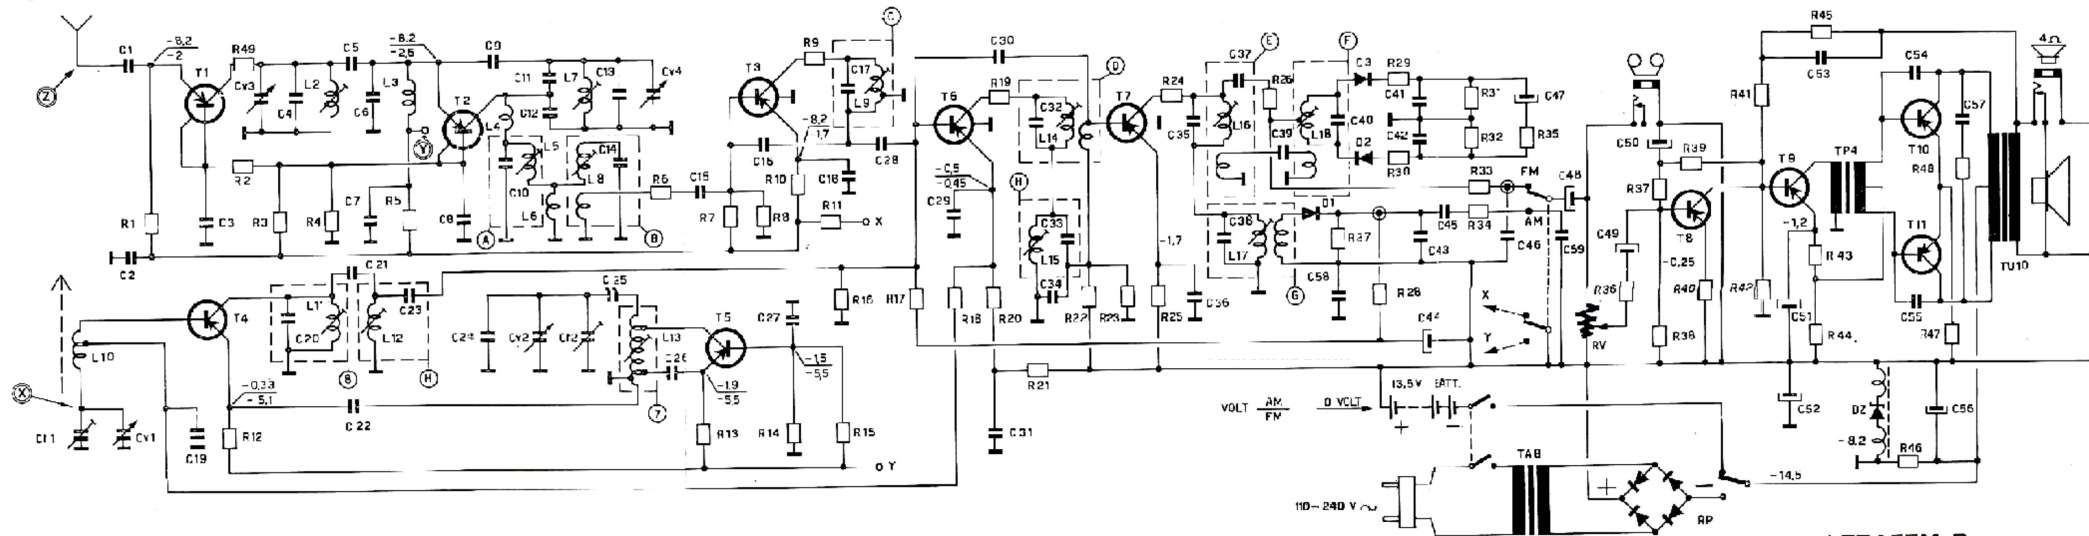

mod. TRAFEM-B

DIS. n° RD 956

dib. *[signature]*
publ. *[signature]*

COMPONENTI

CONDENSATORI

C 1	470/1000	pF
C 2	50	nF
C 3	470/1000	pF
C 4	18	pF
C 5	2,2	pF
C 6	22	pF
C 7	680	pF
C 8	470/1000	pF
C 9	4,7	pF
C 10	120	pF
C 11	10	pF
C 12	10	pF
C 13	15	pF
C 14	120	pF
C 15	470/1000	pF
C 16	8,2/10	pF
C 17	120	pF
C 18	4,7	nF
C 19	50	nF
C 20	2	nF
C 21	12	pF
C 22	50	nF
C 23	1	nF
C 24	12	pF
C 25	300	pF
C 26	10	nF
C 27	50	nF
C 28	68	nF
C 29	50	nF
C 30	8,2/10	pF
C 31	50	nF
C 32	120	pF
C 33	1	nF
C 34	68	nF
C 35	120	pF
C 36	50	nF
C 37	22	pF
C 38	2	nF
C 39	120	pF
C 40	75	pF
C 41	470/1000	pF
C 42	470/1000	pF
C 43	10	nF
C 44	5	μF
C 45	22	nF
C 46	4,7	nF
C 47	5	μF
C 48	1	μF
C 49	1	μF
C 50	10	μF
C 51	100	μF
C 52	1000	μF
C 53	4,7	nF
C 54	4,7	nF
C 55	4,7	nF
C 56	1000	μF
C 57	100	nF
C 58	22	nF
C 59	1,2	nF


RESISTENZE

R 1	680	Ω
R 2	4,7	KΩ
R 3	2,2	KΩ
R 4	5,6	KΩ
R 5	1,2	KΩ
R 6	39	Ω
R 7	4,7	KΩ
R 8	18	KΩ
R 9	220	Ω
R 10	1	KΩ
R 11	100	Ω
R 12	820	Ω
R 13	1,5	KΩ
R 14	22	KΩ
R 15	4,7	KΩ
R 16	68	KΩ
R 17	4,7	KΩ
R 18	3,3	KΩ
R 19	1000	Ω
R 20	680	Ω
R 21	100	Ω
R 22	15	KΩ
R 23	47	KΩ
R 24	680	Ω
R 25	1	KΩ
R 26	820	Ω
R 27	3,9	KΩ
R 28	8,2	KΩ
R 29	680	Ω
R 30	680	Ω
R 31	15	KΩ
R 32	15	KΩ
R 33	8,2	KΩ
R 34	5,6	KΩ
R 35	3,9	KΩ
R 36	1	KΩ
R 37	33	KΩ
R 38	33	KΩ
R 39	33	KΩ
R 40	100	Ω
R 41	150	KΩ
R 42	8,2	KΩ
R 43	470	Ω
R 44	68	Ω
R 45	220	KΩ
R 46	270	Ω
R 47	3,3	Ω
R 48	1	KΩ
R 49	100	Ω
RV	10	KΩ

● 8,2 pF con transistor AF 126
10 pF con transistor SFT 316

★ 10 KΩ con transistor AC 151
33 KΩ con transistor SFT 337

SCHEMA DI CABLAGGIO

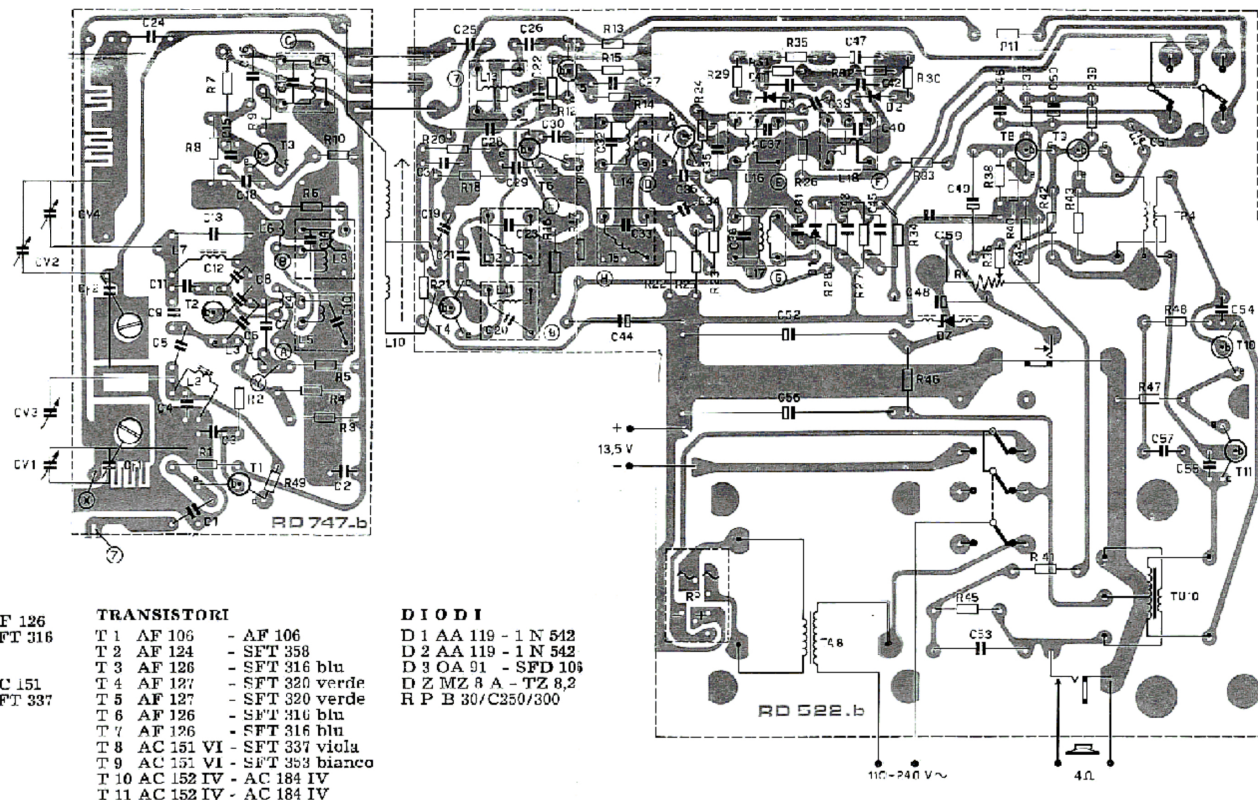

TRANSISTORI

T 1	AF 106	- AF 106
T 2	AF 124	- SFT 358
T 3	AF 126	- SFT 316 blu
T 4	AF 127	- SFT 320 verde
T 5	AF 127	- SFT 320 verde
T 6	AF 126	- SFT 316 blu
T 7	AF 126	- SFT 316 blu
T 8	AC 151 VI	- SFT 337 viola
T 9	AC 151 VI	- SFT 353 bianco
T 10	AC 152 IV	- AC 184 IV
T 11	AC 152 IV	- AC 184 IV

DIODI

D 1	AA 119	- 1N 542
D 2	AA 119	- 1N 542
D 3	OA 91	- SFD 105
D Z	MZ 8 A	- TZ 8,2
R P	B 30/C250/300	