


BE 262-U

15 - 51 m.

9766 X - 5 Ω

185 - 580 m.

110 - 127 V.

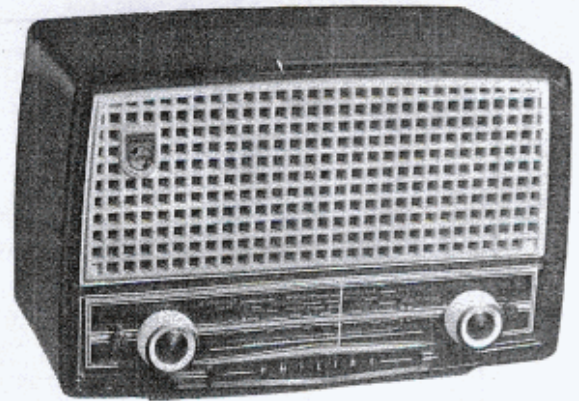

185 - 580 m	A	15 - 51 m.	B
C3, C4 mín. 470 Kc/s, 32000 pF, g1-V1 S8, S7, S5, S6 S7 máx.		C3, C4 mín. 6,1 Mc/s - Y S4, S2 máx. 20,3 Mc/s - Y C8, C6 máx. 185 - 580 m. 558 Kc/s - Y S14, S12 máx. 1630 Kc/s - Y C23, C22 máx.	


VALVULAS	
TIPO	POSICION
HCH-81	V - 1
HF-93	V - 2
HBC-90	V - 3
HL-94	V - 4
HY-90	V - 5
7994 N-00	L - 1 (piloto)

	V1		V2	V3	V4	
	HCH 81		HF-93	HBC-90	HL-94	
	Hexodo	Triodo				
Vf	12,6		12,6	12,6	30	Volts.
Va	102	70	102	34	110	Volts.
Vg2+4	51		51		95	Volts.
- Vg	0,8		0,8		7,2	Volts.
Ia	1,3	2,1	4,4	0,25	36	m.A.
Ig 2+4	3,5		1,8		2,4	m.A.

C 1	50 μ F	F 5008	R1	1800 Ω	48 557 10/1K8
C 2	50 μ F		R2	47000 Ω	48 555 10/47K
C 3	12-500 pF	ZB 49 001 61	R3	10000 Ω	48 557 10/10K
C 4	12 500 pF		R4	2,2 MΩ	48 556 10/2M2
C 5	1000 pF	48 757 20/1K	R5	0,05 MΩ	F 6020
C 6	25 pF	49 005 49	R6	0,45 MΩ	
C 7	47000 pF	48 750 20/47K	R7	4,7 MΩ	48 555 10/4M7
C 8	30 pF	28 212 36	R8	0,22 MΩ	48 556 10/220K
C 9	480 pF	48 429 01/480E	R9	0,68 MΩ	48 555 10/680K
C 10	110 pF	1° Bob. F. I.	R10	180 Ω	48 557 10/180E
C 11	195 pF		R13	50 Ω	48 558 10/50E
C 12	82000 pF	48 751 20/82K	R14	15000 Ω	48 557 10/15K
C 13	110 pF	2° Bob. F. I.	R16	47000 Ω	48 555 10/47K
C 14	195 pF				
C 15	100 pF	48 203 20/100E			
C 16	2700 pF	48 751 20/2K7			
C 17	10000 pF	48 751 20/10K			
C 18	10000 pF	48 757 20/10K			
C 19	22000 pF	48 757 20/22K			
C 20	220 pF	48 203 20/220E			
C 21	39 pF	48 203 10/39E			
C 22	25 pF	49 005 49			
C 23	30 pF	28 212 36			
C 24	56 pF	48 203 20/56E			
C 25	100 pF	48 203 20/100E			
C 26	56 pF	48 203 02/56E			
S1, S2	ZB A3 125 27				
S11, S12	ZB A3 125 35				
S3, S3a, S4	ZB A3 125 57				
S13, S14	F 3298				
S5, S6, C10, C11	ZB A3 126 98				
S7, S8, C13, C14	ZB A3 126 98				
S9, S10	F 2679				

1	2X
2	1X
3	
4	
5	2X
6	1T
7	
8	
9	1X
10	1X
11	
12	
13	
14	
15	
16	1X
17	1X
18	
19	
20	

6:	1. 11. 2. 12.	30. 3. 4. 13. 14.	5. 8.	7. 9.	9. 10. 15.
C:	5. 24. 7. 6. 22. 3	19. 21	25. 1	9. 2. 20. 8. 23. 4. 10.	11. 12. 13. 25. 14. 15. 16.
R:	13.	2.	1.	3. 4	16. 6. 5. 7
					8. 9. 10

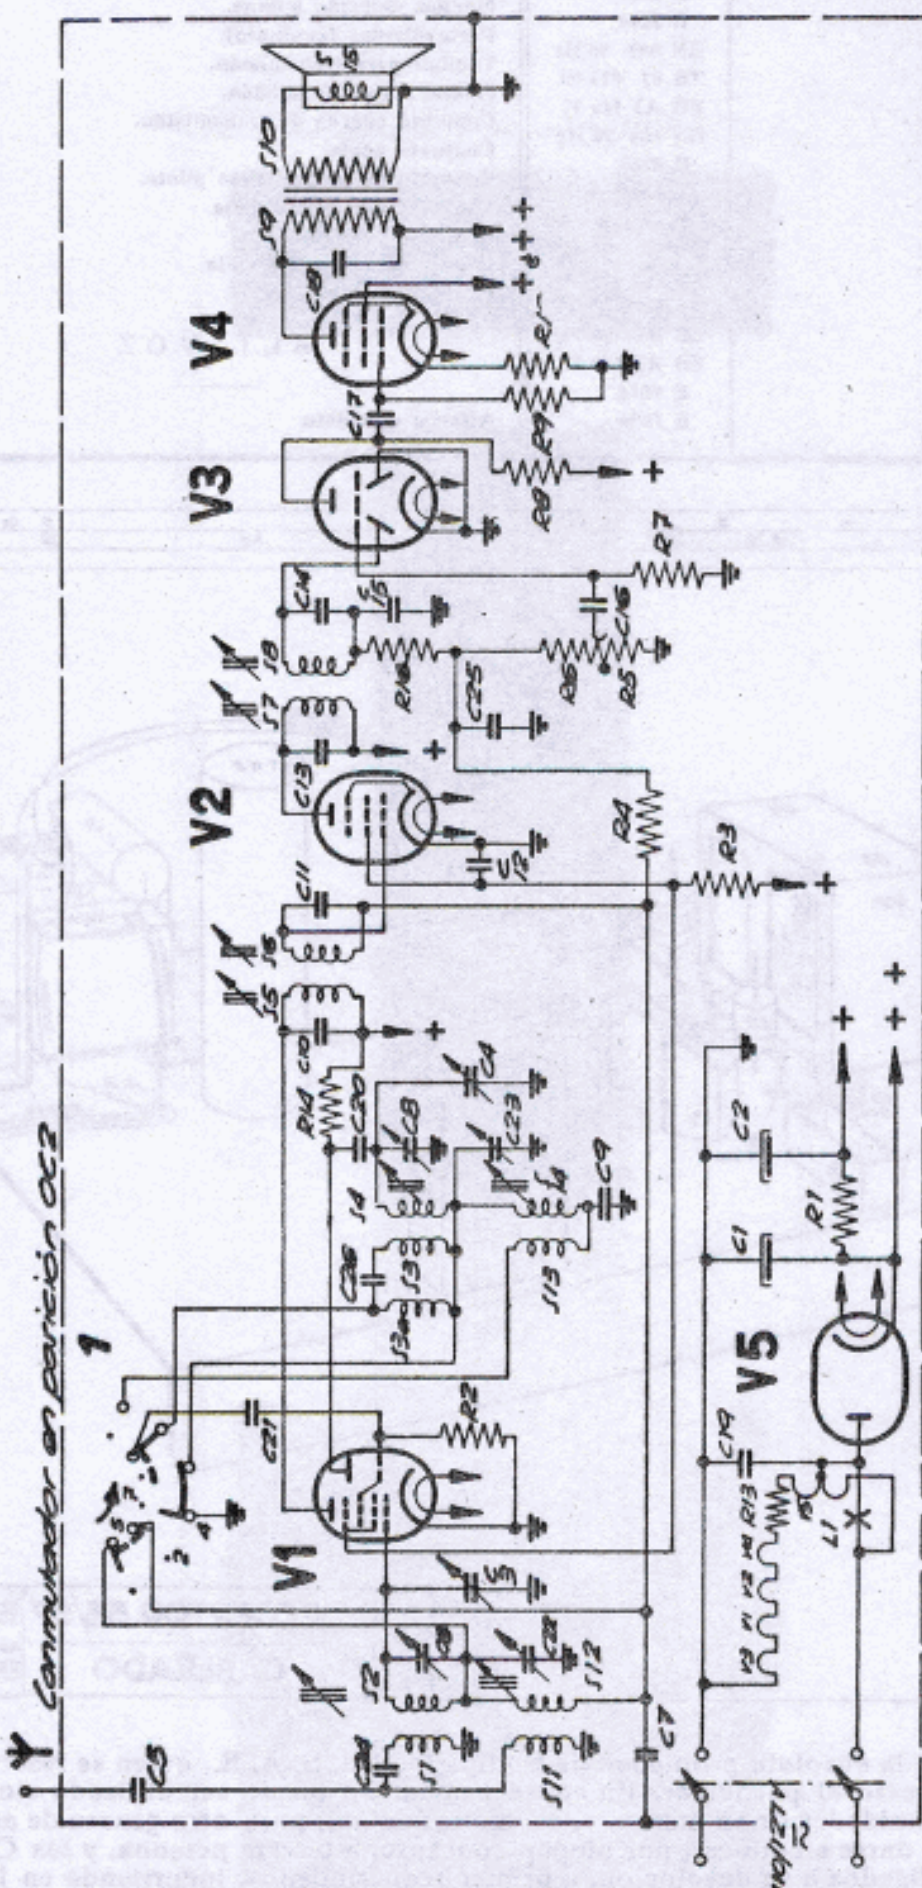

RECEPTOR 56/57
ESQUEMA

BE-262-U
HOJA 21
FECHA 10-9-55
DIBUJANTE *Dezner*
SUSTITUTE A.

30-9-55
5-11-55

F