


SONY

T R - 8 6

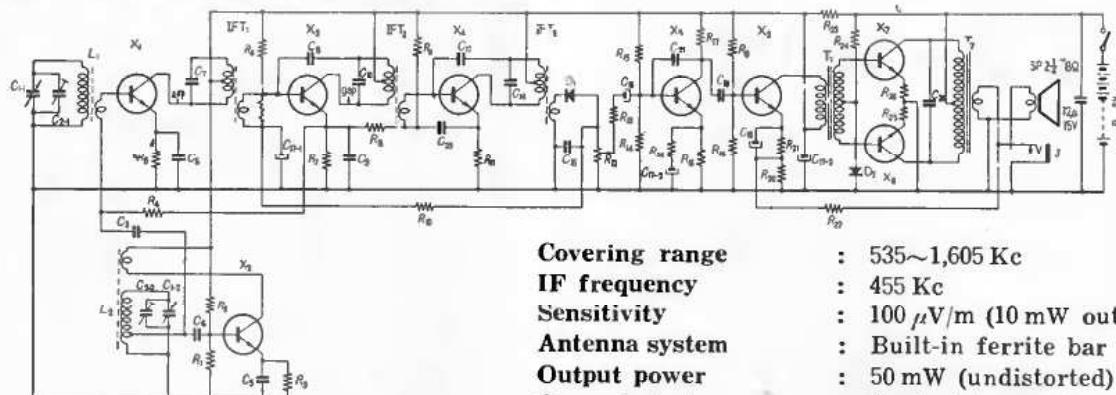

Covering range	: 535~1,605 Kc
IF frequency	: 455 Kc
Sensitivity	: 100 μ V/m (10 mW output)
Antenna system	: Built-in ferrite bar antenna
Output power	: 50 mW (undistorted)
Current drain	: 8 mA (at zero signal)
Speaker	: 2 1/4" PM dynamic speaker 8 Ω


Parts list for TR-86

Symbol	Description	Symbol	Description
L ₁	Antenna coil	R ₂₆	22 Ω " "
L ₂	LA-033-LE	R ₂₇ ①	33 K Ω " "
	Oscillator coil	R ₂₈	270 Ω " 20%
LO-002-Q		C ₁₋₁ , 1-2	Variable condenser
IFT ₁	LI-008-AP	C ₂₋₁ , 2-2	CV-007-02
IFT ₂	LI-008-BP	C ₃	0.005 μ F
IFT ₃	LI-008-CP	C ₄	0.01 μ F
T ₁	TI-002-03	C ₅	0.005 μ F
T ₂	TX-002-03	C ₆	0.01 μ F
SP	2 1/4" 8 Ω	C ₇	180 PF
	DS-004-1	C ₈	2 PF
J	Earphone jack	C ₉ ②	30 μ F 3 V
R ₁	10 K Ω 1/4 W 20%	C ₁₀	180 μ F
R ₂	56 K Ω " "	C ₁₂	2 PF
R ₃	2.2 K Ω " "	C ₁₄	180 PF
R ₄	2.2 K Ω " "	C ₁₅	0.02 μ F
R ₅ ①	820 Ω " 10%	C ₁₆ ③	5 μ F 6 V
R ₆	82 K Ω " 20%	C ₁₇ ③	20 μ F 10 V 3 in block
R ₇	470 Ω " "	C ₁₈ ③	5 μ F 6 V
R ₈	820 Ω " "	C ₁₉ ③	30 μ F 3 V
R ₉	18 K Ω " "	C ₂₀	0.05 μ F
R ₁₀	7.5 K Ω " "	C ₂₁	0.001 μ F
R ₁₁	470 Ω " "	C ₂₂	0.01 μ F
R ₁₂ ②	5 K Ω (RV-234)	X ₁	Mixer 2 T7 (2SC76)
R ₁₃	1.5 K Ω 1/4 W 20%	X ₂	Oscillator 2 T7 (2SC73)
R ₁₄	10 K Ω 1/4 W 20%	X ₃	IF 2 T7 (2SC76)
R ₁₅	56 K Ω " "	X ₄	IF 2 T7 (2SC76)
R ₁₆	820 Ω " "	X ₅	Audio 2 T6 (2SD66)
R ₁₇	2.2 K Ω " "	X ₆	Audio 2 T6 (2SD66)
R ₁₈	10 K Ω " "	X ₇ , X ₈	Power stage 2 T6 (2SD65)
R ₁₉	56 K Ω " "	D ₁	Detector 1 T23
R ₂₀	5 Ω " 10%	D ₂	Varistor 1 T52
R ₂₁	680 Ω " 20%		
R ₂₂	220 Ω " "		
R ₂₃	220 Ω " "		
R ₂₄	5.6 k Ω " "		
R ₂₅	22 Ω " 10%		

① To be adjusted.

② With switch.

③ Electrolytic.

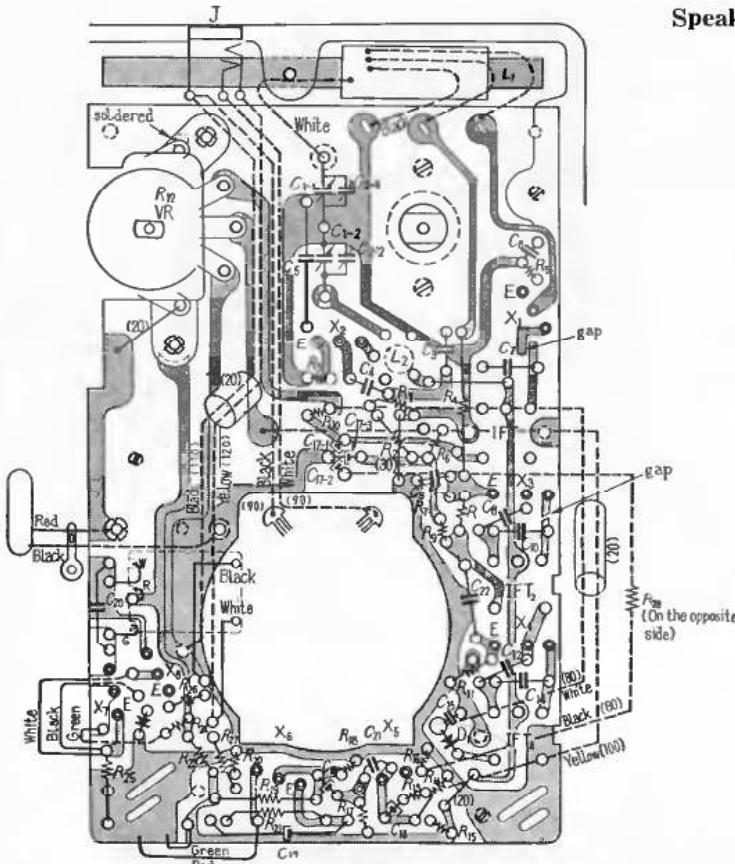

Circuit board of TR-86 (Printed side)

Audio Transformer

Input transformer TI-002

6 K Ω : 3 K Ω

DC resistance 500 Ω : 280 Ω

Output transformer TX-002

1.4 K Ω : 8 Ω

DC resistance 100 Ω : 0.5 Ω