


de

THE SOUND ENGINEERING MAGAZINE

AUGUST / SEPTEMBER 1972 \$1.00



CHIEF ENGINEER
IN ST
450

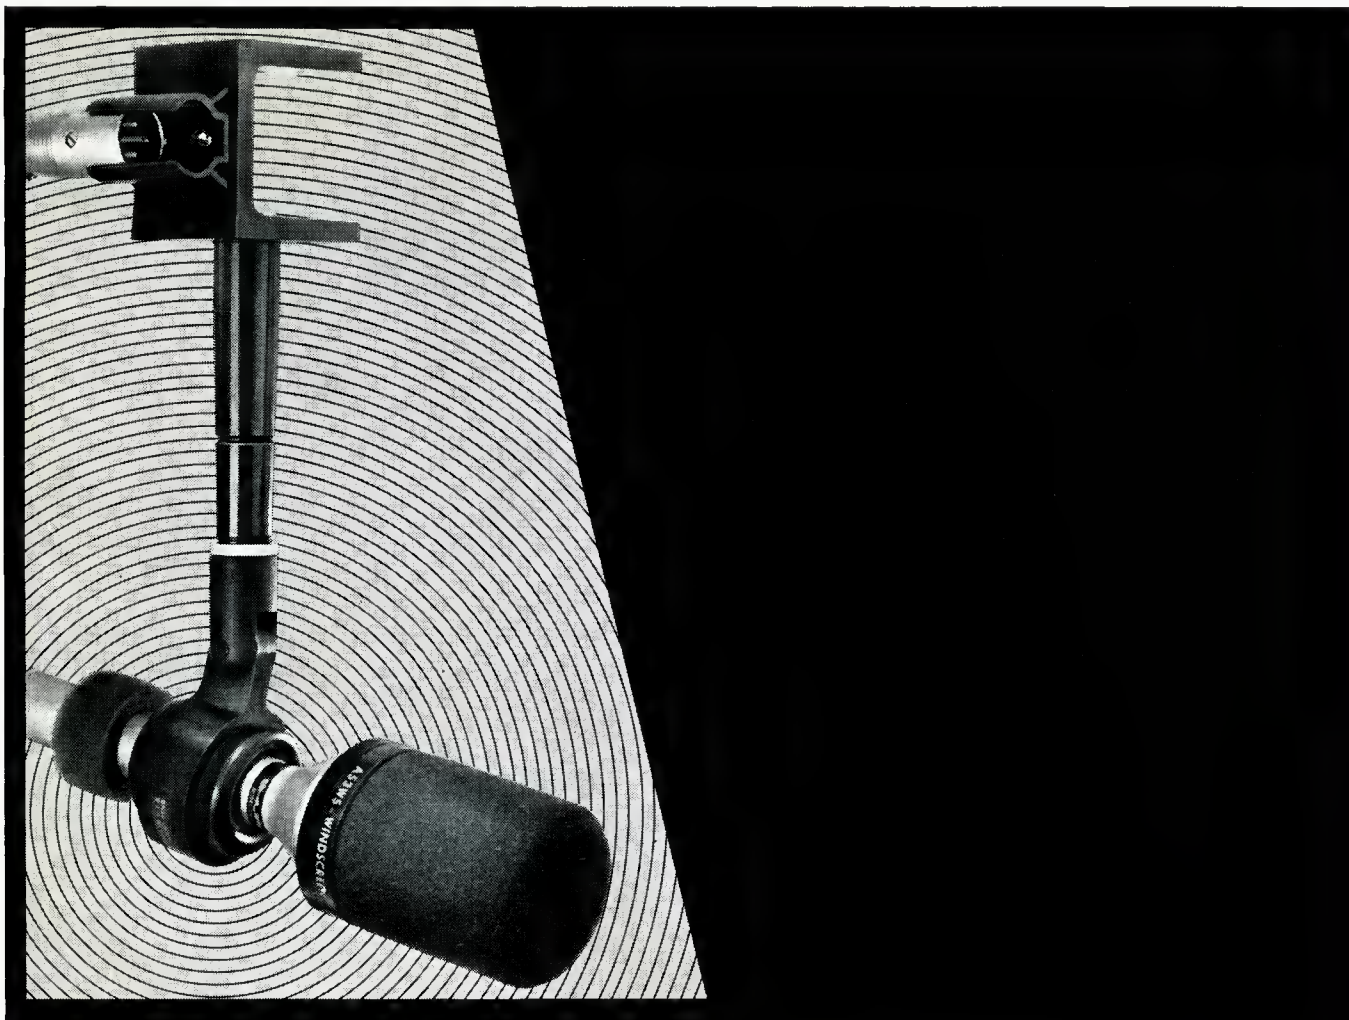

Boom Boon.



We've taken our most versatile, best-performing unidirectional studio microphone, the *Shure SM53*, and made it even more versatile by developing a complete boom accessory system that equips the SM53 for every conceivable boom and "fish-pole" application! Shure design engineers started with a major breakthrough in design: a small, lightweight, extremely effective isolation mount. They developed a super-flexible isolation cable, a pair of highly-efficient front-and-rear windscreens, and a 20" boom extension pipe. Finally, they developed a complete boom assembly that combines unusually small size with superb control and noise isolation. Result: an accessory lineup that makes every Shure SM53 studio microphone a complete microphone system! Write:

Shure Brothers Inc.,
222 Hartrey Ave., Evanston, Ill. 60204.



SHURE


Circle 10 on Reader Service Card

SPECIAL NOTICE

● It's easy enough to see that this is a big, big issue. The biggest one we have yet published, in fact. You will also notice that this is a combined August-September issue. We decided to combine the August and September issues into one grand one for two reasons. One is—it is a grand thing to do. But the compelling one was the devastating floods that happened earlier this summer in Harrisburg, Pennsylvania. Harrisburg is the location of our printer. He had up to four feet of water in his press room at the crest of the floods. He might have been back in operation four days later if it were up to him, but the utility company could not turn on the gas supply (vital to press operation) for several days more. The resultant delays forced our June issue to be extremely late and pushed back the issues to follow accordingly. We could not have caught up in time for the AES Convention without this combined issue.

ABOUT THE COVER

● Digital Equipment Corporation is again the supplier of our cover (they were on April's cover). One of their small computers is about to be inserted into a Neve console—highlighting the fact that this issue has several articles dealing with the subject of automation in audio. They begin on page 38.



THE SOUND ENGINEERING MAGAZINE

AUGUST-SEPTEMBER 1972 VOLUME 6, NUMBER 8


- | | |
|----|---|
| 38 | HOW ABOUT SOME AUTOMATION?
Joseph Marrone |
| 42 | AUTOMATIC TAPE TRANSPORT CONTROL
Richard Factor and Stephen Katz |
| 46 | AUTOMATING THE AUDIO CONTROL
FUNCTION, PART 3
Walter Jung |
| 54 | A WIDE DYNAMIC RANGE NOISE-REDUCTION
SYSTEM
David Blackmer |
| 58 | db VISITS—AUTOMATED PROCESSES |
| 62 | GUIDE AND MAPS—AES CONVENTION |
| 4 | LETTERS |
| 10 | THE AUDIO ENGINEER'S HANDBOOK
George Alexandrovich |
| 14 | THEORY AND PRACTICE
Norman H. Crowhurst |
| 20 | THE SYNC TRACK
John Woram |
| 26 | SOUND WITH IMAGES
Martin Dickstein |
| 31 | NEW PRODUCTS AND SERVICES |
| 64 | BOOKCASE |
| 65 | CLASSIFIED |
| 66 | PEOPLE, PLACES, HAPPENINGS |

db is listed in Current Contents: Engineering and Technology,

Robert Bach PUBLISHER	Larry Zide EDITOR
Bob Laurie ART DIRECTOR	John Woram ASSOCIATE EDITOR
A. F. Gordon CIRCULATION MANAGER	Marilyn Gold COPY EDITOR
Eloise Beach ASST. CIRCULATION MGR.	Richard L. Lerner ASSISTANT EDITOR
GRAPHICS Crescent Art Service	

db, the Sound Engineering Magazine is published monthly by Sagamore Publishing Company, Inc. Entire contents copyright © 1972 by Sagamore Publishing Co., Inc., 980 Old Country Road, Plainview, L.I., N.Y. 11803. Telephone (516) 433 6530. db is published for those individuals and firms in professional audio-recording, broadcast, audio-visual, sound reinforcement, consultants, video recording, film sound, etc. Application should be made on the subscription form in the rear of each issue. Subscriptions are \$6.00 per year (\$7.00 per year outside U. S. Possessions, Canada, and Mexico) in U. S. funds. Single copies are \$1.00 each. Controlled Circulation postage paid at Harrisburg, Pa. 17105. Editorial, Publishing, and Sales Offices: 980 Old Country Road, Plainview, New York 11803. Postmaster: Form 3579 should be sent to above address.

One of a series of brief discussions
by Electro-Voice engineers

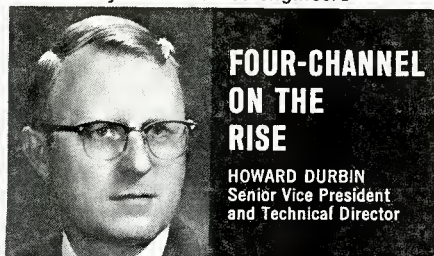

FOUR-CHANNEL ON THE RISE

HOWARD DURBIN
Senior Vice President
and Technical Director

With a variety of encoding techniques now available, either as records you can play directly, or encoders you can use to convert original 4-channel material to matrixed stereo, what is the effect on the listener who has selected a specific decoder for his 4-channel system?

In most cases he will hear a perfectly satisfactory performance, albeit in some cases slightly different from the specific locations intended by the recording engineer. But even this variation is now being reduced with the introduction of the new Electro-Voice "universal" decoder. This IC circuit is available in a separate decoder, in a receiver, and as an element for other manufacturers to include in either component or packaged stereo equipment. It decodes any of the known matrices with remarkable accuracy and without the need to change switches or settings on the part of the listener.

It is expected that in the near future the industry will settle on a recommended "standard" for matrix decoding. However for many recording engineers this standard will simply be a starting point for variation, much as the RIAA curve is really just a reference standard rather than a firm rule to be followed.

For this reason our four-channel encoder, Model 7445, so widely used by FM stations and recording studios, will soon have several encodings selectable by the engineer. This permits favoring the left-right spread, or front-back separation depending on the needs of the program. Means to up-date E-V encoders now in the field will be available.

One other factor concerns many FM broadcasters today. It is the announcement of so-called "discrete" discs. It seems likely that the FCC will require revisions of present FM broadcast standards before any "discrete" broadcast technique is permitted on other than an experimental basis. Even so, "discrete" discs can be played (as stereo records) without broadcasting the directional information on the disc's subchannels. And a listener with a matrix decoder can reconstruct an interesting 4-channel effect, just as he now "enhances" stereo records you presently play.

While some of the directional effects may be reduced, none of the music is lost with this technique. And it has been proposed that even "discrete" discs employ matrixing of the main channels so that either matrix or discrete modulators can be used to play the same record. Thus the record would be truly compatible for all forms of playback equipment, including matrix FM stereo broadcasting.

Software for programming of 4-channel is continuing to increase in availability. And 4-channel hardware is expected to arrive in mass quantities this year. While stereo will remain with us for years, much as mono has survived, it is probable that 4-channel FM will soon become the rule rather than the exception.

For further information on 4-channel stereo,
or technical data on any E-V product, write:
ELECTRO-VOICE, INC., Dept. 823BD
686 Cecil St., Buchanan, Michigan 49107



advertisers index

AKG	12
Allison	6
Altec	52, 53
Acoustic Research	27
Audiomatic	23
Automated Processes	7
Auditronics	45
Crown	15
Custom Fidelity	17
Dolby Labs	3
Electro-Voice	2, Cover 4
Eventide Clockworks	28, 30
Fairchild Sound	33, 34
Gately	31
Gotham Audio	4, 14, 22
Infonics	41
Int. Telecomm	18
Koss	facing Cover 2
MCI	24, 25
Miller-Stephenson	59
Olive	49
Pentagon	51
Phase Linear	20
ReVox	57
Sansui	60, 61
Shure	Cover 2, 19
Sony Corp.	13
Soundcraftsmen	16
Spectra Sonics	37
Stanton Magnetics	10
Tascam	11
Telex	9
Timekeeper	28, 29
Turner	21
UREI	8, 16
Waters	5
Windjammer	56



THE SOUND ENGINEERING MAGAZINE

SALES OFFICES

New York
980 Old Country Road
Plainview, N.Y. 11803
516-433-6530

Dallas
Roy McDonald Associates, Inc.
Semmons Tower West
Suite 714
Dallas, Texas 75207
214-637-2444

Denver
Roy McDonald Associates, Inc.
846 Lincoln Street
Denver, Colorado 80203
303-825-3325

Houston
Roy McDonald Associates, Inc.
3130 Southwest Freeway
Houston, Texas 77006
713-529-6711


Los Angeles
Roy McDonald Associates, Inc.
1313 West 8th Street
Los Angeles, California 90018
213-483-1304

Portland
Roy McDonald Associates, Inc.
2305 S. W. 58th Avenue
Portland, Oregon 97221
503-292-8521

San Francisco
Roy McDonald Associates, Inc.
625 Market Street
San Francisco, California 94105
415-397-5377

New from Dolby

The M16: a compact sixteen-track noise reduction unit

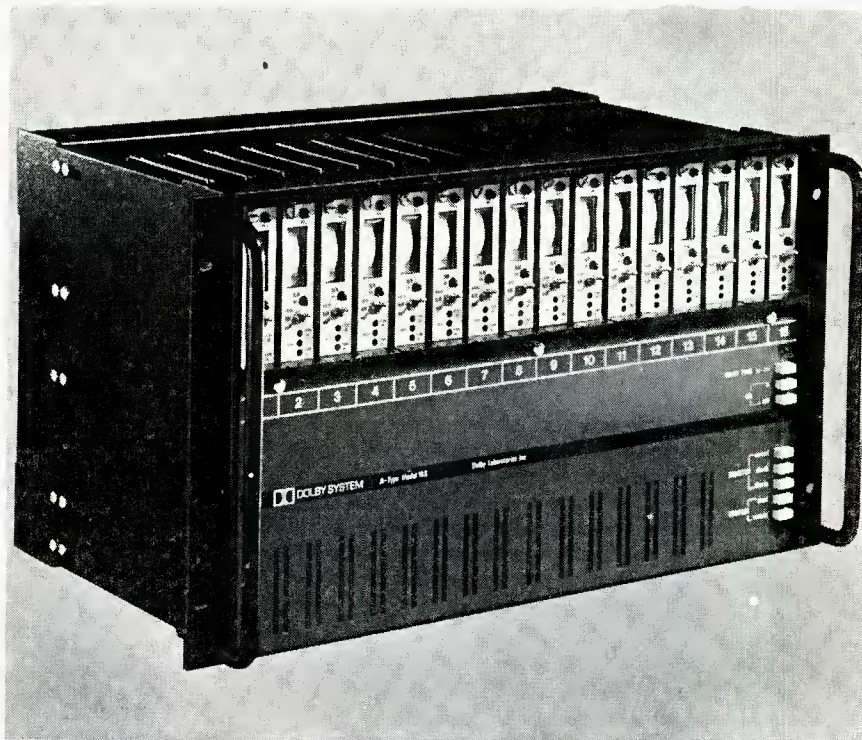

New monitoring facilities in record, play, and recorder rest modes.

All solid-state control logic and signal switching.

Simple remote operation of all functions from console and recorder.

Standard Dolby A-type noise reduction characteristics.

New, simplified line-up procedure.

Complete self-contained power supply and interface circuitry.

Add-on A8X provides simple expansion to 24-track operation.

Only \$8,000 for full sixteen-track capability.

The Dolby system has become an integral part of modern multi-track professional recording practice. A new unit, the M16, has been developed for these applications and is now in production.



Dolby Laboratories Inc

1133 Avenue of the Americas
New York NY 10036
Telephone (212) 489-6652

346 Clapham Road, London SW9
Telephone 01-720 1111

Tiger Building 30-7 4-Chome Kuramae
Taito-Ku Tokyo
Telephone 03-861-5371

In addition to the obvious economy of space, installation time, and maintenance which the M16 offers, its cost per channel is substantially lower than that of other Dolby noise reduction units.


Full information about the M16, including accessories, auxiliary and independent eight-track units, and prices, available upon request.

'Dolby' and the double-D symbol are trade marks of Dolby Laboratories Inc.

Circle 15 on Reader Service Card

www.americanradiohistory.com

Son of U47

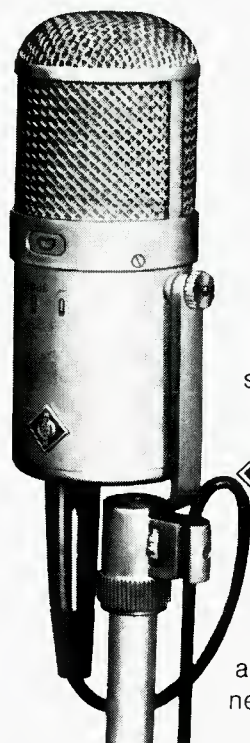

It looks a lot like the old man.
What a mike he was. What presence. What a shame he had to go.
From 1947 to 1960, the U 47 revolutionized the recording and broadcasting industries.
And now his kid has arrived on the scene. The U 47 fet.

Its subjective quality is unchanged, because its head enclosure is just as it was twenty-five years ago. (You see, it's primarily the shape of the grille that gives a microphone its unique sound, and the demand for the U 47's distinctive sound has never slackened.)

What's new about the U 47 fet? Everything that 1972's state-of-the-art makes possible—op amps and all! It is protected against wind and pop interference. Its capsule is elastically mounted to isolate it from mechanical shock disturbances.

The U 47 fet features both a 10 dB overload protection switch at the input of its internal electronics and a 6 dB switchable output pad to permit matching to highly sensitive microphone input circuits. A low-frequency roll-off is provided by a third switch. It goes without saying that the U 47 fet features compatible "Phantom"® powering. But it's hard to believe that it has a dynamic range of 136 dB, as compared to the old man's 86 dB. That's 50 dB wider!

The result: a great new microphone that adds lustre to a great old reputation.

The old man would have been proud.

For additional information, call or write:

GOTHAM
AUDIO CORPORATION

2 West 46th Street, New York, NY 10036 (212) 265-4111
1710 N. LaBrea Avenue, Hollywood, CA 90046 (213) 874-4444
In Canada: J-Mar Electronics Ltd.

letters

The Editor:

Confusing *phase* with *polarity* seems to be a trait among writers on the subject of audio.

Two loudspeakers can have the same *polarity* regardless of their locations. But two loudspeakers located several feet apart can never be "in phase" except for a listener equidistant from the two speakers.

The late W. B. Snow in his monumental paper of 1953¹ wrote "It is good practice to observe a poling convention throughout all channels, including the microphones and loudspeakers, although the channel spacings are so wide that only very low frequencies can be considered at other than random phase in one channel compared to another."

Note the distinction between *polarity* and *phase*. The *polarity* must be 0 or 180 degrees; for a situation where a listener is 10 feet from one loudspeaker, 15 feet from another, and a frequency of 1000 Hz is being radiated from each, the *phase shift* would be approximately.

$\phi = 5 \times 1.124 \times 2\pi$ radians or more than 2000 degrees

For very high frequencies, moving one's head a matter of a mere 6 inches would cause a *phase shift* of more than 1000 degrees.

All this is material with which readers of *db* are well aware, but may need to be reminded of occasionally. And it might be well to be reminded to distrust writers who are careless on this subject. They just might be careless on other subjects also.

This writer's early work in stereo involved recordings made with only two microphones. *Polarity* didn't seem to be of prime importance since speakers were 25 feet apart. Introduction of a bridged center speaker didn't alter the fact that *polarity* wasn't critical; the center speaker could accept

1. W. B. Snow, "Basic Principles of Stereophonic Sound", Jour. of Soc. Mot. Pictures and Television Engineers, Vol. 61, No. 11, Nov. 1953, pp. 567-589. The quote is on page 582, Col. 2.

Waters Attenuators

not just a pair, but a full house



Choosing professional audio controls involves complex compromises between noise, life, accuracy, and price. No one design can achieve all the alternatives. To satisfy all requirements, a full range of attenuator models is required, and that's what Waters offers: a complete line of attenuators, all of which feature MystR®—a proprietary conductive plastic resistance element.

MystR's glass-hard, smooth wiping surface achieves noise levels below $20\mu\text{V}$ (at least 100db down) over a trouble-free life of at least ten million operations.

Zero to 90db of truly "stepless" attenuation is achieved with Waters' computer-controlled curve-shaping technique which actually tailors the attenuator resistance element assuring superior tracking accuracy.

If you'd like to call our hand, send for Waters' Audio Attenuator brochure which describes their complete line of linear and rotary attenuators and pan pots. Use the coupon provided, or better yet, phone 617-358-2777 for immediate service.

WATERS MANUFACTURING, INC.

Boston Post Road
Wayland, Ma. 01778

I'd like further information on Waters attenuators and MystR® conductive plastic elements.

- ☐ Send me your attenuator brochure and "The MystR Story"
- ☐ I need additional information:

Name _____

Position _____

Company _____ Phone _____

Street _____ City _____

State _____ Zip _____



~~ALLISON RESEARCH, INC.~~
~~7120 SUNSET BOULEVARD~~
~~HOLLYWOOD, CALIF. 90046~~

~~(017) 874 8016~~

→ we've moved

2817 Erica Place
P.O. Box 40288
Nashville, Tenn. 37204
(615) "ALLISON"

Automated Processes, Inc.
80 Marcus Dr.
Melville, New York 11746

Dear Mr. Processes,

A funny thing happened to us while we were on the way to creating the nifty-neat kind of equipment that audio land looks to Allison Research for. We have created a device that falls into the "MAJOR BREAKTHROUGH" category. WE HAVE MADE AUTOMATED MIXDOWN REALLY POSSIBLE.

You know how everybody wants to make an automated mixdown system, but hasn't discovered how to process and store enough mixing information to create a really complete system? (not just gain, but equalization, echo, panning and the whole bit). Well, our memory processor can.

1. It can process and store as many as 256 separate mixdown functions on a single track of the master tape, a cassette machine or, in fact, anything that has a 5kHz bandwidth and a 35dB signal to noise ratio.
2. It features a 90dB range of highly accurate, infinite resolution control.
3. Fast update speed of 800 microseconds per function (it can scan 128 functions at the rate of 10 times per second).
4. Its failsafe system renders immunity to dropouts, splices or level changes.
5. Simple and trouble free circuitry requiring no alignment tone or tricky adjustments.
6. Separate encoder/decoder which can be built up from as few as 16 to as many as 256 functions, by simply plugging in cards.

Now then, Mr. Processes, why are we telling you all these things? Well, we didn't just happen to find your name in the yellow pages. It happens that we think your company is swell. In short, let's make beautiful automation together. (Call me at (615) "ALLISON")

Love,

Allison

XOXOXOXOX




AUTOMATED PROCESSES, INC.
80 MARCUS DRIVE, MELVILLE, NEW YORK 11746 • 516-894-8212

Dear Allison,

Great! Your memory processor is just what the industry is looking for. Let's get together and create a total AUTOMATED MIXDOWN SYSTEM that will knock the audio world on its ears!

Sincerely,

L. Frederick Lindauer

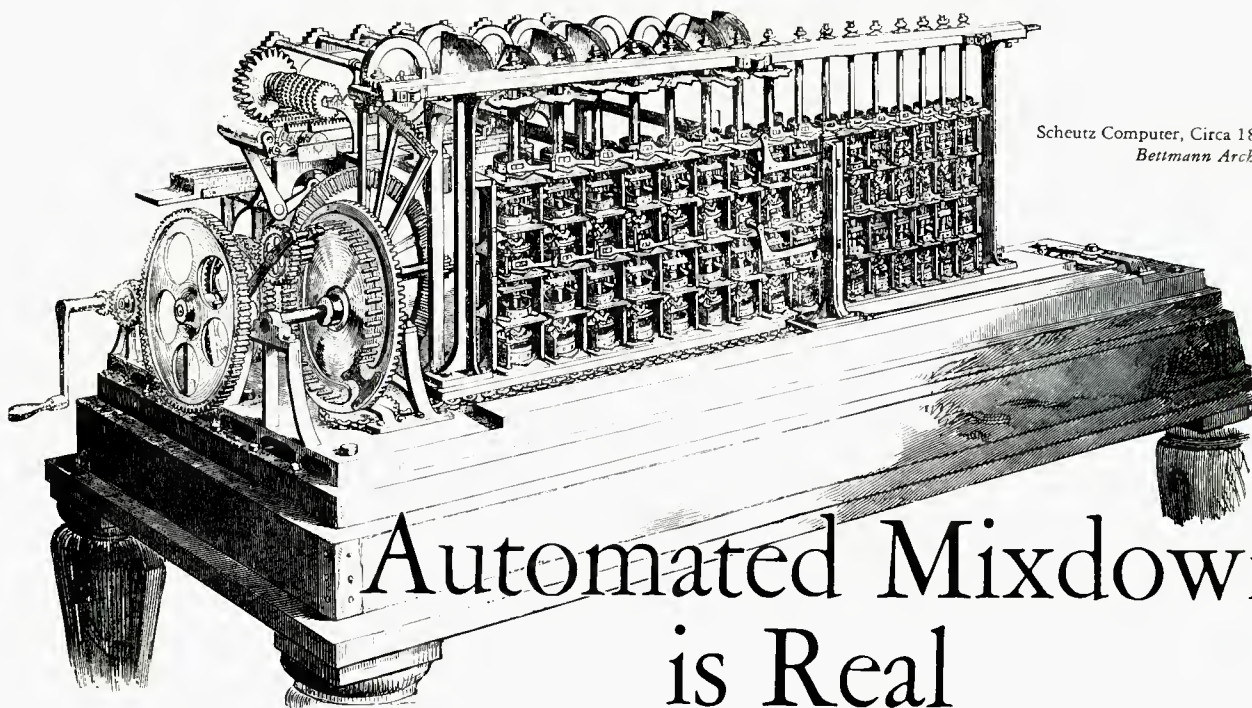

Scheutz Computer, Circa 1855
Bettmann Archive

Automated Mixdown is Real

Automated Processes proudly announces **The Automation System**. The one that's available today, yet is capable of satisfying tomorrow's needs. Capable because we've engineered into it the capacity to automate virtually all mixing functions instead of just a few.

Let's face it, when you get into automation, you won't want to replace your system in a few months or years because of insufficient capacity to store and control all necessary functions.

Here is what we have to offer:

- **256 function capability.** The significance of this will become apparent when you consider the following suggested utilization format:

- Function 1-16, individual channel gain
- Function 17-32, individual channel echo send
- Function 33-48, individual channel stereo panning (left/right)
- Function 49-64, individual channel quad panning (front/rear)
- Function 65-128, individual channel equalization (four functions per channel)
- Function 129-144, master levels, echo returns, etc.
- Function 145-256, 24 track and other future functions

The system may be purchased with as few as 16 or as

many as 256 functions. It is user-expandable in blocks of 16 functions, simply by plugging-in additional cards.

- **Fast update speed of 800 microseconds per function.** This allows rapid changes in mixing parameters. For instance, a 128 function system will update 10 times per second. The updating rate automatically changes to accommodate the number of functions being stored. If you expand the system in the future, it will still automatically accommodate the tapes made before the expansion.


- **Stepless, highly linear control over a 90 dB range.**
Accuracy: ± 2 dB over the first 40 dB
 $+0, -2$ dB from -40 to -60 dB

- **Failsafe circuitry.** This prevents adverse reaction to drop-outs, splices or level changes. Splicing and "punch-in" are possible, as is quasi splicing by switching from one encoded track to another. Internal memory circuits even protect against dropouts in excess of 60 seconds.

- **All encoded information may be contained on one track of the master tape,** or on any other medium capable of a 5 kHz bandwidth and a 35 dB signal-to-noise ratio. Ideal for storage on a cassette, etc.

- **The system and its components is available for retrofit into existing consoles,** as well as for inclusion in new equipment.

This is only the beginning. See us at Booths 40 and 41 at the AES Convention for a live, real-time demonstration, or write for details.




AUTOMATED PROCESSES, INC.
80 MARCUS DRIVE, MELVILLE, NEW YORK 11746 • 516-694-9212

1176 LN limiting amplifier

Cool-aid for hot sounds

Cool and reliable, the 1176 is the Industry's most popular limiter for controlling today's hot sounds. It has ultrafast attack time independent of peak duration or frequency, adjustable from front panel. Release time is also adjustable from front panel. Push button selection of four compression ratios, of 20:1, 12:1, 8:1, or 4:1. It is a compact 19" rack mount size — 3½" high.

Available from better professional audio dealers everywhere or send for complete technical details today!

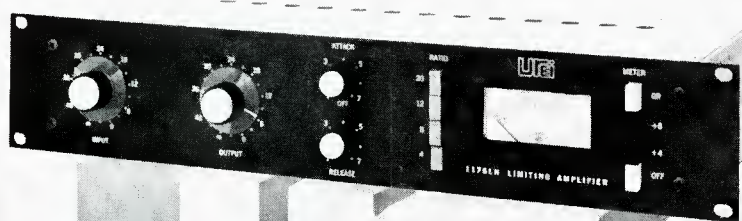

a **Urei** company

11922 Valerio Street, No. Hollywood, California 91605 (213) 764-1500
Exclusive export agent: Gotham Export Corporation, New York

$L + R$ or $L - R$ about equally well. But when a third microphone was used to focus central stage events, thereby adding a strong monophonic component to each stereo channel, polarity of the center speaker had to be $L + R$. If the $L - R$ polarity was used, the soloist almost disappeared; whatever central stage events were to be heard had to be combined in one's hearing system out of what came from the flanking speakers. And it should be remembered that the sounds reaching one's ear from the flanking speakers are in random phase for all but the lowest frequencies. This means that one can not ignore polarity; Snow's remark still holds; one should maintain proper polarity, even if it is impossible to achieve "correct phase."

But remember $L + R$ or $L - R$ is not phase but *polarity*; one can achieve one or the other with a polarity reversal of one or the other channel. Phase is a general concept that includes all phase angles from 0 to 360 degrees and multiples thereof. Polarity has to do with the special case where precisely 180 degrees is introduced.

*Paul W. Klipsch
Klipsch and Associates
Hope, Arkansas*

db binders only \$4.95 postpaid

Heavy-weight binders are now available to hold the thirteen issues of Volumes 1 and 2. Rich brown leather-grained virgin vinyl, with our name printed in black on the spine and front cover, is electronically sealed over rigid board to give your volumes of **db** lasting protection. Keep your copies preserved in perfect condition, protected from dust and damage.

Please send me _____ copies of the **db** Magazine binder. My check for \$ _____ is enclosed (sorry, no c.o.d.).

Name _____

Address _____

number and street

city _____ state _____ zip _____

(New York State residents please add 6% sales tax).

Mail to: **db** the Sound Engineering Magazine, 980 Old Country Road, Plainville, N.Y. 11803.

total tape duplicating with "BUILDING BLOCK" simplicity


CASSETTE TO CASSETTE, REEL TO CASSETTE, REEL TO REEL

The Telex series 235-1 is more than just another tape duplicating system. It is a concept based on modular "building blocks" which complement each other and provide total flexibility for tape duplicating. It solves the problems of interfacing between open reels and cassettes. It is a system designed for future expansion. Engineered to make tapes of true, professional quality. And it's priced within your budget.

The Telex system consists of only five basic units.

1. Solid state modular electronics containing amplifiers, meters and controls. This unit works with any combination of ten cassette or reel slaves.
2. Cassette master play transport.
3. Open-reel master play transport.
4. Cassette slave record transport. Records three cassettes simultaneously.
5. Open-reel slave record transport.

The five units are totally compatible. Intermix cassette and open-reel master or slave transports to suit your duplicating requirements; cassette to cassette, reel to cassette, reel to reel, or even cassette to reel. All units fit into table top consoles of uniform size so when your requirements change, you just add more units. It's that simple. Telex series 235-1 is heavy duty equipment with hysteresis synchronous motor tape drives, momentary push button controls and time delay circuits for smooth, positive tape handling. Selected premium grade duplicator heads provide long life and excellent frequency response. And fail safe, automatic features enable non-technical personnel to operate the system efficiently. Telex "building blocks" make a totally flexible and complete duplicating system. It's the sensible approach, designed to meet your needs today, next month and in the years to come. Made in the U.S. to professional standards.

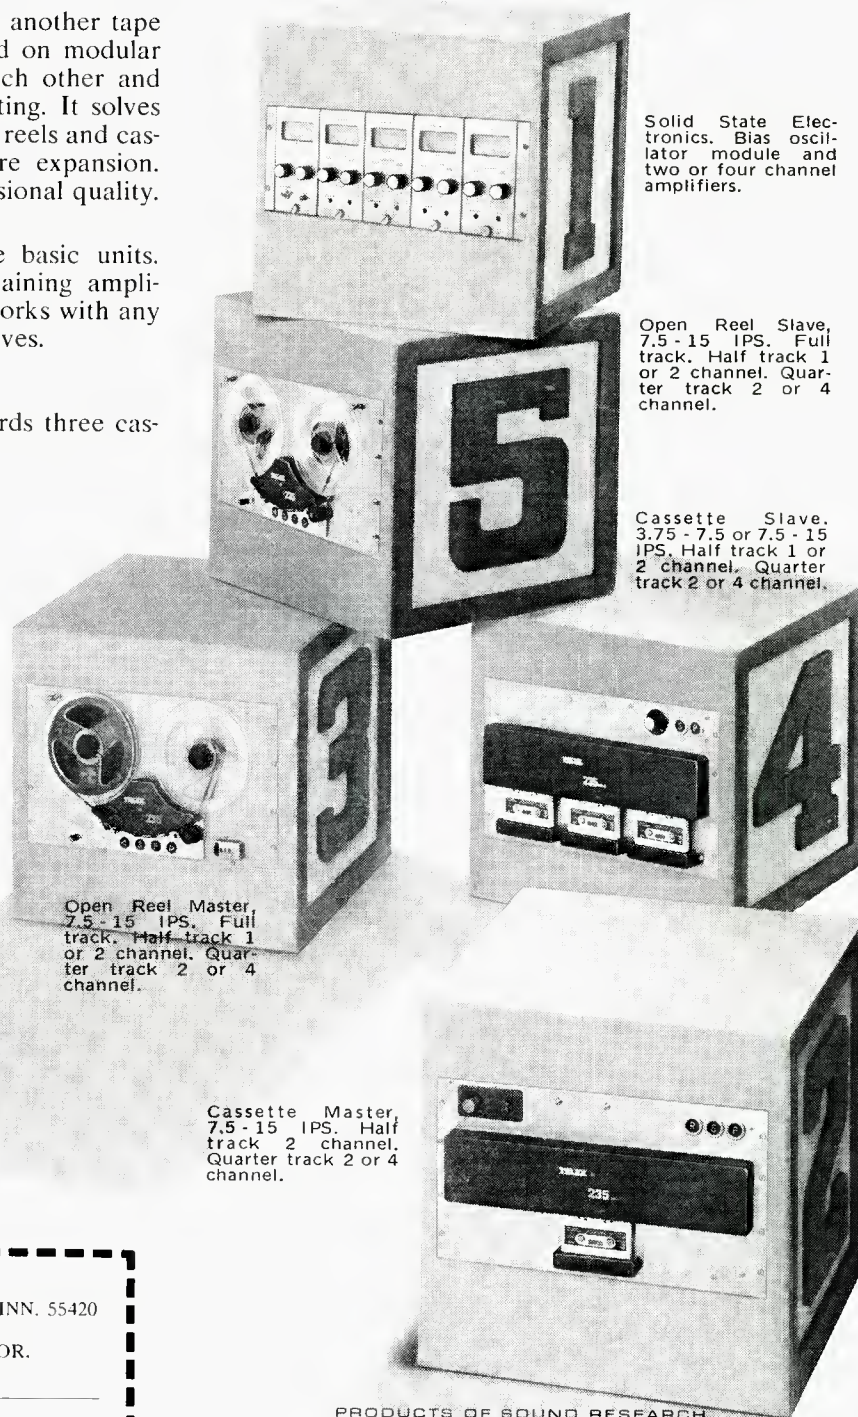

Solid State Electronics. Bias oscillator module and two or four channel amplifiers.

Open Reel Slave, 7.5 - 15 IPS. Full track. Half track 1 or 2 channel. Quarter track 2 or 4 channel.

Cassette Slave, 3.75 - 7.5 or 7.5 - 15 IPS. Half track 1 or 2 channel. Quarter track 2 or 4 channel.

Open Reel Master, 7.5 - 15 IPS. Full track. Half track 1 or 2 channel. Quarter track 2 or 4 channel.

Cassette Master, 7.5 - 15 IPS. Half track 2 channel. Quarter track 2 or 4 channel.

PRODUCTS OF SOUND RESEARCH

TELEX®

COMMUNICATIONS DIVISION

9600 ALDRICH AVENUE SOUTH • MINNEAPOLIS, MINNESOTA 55420

CANADA: DOUBLE DIAMOND ELECTRONICS, LTD., 34 Progress Avenue, Scarborough 4, Ontario
EXPORT: ROYAL SOUND COMPANY, INC., 409 North Main Street, Freeport, N.Y. 11520

TELEX COMMUNICATIONS DIVISION
9600 ALDRICH AVE. SO. • MINNEAPOLIS, MINN. 55420
DBS
PLEASE SEND INFORMATION ON DUPLICATOR.

NAME _____

TITLE _____

INSTITUTION _____

ADDRESS _____

CITY _____ STATE _____ ZIP _____

Circle 29 on Reader Service Card

www.americanradiohistory.com

The Pick-Up Pros.



WOR-FM, the country's leading FM/Stereo rock station, has been using Stanton cartridges since its inception.

Program Director Sebastian Stone likes the smooth, clean sound the Stanton delivers; the way it is able to pick up everything on the record so that the station can assure high quality transmission of every recording.

Eric Small, Chief Engineer for WOR-FM, likes the way that Stanton cartridges stand up under the wear and tear of continuous use. "We standardized on Stanton a couple of years back," Small said, "and we haven't had a cartridge failure since." Studio Supervisor Artie Altro concurs.

Whether you're a professional or simply a sincere music lover, the integrity of a Stanton 681 Series cartridge delivers the quality of performance you want.

It affords excellent frequency response, channel separation, compliance and low mass and tracking pressure. And every Stanton cartridge is fitted with the exclusive "longhair" brush to keep grooves clean and protect the stylus.

For complete information and specifications on Stanton cartridges, write Stanton Magnetics, Inc., Terminal Drive, Plainview, L.I., N.Y. 11803.



All Stanton cartridges are designed for use with all two and four-channel matrix derived compatible systems.

George Alexandrovich

THE AUDIO ENGINEER'S HANDBOOK

● In our every day work we are used to dealing with audio lines of short length which don't introduce any noticeable ill effects to our signals. Inductance of the wire is low. So is the capacitance to ground and between conductors. D.c. resistance is usually on the order of few ohms and is generally disregarded.

However, in radio and television work audio crews are faced with a problem of transmission over telephone lines—which may be providing an audio path from the local sports arena or from a political convention hall all the way across the country. The telephone company sees to it that signals traveling a long distance are boosted from time to time to compensate for the losses occurring along the way. So-called *repeaters* provide needed amplification. But broadcasting audio signals have to be of wider frequency range than those just for speech. In a long line, high frequencies are attenuated because of capacity between wires and ground. Low frequencies are lost because of series inductance of the wire. Mid-range frequencies are affected by resistive losses as well as inductive and capacitive effects to a lesser degree. Response of a typical telephone line has a 6 dB slope with the knee at approximately 2-3 kHz, attenuating 10 kHz more than 10 dB. The low end has similar rolloff characteristics which will vary from line to line—but not so much that we can not help correct it to some degree.

As I said before the telephone company sees to that that deterioration of the signal quality doesn't reach the point where it can not be boosted or restored without too much noise. The telephone company is also willing to lease equalized lines to broadcasters—and even make up the equalization losses. Depending on the amount of equalization required, losses may run as high as 30 dB. However, equalized lines are generally available as unidirectional wires per-

mitting communications in one direction only. But to obtain an equalized line may present some difficulties these days with telephone crews very busy with maintenance work. If you need a good line in a hurry you may as well forget it. The only thing left for you to do is to help yourself. Have an equalizer handy so that it can be inserted into the line any time you need it.

The simplest equalizer for the line consists of rlc resonant circuit adjusted to the frequencies of about 8-9 kHz and connected across the line as shown in FIGURE 1. The resistive part of the circuit adjusts the effect of the circuit on the response of the line. If the *r* is minimal, the effect is greatest but also the loss introduced by the equalizer is the greatest. If *r* is made large effect is small. Typical values for the circuit are;

L 200 mH with *q* of 50 or more
C 2000 pF
r 0-1000 ohms

Because the gain of the line changes with the increased effect of the high-frequency equalizer, it may be advisable to use a double ganged potentiometer so that the second section adjusts the output level as the amount of equalization is varied. See FIGURE 2. Resistor *R*₃ has to be adjusted so that gain in the midrange remains constant as the potentiometer is rotated. What this circuit does is simply keep the losses constant. It should be kept in mind that output level from such an equalizer should be fed into the medium level input in the console where additional amplification is available. Normal telephone levels range between -20 to -10 dBm level. If we introduce a loss of another 10-15 dB because of equalization equalizer output level will be more like -30 or -35 dBm. If you are concerned with a permanent line there is no need for adjustable equalization.

But now let us assume that you require to boost low frequencies as

Figure 1. The simplest telephone equalizer.


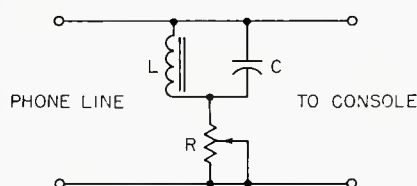


Figure 2. It may be advisable to use a double-ganged pot.



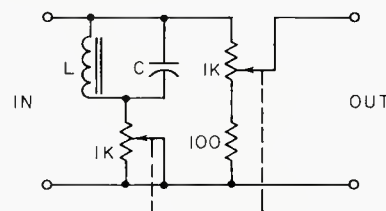

8-IN, 4-OUT: \$1890. Plus Tax.

Here's what \$1,890 buys you:

One each floor-standing TASCAM Model 10 Mixing Console. Manufactured by TEAC Audio Systems.

Eight input modules, each providing a 3-position input pad, feedback-type mic attenuator, line attenuator, 3-position input selector, hi- and lo-pass filters, hi, lo and mid-band equalizers, complete echo-send and receive circuitry including pre- and post-selection, channel and pan assignment pushbuttons, a pan pot, and a unique straight-line fader.

Four sub-master modules, each providing a straight-line fader, source / tape monitor control, and separate monitor level controls.

One master module with a straight-line fader. Four 4" VU meters with fast-acting LED peak indicators.


Plus, pre-wired facilities for up to four additional input modules and other optional accessories including talkback, remote transport control, quad panner, and headphone monitor.

And if all that seems like an awfully good buy for your money, here's what \$1,770 for our Series 70 Recorder/Reproducer buys you:

1/2" transport, 4-channel modular electronics, with overdub, plug-in head nest with ferrite heads and scrape filter, remote control connector, touch-button solenoid/relay controls with anti-spill circuitry, heavy-duty 6-pole torque motors, and indirect drive 2-speed hysteresis-synchronous capstan motor.

Both units available with studio line impedances optionally.

Since you're still impressed by these values, don't forget the sales tax. That's the one accessory that's not optional.

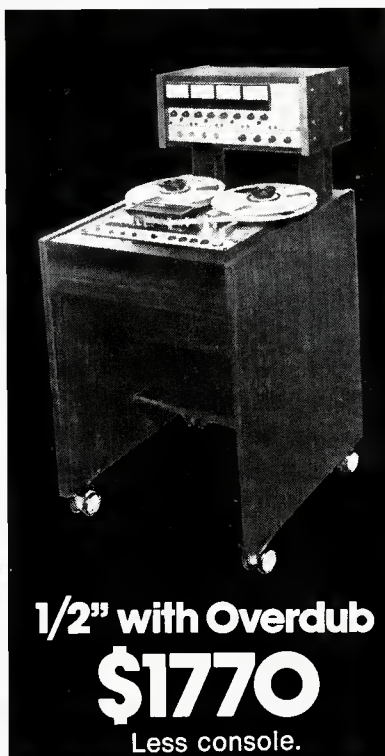

1/2" with Overdub
\$1770
Less console.

See us at the AES Convention, New York

TASCAM CORPORATION
TEAC AUDIO SYSTEMS CORPORATION OF AMERICA
5440 McConnell Avenue
Los Angeles, California 90066
(213) 390-3566

Circle 21 on Reader Service Card

www.americanradiohistory.com

FREE from AKG

48-page technical brochure on Field Effect Transistor condenser microphones and describing in detail:

- A. Structural details of new type miniature condenser microphone capsules with various pick-up pattern, complete with performance and comparison charts.
- B. F.E.T. condenser microphone preamplifier technology, including schematics and specifications.
- C. Modern powering techniques of F.E.T. condenser microphones.
- D. Application hints, including illustrations and descriptions of recording accessories.



This booklet is of interest to every innovative recording and broadcast engineer. Please fill out coupon below or send us your request on your organization's stationery.

NAME _____

TITLE _____

FIRM _____

ADDRESS _____

CITY _____


STATE _____ ZIP _____



MICROPHONES • HEADPHONES

DISTRIBUTED BY
NORTH AMERICAN PHILIPS CORPORATION
100 EAST 42nd STREET, NEW YORK, NEW YORK 10017

Figure 3. Tap the phone line as shown to feed the phone line into the audio system.

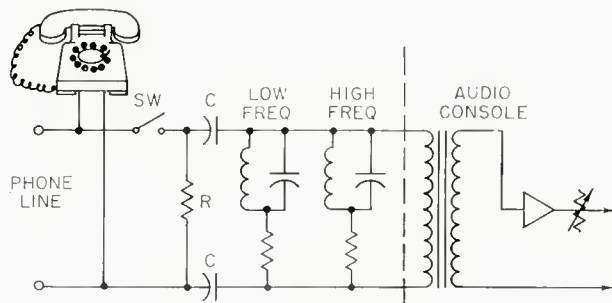

well. Simply erect the same type of a circuit as for high frequencies except with different values. If you want the circuit to resonate at 100 Hz you would need either a 2 henry choke and 1 μ F capacitor, or a 1 henry inductor with 2 μ F capacitor—or any other suitable LC combination producing desired low-frequency resonance (consult a reactance-frequency chart). Connected across the line in a similar way, it will attenuate all frequencies outside the resonant frequency. Again, resistor in series will limit the effect of the circuit.

Needless to say, a conventional telephone line has d.c. potential and has to be decoupled by a capacitor—and then a fixed resistor has to be connected across the line to act as a holding circuit for the relay at the telephone exchange. This refers only to the two-way telephone line with dial and ring capabilities. Let us assume that you use a conventional telephone receiver for the incoming line. As the outside call is received, contact is initially established by lifting the head set. In order to feed the signal into your audio system you have to tap the phone line as shown on FIGURE 3. The disconnect switch is for the purpose of breaking the circuit after the transmission is completed. After the initial contact is established through the use of telephone set this switch is turned on and the receiver is put back on the hook. Then the holding circuit takes over the function of keeping the line open.

It is quite obvious that very few people in this field of audio have time to build and experiment with their own circuits. Simplest thing is to use available program equalizers for the job. Inserting an already designed unit into the telephone line may prove to be the simplest thing.

Now let us examine the problem of line equalization from the radio station to the transmitter site. Although many stations depend on the telephone company, just as many string their own lines—at times for several miles. These stations should consider themselves lucky. They can

pump as much level into the lines as they want to—knowing that signal will not be clipped, as in the case when commercial telephone lines are used. Those stations can and should expect better signal-to-noise ratio at their transmitters, as well as better frequency response.


The transmission line for the signal can be fed from a source impedance of almost zero ohms without a transformer, with ample voltage to insert the equalizer on the other end—and still have enough level to drive a transmitter. Only the telephone company requires a 600-ohm pad on the output of the console. Impedance of the line as measured at the transmitter will consist of impedance of the wires only, therefore losses will be minimal. If the impedance measured is only a couple of hundred of ohms at midrange, load doesn't have to match it—let it be bridging (and balanced, of course).

In this case of a super private line you can pre-emphasize the signal before feeding it into the line—just as it is done in tape recorders or disc recording. Boost the most troublesome frequencies (highs and lows) and then de-emphasize them at the other end if required. This may also hold true for leased lines if there is no appreciable restriction on the level feeding the line. Usually there are transformers in the line which restrict you from feeding high enough levels, also the telephone company is concerned about the crosstalk between adjacent channels or lines. If the signal strength in one pair of wires is much higher than certain acceptable level it could be heard in other lines.

As long as transmission of signals will be done through wires, problems of losses and equalization will be with us. New techniques of signal transmission are emerging, starting with scrambling using digital and analog signal conversion which tend to improve the existing conditions. But even with these techniques response of the line is very important because it limits the transmission rate and its quality.

Circle 16 on Reader Service Card

Circle 36 on Reader Service Card ➔

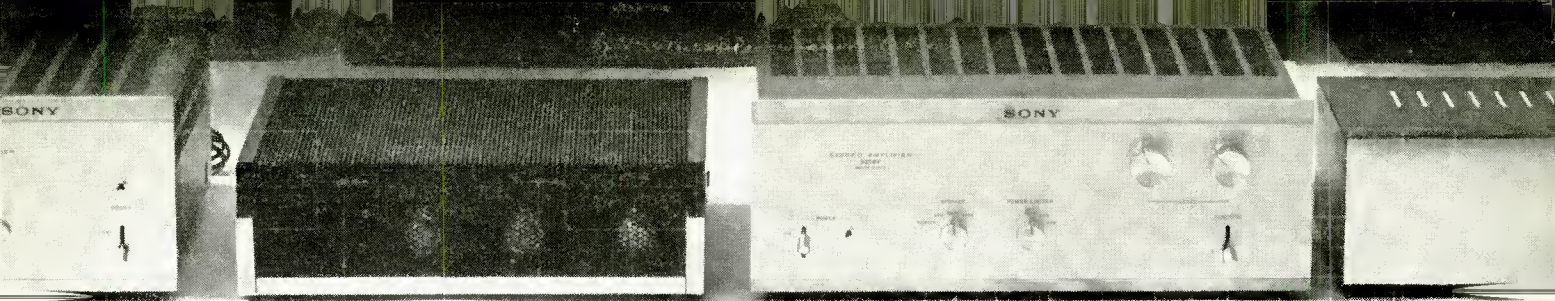

We left the power to the people

The new Sony STC-7000 combines a super $1.7\mu\text{V}$ tuner and a preamp with the widest possible flexibility. There's no power amplifier section — leaving the choice of power output completely up to you. You can make it a receiver with the thundering power of today's mightiest amplifiers, or make it a moderate-power receiver whose other specifications are anything but moderate.

All the convenience and compactness of ordinary receivers are still yours, with your power amplifier neatly tucked out of sight. But the performance is anything but ordinary. Consider the impressive tuner specifications: $1.7\mu\text{V}$ IHF sensitivity, 100 dB selectivity, and a signal-to-noise ratio of 70 dB. And to make


the most of that performance, the tuner facilities include switchable high-blend and muting, signal-input and center-channel tuning meters, a long, linear-spaced dial, rear-panel oscilloscope output jacks to help you aim your antenna for minimum multipath. There's also a coaxial connector for a 75-ohm shielded antenna lead.

The preamplifier is equal to the finest separate components. High voltage integrated circuits and other advanced features give it sensitivity, overload resistance, wide dynamic range, and clean, quiet performance to match the high standards of the tuner: only 0.1% harmonic or IM distortion, with 10Hz to 100 kHz response, and a 90 dB signal-


to-noise ratio. And its facilities are as complete as those on any separate preamplifier, including such unusual extras as rear-panel audio scope output jacks, dual tape monitors with direct tape-to-tape dubbing, front and rear panel Aux inputs, a microphone mixing input with shutoff, and sharp-cutting 12 dB/octave high and low filters.

Think of it as the finest, *most* powerful receiver you can buy — or the finest, *least* powerful. The choice is yours. The cost of this high quality component, \$549.50* Sony Corporation of America, 47-47 Van Dam Street, Long Island City, New York 11101.*Suggested retail price.

SONY® Preamp/Tuner

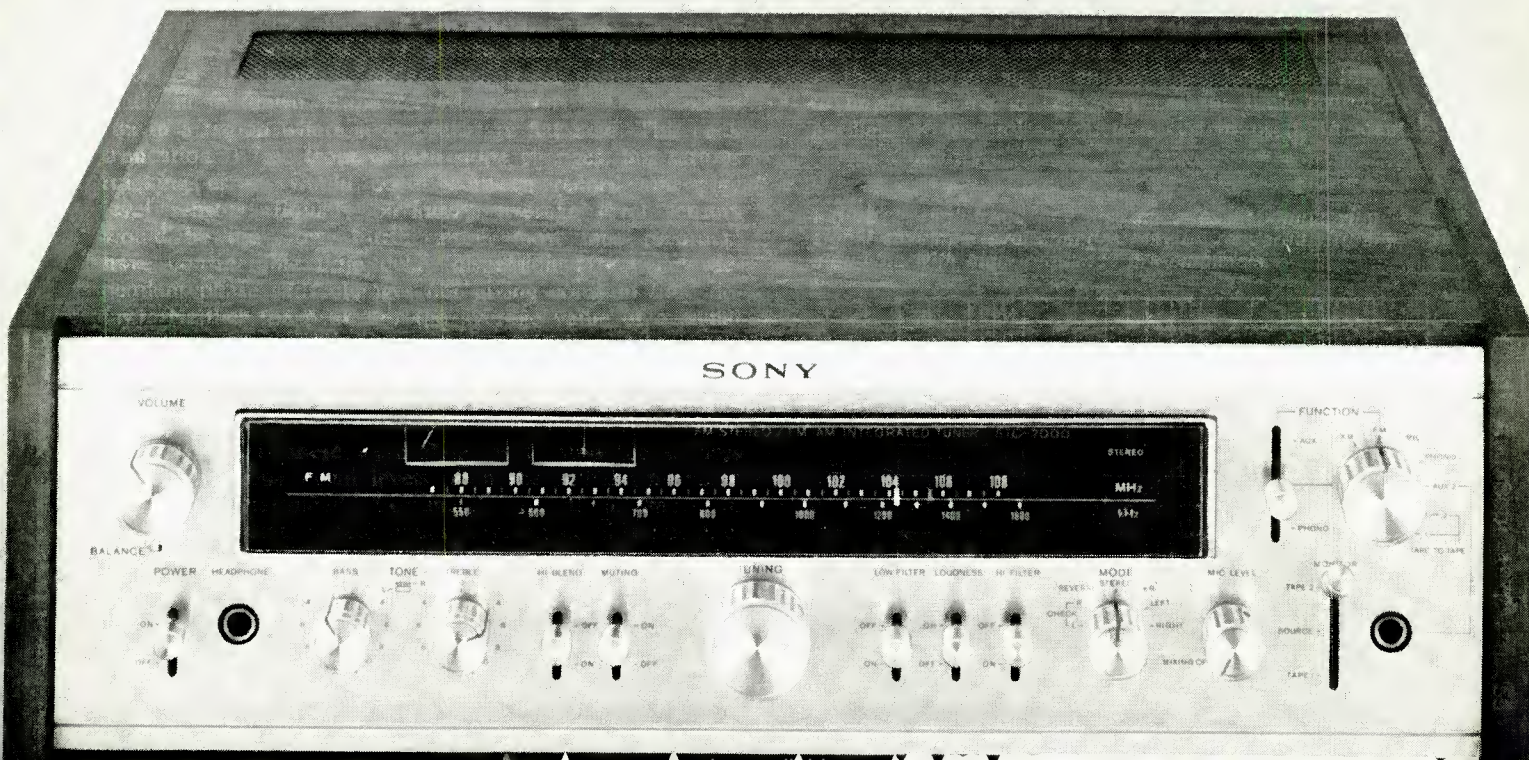

DELTA-7 101

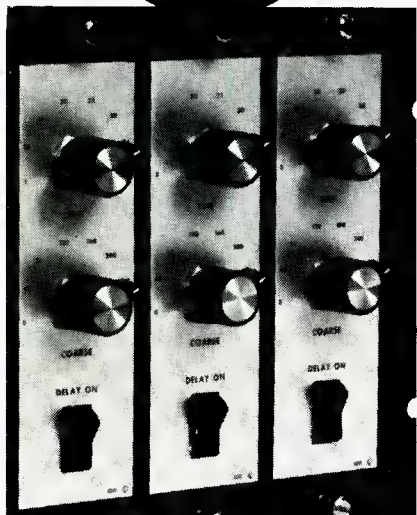

ALL ELECTRONIC DIGITAL AUDIO DELAY SYSTEM

**Five Independent Outputs
Each Output Separately Adjustable
in 5 ms Steps From 5-320 ms**

The Delta-7 101 is an audio recorder and playback unit which uses neither tape nor moving parts. It converts audio into a digital code and stores it in its computer solid-state memory. It can therefore offer you the following specifications:

- zero wow and flutter
- +22 dBm output with less than 1% distortion
- 60 dB dynamic range
- frequency response 20–12kHz ± 2 dB
- standard 19" rack panel, 7" high and 18" behind the panel

In one stroke, the Delta-7 101 eliminates all the problems of tape delay: no mechanical failure, no wow and flutter, no drop-outs or broken loops, no tape hiss or distortion. You can plug it into your rack, set it, and forget it.

When the Delta-7 101 was being designed, we had two options:

- 1) Make a unit with all the flexibility demanded by the job;
- 2) Cut costs to the bone and let the "concept" sell the unit.

We took the first course. Sure, fixed delays would have been cheaper, but we know from experience that you never know exactly how much delay you will need until you make the installation. And even in fixed installations it becomes necessary to change delays to suit the speaker set-up required by a particular program. We made the steps 5 ms, because this is the smallest increment ever needed.

For additional information, call or write:

GOTHAM
AUDIO CORPORATION

2 West 46th Street, New York, NY 10036 (212) 265-4111
1710 N. La Brea Avenue, Hollywood, CA 90046 (213) 874-4444

Circle 41 on Reader Service Card

Norman H. Crowhurst

THEORY AND PRACTICE

● Often, in analyzing a situation, there are different ways of looking at the same thing. For example, a composite audio signal can be viewed as a waveform with various squiggles in, through time, or it can be analyzed into a spectrum of audio frequencies, that also vary with time. In typical introductory books on sound, or on music, waveforms will be shown for a violin, a flute, and perhaps some other instruments, with the notion that these show why the instruments sound different.

Unless you know how to interpret waveforms in terms of their frequency content, such pictures do not help much. The uninitiated, for example, would look at the two waveforms in FIGURE 1 and conclude they were quite different when, in fact, they each represent a fundamental with the same percentage of third harmonic and therefore would be indistinguishable from one another in listening.

So, you conclude, the important thing about audio signals is not their precise waveform, but their precise frequency content. To you, as a listener, this is probably true. It expresses what your hearing depends on to give you the sensation that you experience far more accurately than any other statement in such concise terms.

But if you are an audio man, concerned with handling such signals in electronic equipment, the picture changes. That statement is no longer true. For many purposes, an important factor is the peak amplitude of the signal, and how it fits within the handling capability of the system. Thus, although the two waveforms of FIGURE 1 represent the same signal level, with merely a phase shift in the harmonic, relative to the fundamental, their peak levels are different, which means an amplifier or similar piece of


equipment might handle them differently.

To a lesser degree, this is true at other points on the waveform than just the peaks. Although most treatments of feedback networks analyze their performance with frequency as a reference—the Nyquist plot and other forms of stability diagram are usually plotted with frequency as the referent, whether or not frequency appears on the chart as such. But the system really handles waveforms on an instant-to-instant basis.

This is why, when some element within the chain runs into a condition such that its parameters change, such as clipping, or crossover distortion, the way feedback behaves is affected at the point on the waveform where this effect occurs, not at some specific frequency, although the frequency of signal being handled at the moment may also affect the result.

This fact explains why feedback can sometimes cause an amplifier to clip more severely than it would without feedback, or with a lesser amount of feedback. The purpose of feedback is to reduce distortion (among other

Figure 1. Although these waveforms look different, they have identical components of fundamental and third harmonic. Their rms values are the same, they would sound the same, in quality and level, but their peak values are quite different.

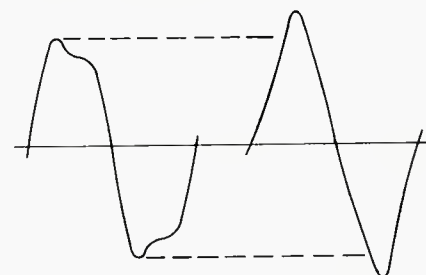

Crown

PROFESSIONAL STUDIO EQUIPMENT

Specs	15ips	7½ips
w. & fl.	0.06%	0.09%
f. resp.	40Hz to 30kHz	20Hz to 20kHz
S/N	-60dB	-60dB

3 speeds - 15, 7½ & 3¼ips; hysteresis synchronous drive motor

computer logic controls for safe, rapid tape handling and editing; full remote control optional

torque reel motors
"capable of providing the most faithful reproduction of sound through the magnetic recording medium... to date" - Audio magazine, 4/68
optional Trac-Sync
individual channel equalizers
third head monitor with A/B switch; meter monitoring of source, tape, output and source+tape; sound-with-sound, sound-on-sound and echo
2 mixing inputs per channel
individual channel bias adjust


\$1790 for basic rack-mount half-track stereo deck, about \$2300 with typical accessories; Formica floor console \$295, rugged portable case - \$69

modular construction with easy access to all 10 moving parts and plug-in circuit boards; deck rotates 360° in console, locks at any angle

RECORDERS & REPRODUCERS



SX711 Claimed by its pro audio owners to be the finest professional tape recorder value on the market today - price versus performance
■ Frequency response at 7½ips ±2dB 20Hz-20kHz, at 3¼ips ±2dB 20Hz-10kHz ■ Wow & flutter at 7½ips 0.09%, at 3¼ips 0.18% ■ S/N at 7½ips -60dB, at 3¼ips -55dB ■ Facilities: bias metering and adjustment, third head monitor with A/B switch, sound-with-sound, two mic or line inputs, meter monitoring same as CX822, 600Ω output ■ Remote start/stop optional, automatic stop in play mode ■ \$895 for full-track mono deck as shown, \$995 for half-track stereo deck



SP722 Ideal reproducer for automation systems ■ Meets or exceeds all NAB standards ■ Remote start/stop optional, automatic stop in play mode ■ \$595 for half-track stereo reproducer

CX822

Crown tape recorders and reproducers are available in 42 models with almost any head configuration, including 4 channels in-line. Patented electro-magnetic brakes maintain ultra-light tape tension and never need adjusting. They are made by American craftsmen to professional quality standards, with industrial-grade construction for years of heavy use.

All Crown amplifiers are warranted three years for parts and labor. They are 100% American-made to professional quality standards. All are fully protected against shorts, mismatch and open circuits. Construction is industrial-grade for years of continuous operation.


For more information, write CROWN, Box 1000, Elkhart, Indiana 46514

STUDIO MONITOR AMPLIFIERS



D60

Delivers 30 watts RMS per channel at 8Ω ■ Takes only 1¾" rack space, weighs 8½ lbs. ■ IM distortion less than 0.05% from 1/10w to 30w at 8Ω ■ S/N 106dB below 30w output ■ \$229 rack mount



D150

Delivers 75 watts RMS per channel at 8Ω ■ IM distortion less than 0.05% from 0.01w to 75w at 8Ω ■ S/N 110dB below 75w output ■ Takes 5¼" rack space, weighs 20 lbs. ■ \$429 rack mount



DC300

Delivers 150 watts RMS per channel at 8Ω ■ IM distortion less than 0.05% from 0.01 w-150w at 8Ω ■ S/N 110dB below 150w output at 8Ω ■ Lab Standard performance and reliability ■ "As close to absolute perfection as any amplifier we have ever seen" - Audio magazine, 10/69 ■ \$685 rack mount

Circle 40 on Reader Service Card

www.americanradiohistory.com

for that heavy studio sound!

LA-3A leveling amplifier

The great one with the
Electro-Optical attenuator

- Half rack size
- High output (+25 dBm)
- Low price (under \$400.00)

See your dealer or write for complete specifications.



11922 Valerio Street, New Hollywood, California 91345
(213) 764-1500
Exclusive export agent:
GOTHAM AUDIO DEVELOPMENT CORP., NEW YORK, N.Y.
Telex #233353 GADC UR

Circle 27 on Reader Service Card

purposes). So if an amplifier component clips quite positively and nothing will make it deliver more current, voltage, or whatever, feedback will correct the input to try to eliminate the deficiency.

Then it's like the irresistible force (produced by the feedback), meeting the immovable object (the component that clips): catastrophe! The impact is worse than if the clipping was less severe, or the feedback less forceful. This is something that the theory, based on frequency analysis, does not show. Waveform is modified on an instant-to-instant basis.

Here's another example. Suppose that a clipping effect acts as short-circuit to signal, beyond a certain level, and that it is sensitive not to absolute level from a reference zero (FIGURE 2) but to changing signal. Then when signal exceeds a certain level in one direction, the output waveform will suddenly square off beyond that point.

If the squaring off referred to absolute signal, the flattening would cease only when the level of input came back down to the same point. But if the circuit responds to changing signal, as soon as the signal change reverses direction, the flattening ceases, which means it hits the opposite clipping point a little sooner.

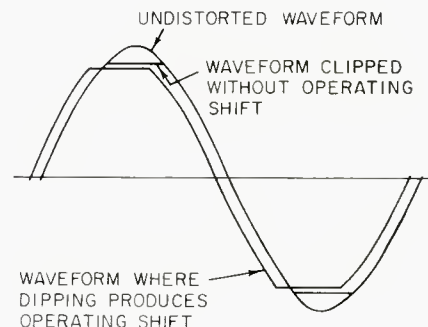


Figure 2. Some waveforms to show different possible effects of clipping, at the same nominal level (a slight difference in clipping level is shown, only to avoid confusion between the two shapes).

FIGURE 2 shows this distinction.

Another example of a signal that can be viewed differently is a frequency modulated radio-frequency carrier. From the viewpoint of the modulating signal—the audio—the central carrier frequency is modified by the modulation, without changing its amplitude. This is a fairly simple concept, and one that proves useful in examining modulator and demodulator circuit behavior. You consider the amplitude and frequency of a waveform that, at every point, looks like a single, pure sinusoid.

Provided the frequency, during its fluctuation, does not deviate by more than the prescribed 75 kHz from center frequency, this will, in general, ensure that the transmitted intelligence stays within the band allowed to that carrier. But that is not quite enough, from the viewpoint of determining whether any energy splashes into an adjoining channel.


A radio frequency, frequency modulated by a specific modulating frequency, can also be regarded as generating a whole family of sidebands, distributed across the spectrum like lines separated by intervals equal to the modulating frequency.

The magnitude and distribution of these side bands, for any one modulating frequency, depends on the exact relationship between the modulating frequency and the so-called deviation ratio. And when, as happens on practical signal, many modulating frequencies are applied simultaneously, the changing assortment of sidebands generated becomes very complex, although the composite wave, at all times, looks like a single, simple sine wave, whose frequency is varying.

If a few tiny stray sidebands spill over into an adjoining channel, and are then trimmed off by a filter that removes everything above 75 kHz deviation from central carrier, how does this affect the modulation trans-

Soundcraftsmen presents the new RP10-12 PROFESSIONAL EQUALIZER for RECORDING and PLAYBACK

PERFECT tailoring of octave-wide bands... Infinitely variable adjustment flexibility
... Special Effects programming ... Instant re-setting

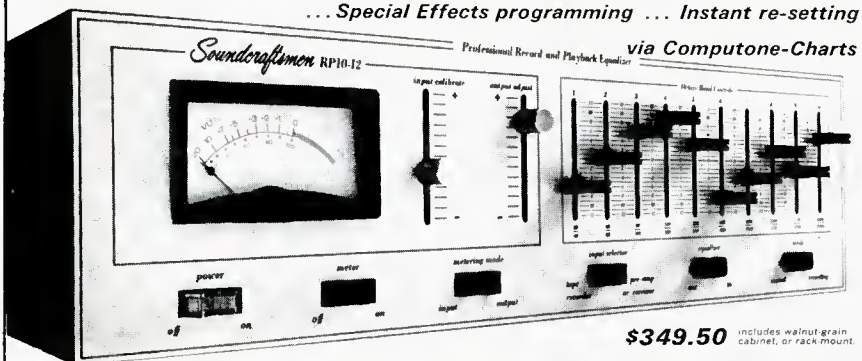

Recording Studios • Audiophiles • Night Clubs • Performers • Theatres
Churches • Gyms • Auditoriums • Hi-Speed Duplicating • Musical Groups


SPECIFICATIONS

FREQUENCY RESPONSE: ± 1 dB from 20-20,480 Hz, 1 dB down @ 10 Hz,
1/2 dB down @ 100 KHz
HARMONIC DISTORTION: Less than .08% @ 2V, .05% @ 1V, Typ. .01% @ 1V
IM DISTORTION: Less than .08% @ 2V, .05% @ 1V, Typ. .01% @ 1V
SIGNAL-TO-NOISE RATIO: Better than 90 dB below 2V output, Typ. 95 dB
INPUT IMPEDANCE: 100K ohms — Operable from any source up to 100K ohms;
any Mixer, Hi-Fi Preamp, Receiver or Tape Recorder
OUTPUT IMPEDANCE: 600 ohms — (Operable into any Mixer, Hi-Fi Amp,
Receiver or Tape Recorder)
INSERTION LOSS: Zero (side controls centered, and "OUTPUT ADJUST" control
set so that "Input" equals "Output")
MAXIMUM OUTPUT: 7 V in to 100 ohms, 3.5 V into 600 ohms — (13 dBm).

SPECIAL FEATURES

VU METER: Precision $\pm .5\%$ meter movement provides an accurate
visual display, to enable exact unity gain input/output matching.
INDUCTORS: Toroidal and Shielded ferrite core.
CIRCUIT BOARDS: Military grade G-10 glass epoxy.
RESISTORS: Low-noise selected carbon film throughout.
SWITCH CONTACTS: Gold plated to assure low noise and reliability.
OUTPUT ADJUST: Controls a continuously variable 18 dB range,
from -12 dB to +6 dB, to match input to output.
RANGE: 12 dB boost and 12 dB cut, each octave centered at 30,
60, 120, 240, 480, 960, 1920, 3840, 7680 and 15,360 Hz.
SIZE: Walnut-grained wood case $5\frac{1}{2}'' \times 18'' \times 11''$, Rack-panel $5\frac{1}{2}'' \times 19''$.

\$349.50 includes walnut grain cabinet, or rack mount.

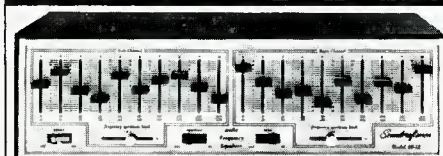

STEREO 20-12 \$299.50

MASTER OUTPUT LEVEL: "Frequency spectrum-level" controls for left and
right channels, continuously variable 18 dB range, for unity gain
HARMONIC DISTORTION: Less than .1% THD @ 2V, Typ. .05% @ 1V
IM DISTORTION: Less than .1% @ 2V, Typ. .05% @ 1V
SIGNAL-TO-NOISE RATIO: Better than 90 dB below 2V output,
(any Hi-Fi Preamp, Receiver or Tape Recorder)
INPUT IMPEDANCE: Operable from any source 100K ohms or less —
(any Hi-Fi Preamp, Receiver or Tape Recorder)
OUTPUT IMPEDANCE: Operable into 3K ohms or greater —
(any Hi-Fi Amp, Receiver or Tape Recorder)
SIZE: Walnut-grained wood case $5\frac{1}{2}'' \times 18'' \times 11''$, or rack-mount


ALSO AVAILABLE, the 20-12-600... \$349.50
SAME AS 20-12 ABOVE, EXCEPT HAS 600 OHM OUTPUT

Soundcraftsmen: 1310 E. Wakeham Ave., Santa Ana, Cal. 92705 Ph: 714-836-8375

Circle 25 on Reader Service Card

www.americanradiohistory.com

WE HAVE IT, IT WORKS,

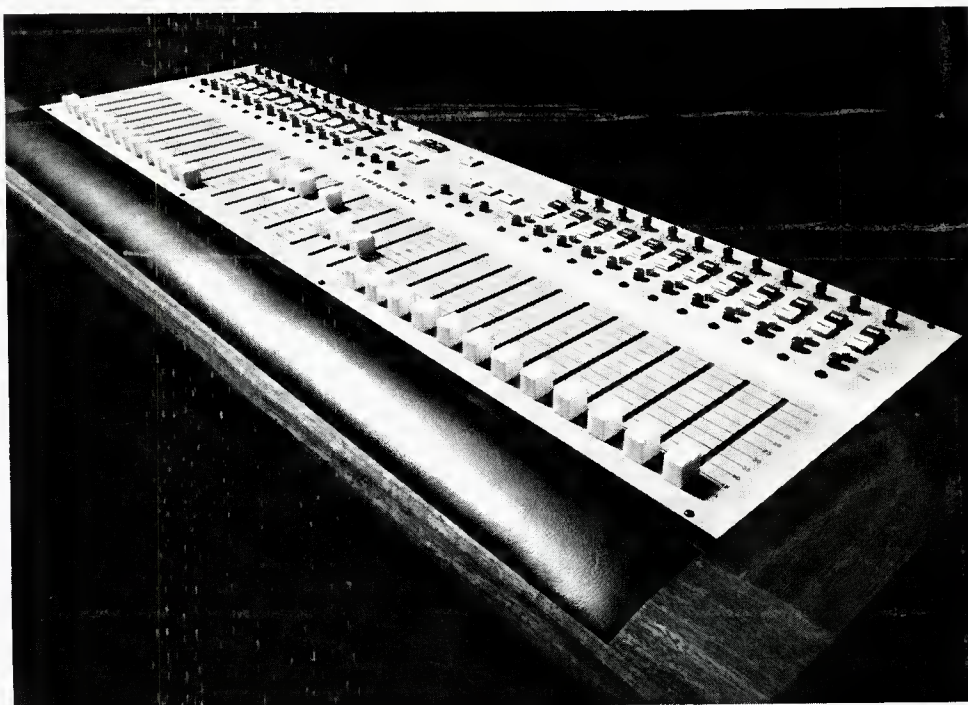

compumix™

The first expandable automated mixing system that makes sense. It's designed to augment your *present* mixing console... large or small. Even if you're not ready to address a memory with your mix information*, our controller will give you the flexibility of an extra pair of helpful hands: to make those exasperating mixing gymnastics more comfortable.

COMPUMIX™ makes sense because you can utilize your existing equipment to add the benefits of automated mixing. It's ready for all the progressive thinkers to become doers.

COMPUMIX™ is noiseless voltage-controlled sub-mix grouping and switching control. Think about that, when you decide... simply interface our digital processor for that memory feature.

COMPUMIX™ won't let you forget the good mixes. Little things make a big difference, however, *big things make a bigger difference.*

THE COMPUMIX™ CONTROLLER • 24 inputs (expandable) to 32 • 6 sub-mix groupings • master fade • 54 program auxiliary switch functions • complete read, write, update control with our exclusive digital VCA-800.

*With COMPUMIX™ the memory mix-information can be stored in the following ways: 2 channels of the multi-track master, *any peripheral multi-track audio recorder*, cassette or cartridge recorder with minimum recording bandwidth requirements.



**quad/eight
electronics**

11929 Vose Street □ North Hollywood, California 91605 □ 213/764-1516

Circle 45 on Reader Service Card

www.americanradiohistory.com

mitted? Removal of those sidebands, without changing anything within the allowed band, would probably cause the modulated carrier either to vary slightly in amplitude, or else to fail to follow the input modulation faithfully, or perhaps both.

But when feedback is applied over

the whole system, so that, with all sidebands beyond 75 kHz of central carrier completely removed, the demodulated signal modifies the input, the remaining sidebands, within the allowed range, are modified so that very little fluctuation in amplitude occurs, and the output modulation closely follows the input.

With amplitude modulation, all those frequencies are present. True the signal can also be regarded as a carrier whose amplitude is modulated without its frequency being changed. But those sideband frequencies are inseparably linked with the modulation frequencies they represent. If the sidebands are lopped off at 4.5 kHz on either side of the carrier, the transmitted modulation is lopped off at 4.5 kHz, period.

With frequency modulation, the link is not so definite. In both cases, what influences the received signal is how the effective carrier varies, one in amplitude and the other in frequency, with the opposite quantity regarded as constant in each case. But in frequency modulation, whether frequencies more than 75 kHz from the carrier are represented in the composite synthesis does not directly affect the modulation, as it does in amplitude modulation.

Of course, that statement has limits too. If it didn't, fm would find a use

on medium frequency band, where it is definitely not applicable: you cannot have a fractional deviation ratio. If the modulating frequency is 9 kHz, the nearest sidebands it can generate, am or fm, will be 9 kHz on either side of the carrier.

Maybe the notion I receive in some readers' letters, that you can have your cake and eat it too, derives from listening to too many campaigning politicians, who make all kinds of promises. As adults, we should not be so naïve, although I am not exempt from such foolishness.

Earlier this year, I had heard several complaints about the Truth in Lending procedures, from both borrowers and lenders in various categories. So I studied the matter. Foolishly, I presumed that Congress had designed this legislation for the mutual benefit or protection of both borrowers and lenders and, because a Senator from our state is on the Bank and Finance Committee, I wrote to him about it.

Using my mathematical ability, I had worked out a more satisfactory procedure, that would involve less work and achieve what I thought the object was, which I sent to him in a 3-page letter. Can you guess what happened? He passed my letter to the real architects of the bill, who replied to me.

Congress (Senate or Representative House) did not design that bill. The Federal Reserve Board did. And from their reply—also a 3-page letter—that my Senator forwarded to me, the reasons they give for rejecting my suggestions make it very plain that the object of the legislation was not what I had foolishly imagined. Rather it is to help every American to get himself further into debt, thereby giving more control to various levels of creditors and most control to the super-creditors of all: the Federal Reserve System.

Why do I mention this? Because it is an election year. Maybe the fact that the people we elect get their directives, not from us, but from various government agencies, will explain why there is so little choice between Democratic, Republican, or Independent. They all follow bureaucrats' orders. And in a sense, it's our fault. We do not give them anything else to do.

If we would just stop listening to campaign promises that they have not a prayer of fulfilling, and look for candidates who want to represent us and implement what we want done, thereby reversing roles back to what the Constitution laid down, instead have the servants boss the masters, this country could change in a hurry. Why not pass the word? ■

AUDIO ENGINEER


Electronics engineer with experience in circuit design of complete high-performance audio systems. Must have a good working knowledge of low-noise amplifiers, active and passive filters, power amplifiers and power supplies. Some acoustic experience, perhaps in sound reinforcement or consumer hi-fi will be helpful.

Must have a demonstrated record of accomplishment including one or more products of his design in successful production.

Send resume and earnings record in complete confidence to:

H. E. Boyce
ELECTRO-VOICE, INC.
600 Cecil Street
Buchanan, Michigan 49107

The Super Parametric Equalizer

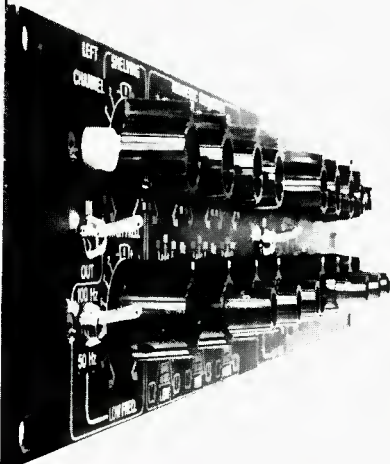

Of the many Equalizers available today, the ITI ME-230 Parametric Equalizer is the only one that offers you all these truly outstanding recording features—


- **All controls are continuously variable.** No more working with arbitrarily fixed positions. With the ITI Parametric Equalizer—you record using your mind and ears, with your hands only transmitting the orders of what you hear.
- **Remarkable frequency range.** 10-800 Hz, 100-8,000 Hz, and 400-25,600 Hz, each accurately calibrated, with boost or cut up to 12db about any center frequency.
- **Continuously variable Selectivity or "Q".** From 4 to 14dB/octave with no effect on the absolute magnitude of the center frequency.
- **No inductors used**—In the Parametric sections. Ringing on transients is virtually non-existent.

The ME-230 Parametric Equalizer—our Super Equalizer—is for all those who want more than "just good enough" sound recording. We invite you to call or write for more details about its high degree of flexibility and superb performance.



**INTERNATIONAL
TELECOMM, INC.**

McCormick Road and Schilling Circle
Hunt Valley, Maryland 21031
Telephone: 301/666-7770

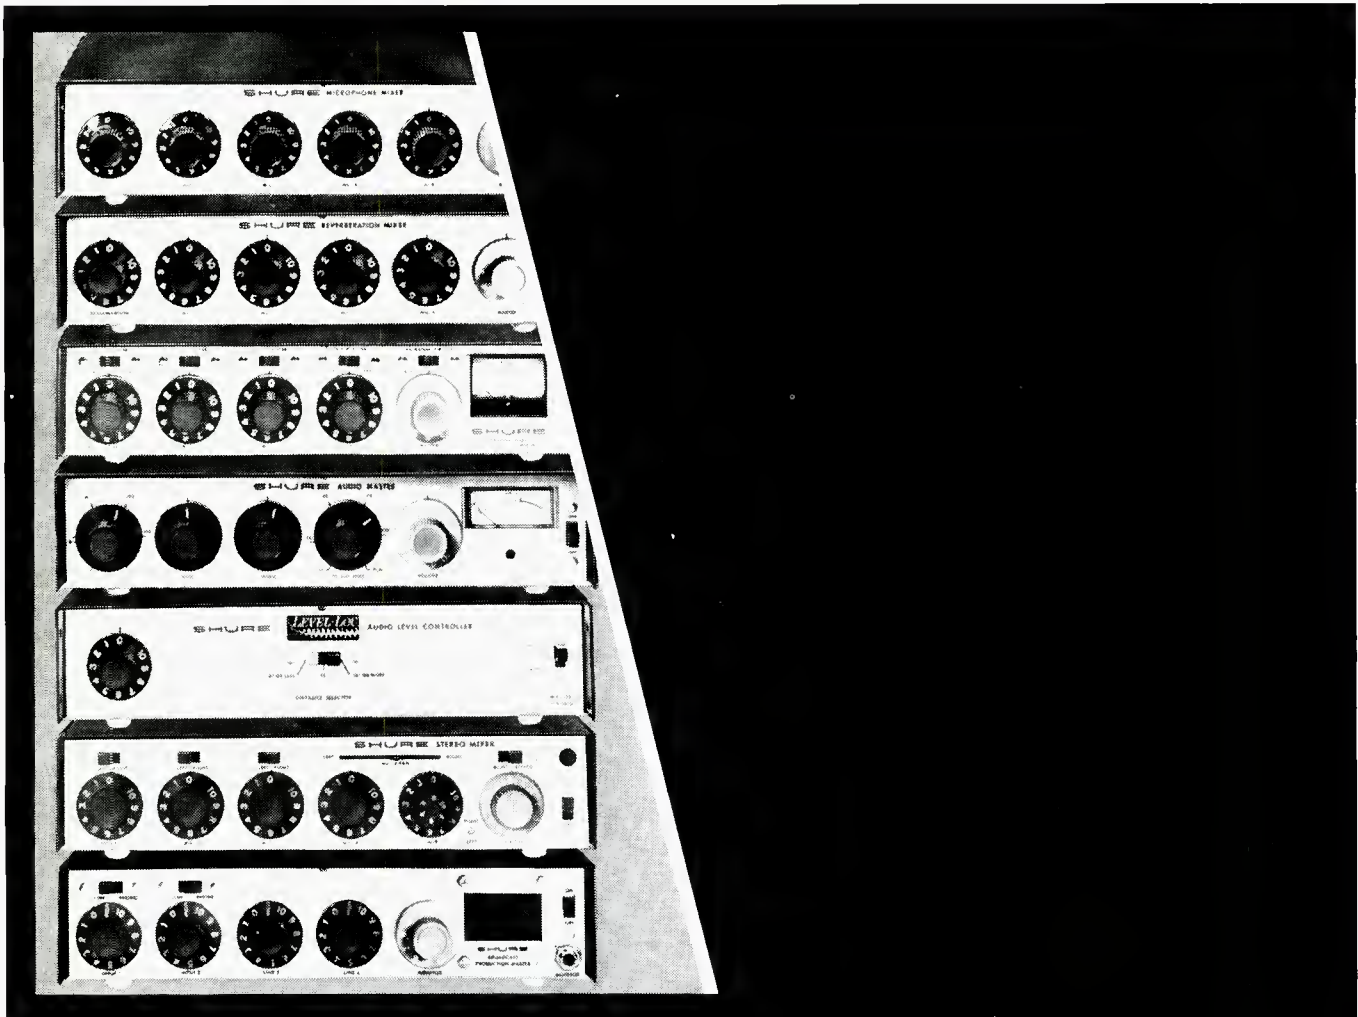

The Magnificent Seven



We've been hearing unsolicited rave reviews from soundmen across the country concerning our seven ingeniously versatile problem-solving audio control components (1) *M68 Microphone Mixer*, vanguard of the low-cost, high-performance portable mixers; (2) *M68-RM Mixer*, with built-in reverb for vocalists and special effects; (3) *M67 Mixer*, the trail-blazing low-cost professional mixer; (4) *M63 Audio Control Center*, that gives you variable response shaping; (5) *M62V Level-Loc*, the audio level controller that automatically limits output level; (6) *M688 Stereo Mixer*, made to order for stereo recording and audio-visual work; and finally, (7) *M675 Broadcast Production Master*, that teams up with our M67 to give a complete broadcast production console (with cuing) for under \$325. Write for the new Shure Circuitry catalog that shows them all:

Shure Brothers Inc.
222 Hartrey Ave., Evanston, Ill. 60204



Circle 30 on Reader Service Card
www.americanradiohistory.com

THE SYNC TRACK

Systems Reliability

● As this is being written, I have just returned from the sixth annual Audio/Recording Seminar at Brigham Young University where I had been invited to conduct the session on Control Room Engineering.

At a later date, **db** will have a detailed description of the seminar. In

this month's column, I'd like to dwell on at least one subject that came up during the seminar; *equipment*; or to put it more broadly, *systems reliability*. The subject came up almost as an afterthought towards the end of the class, and so we didn't have too much time to get deeply involved in

the pros and cons. Unfortunately reliability often comes up only as an afterthought, as Ralph Nader has been noting for so long.

Anyway, a day after the seminar ended, I was flying back to Fun City, thinking of all sorts of brilliant things to say, now that it was too late. Perhaps it was the altitude—at 30,000 feet, systems reliability is a very important subject. But even on the ground, a little more thought wouldn't hurt.

Which brings us back to the studio. (Well, what did you expect?) I suppose it an oversimplification to say that recording gear should have built-in reliability, *but* reliability costs money, and may not show up on the spec sheets in measurable terms. In fact, reliability judgments can only be made after the passage of time. If the equipment doesn't blow out (or up) we can eventually say it's reliable. Of course, with the obvious exception of new products, most equipment has been on the market long enough for some general consensus of reliability to have been formed.

Phase Linear 700: The critics lay it on...

"The world's best amplifier!"

W. R. Hickman,
High Fidelity Editor
Seattle Post-Intelligencer

"... in a class by itself"

Julian Hirsch, Stereo Review

"... a product for the all-out audiophile interested only in superlatives! ... performance is the most impressive we have tested."

Norman Isenberg,
High Fidelity

"Based on its sound quality only — regardless of price or power output — the 700 is in our opinion an excellent buy, and probably also a must with the majority of acoustic suspension loudspeakers and the new "hybrid" electrostatic reproducers so popular these days. At about \$1.00 per watt ... the Phase Linear 700 amplifier is probably the best bargain on the market today."

Editor, Hi Fi Newsletter

"An incredible instrument, really too good for home high fidelity use."


Collyn Rivers, Editor
Electronics Today

"... distortion ... was as low as we can go with the present equipment! There's no need to present a frequency response curve ... since it is perfectly flat ... to beyond the limits of our generator! Hum and noise figures were below anything we have encountered before. Breakup, as when an opera singer hits her high C, need never happen again, for now there is the Phase Linear amplifier and when that enormous reserve of power is needed, the 700 is capable of handling practically anything you care to feed it."

C. G. McProud, Audio

"WE WONDER IF 700 WATTS IS ENOUGH!"

Julian Hirsch, Stereo Review

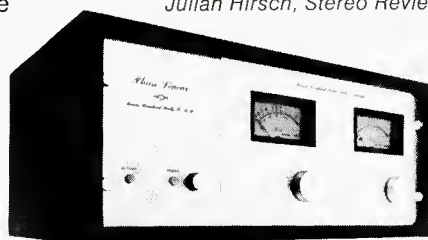

Phase Linear
CORPORATION
405 Howell Way, Edmonds, Wa. 98020

you write it

Many readers do not realize that they can also be writers for **db**. We are always seeking good, meaningful articles of any length. The subject matter can cover almost anything of interest and value to audio professionals.

Are you doing something original or unusual in your work? Your fellow audio pros might want to know about it. (It's easy to tell your story in **db**.)

You don't have to be an experienced writer to be published. But you do need the ability to express your idea fully, with adequate detail and information. Our editors will polish the story for you. We suggest you first submit an outline so that we can work with you in the development of the article.

You also don't have to be an artist, we'll re-do all drawings. This means we do need sufficient detail in your rough drawing or schematic so that our artists will understand what you want.


It can be prestigious to be published and it can be profitable too. All articles accepted for publication are purchased. You won't retire on our scale, but it can make a nice extra sum for that special occasion.



INTRODUCING THE FINEST PERFORMER ON ANY STAGE. THE TURNER TC10.

We've got it! A great new multi-port cardioid dynamic microphone. The TC10. It's the best you can buy, and we can prove it. In a series of carefully controlled tests, we ran the TC10 mike-to-mike against the top professional entertainment microphones in the industry. We got what we wanted—documented evidence that TC10 specifications meet or exceed those of any equivalent model. Results of these tests are available from Turner or the representative nearest you. See them and you'll agree. It's time for a change. It's time to try this remarkable new Turner microphone.

You'll get a multi-port cardioid dynamic with each component individually selected. Featuring: —26 db front-to-back discrimination on an axis of 180°, a frequency range of 50-15,000 Hz with an extremely flat response. —55 db output level. 150 ohm impedance. A unique acoustic cartridge mount which virtually eliminates shock and handling noise. Each TC10 is numbered, registered and packed in a handsome metal carrying case with its own individual response curve. Find out more about the TC10 and the rest of the high-quality TC series. Write for details. Turner Division. Conrac Corporation. 909 Seventeenth Street N.E., Cedar Rapids, Iowa 52402.

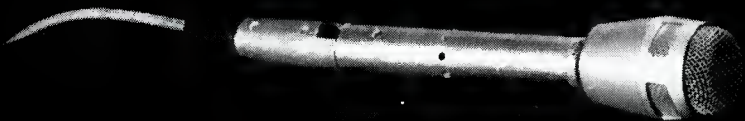

TURNER
DIVISION OF CONRAC CORPORATION

For example, some time ago we solved one of our little reliability problems with monitor amplifiers. We had a quantity of very inexpensive amps with very impressive specs. And, in practice, the amps fully met their published ratings. Just one little problem though—they had an uncomfortable way of dying when one least expected it. Also, lifting an input or output was a virtual guarantee that they'd go up in smoke.

So, we installed a bunch of Crown DC-300 power amps. End of problem. The darn things are indestructible, and Lord knows we've tried hard to do them in. They also cost about three times as much as the old unreliaables. But, it doesn't take too long to realize there's no savings in buying unreliable amps. Trouble-shooting any system, you proceed by eliminating—one by one—the probable failure points. The fewer there are, the quicker and easier the trouble shooting.

A month or two ago, I mentioned how sealed relays had cut down our failure rate. On a larger scale, the DC-300 amps have reduced our monitoring problems to zero. That's worth a lot of money. In fact, it seems we can easily afford the Crowns. It's the others that we can't afford.

Another frequent reliability problem is headphones. In any studio,

phones are bound to get a lot of abuse. There's just no way to prevent them from getting dropped, kicked, or just plain stepped on.

Sometime ago, I talked to the Koss people about the need for a "studio proof" headphone. They were interested in working on this problem, and we began by buying a small quantity of their *red-devil* phones (model KRD-711). Then every time we managed to break one, we'd send it back for analysis. In a very short time, they came up with the phones we now use—a modified version of the 711. The phone uses a steel-cased Switchcraft plug, and an extra-durable coil cord with improved strain relief where the cord enters the ear piece. We've been using them now for over six months and have had no failures. No doubt they will last a lot longer, but from past experience I know that six months of studio use is a long time.

Studios interested in trying these modified phones should contact Joe Kotowski at the Koss factory in Milwaukee, Wisconsin for price and delivery information.

While on the subject of headphones, it seems that every studio has its own method of supplying a headphone feed to the musicians. Our system is not ultra-sophisticated by any means, but it works well and is *reliable*.

Stereo phones generally use three

conductors, common, left, and right. Since we supply a mono feed to our two cue lines, we use the left and right conductors only. The ground is unused, and so, its only function is to connect the left and right earpieces together—in series—thereby doubling the total impedance of the phone. Since the Koss phones mentioned above have an impedance of about 250 ohms for each earpiece, this makes the impedance 500 ohms per phone. Even with twenty phones connected in parallel, the total impedance is a safe 25 ohms. Note that the phones themselves do not require rewiring. The only modification required is at the amplifier. Simply connect the left and right conductors to the amps' two output terminals and you're in business.

As a safety measure, we've inserted a 10-ohm power resistor in one of the conductors, so that momentary shorts—as phones are plugged in and out—do not affect the amp. We use a stereo amp, the Crown D-40, with each side of the amp driving its own phone feed. The sight of a Crown amplifier driving a headphone system raises an occasional eyebrow on visiting engineers; but again, the old reliability factor must be considered. The combination of the Koss phones and the Crown amp has reduced our cue line problems to zero. What's that worth?

Let's get back to the subject of relays for a minute or two. Sealed units are more reliable than the non-sealed variety. Enough said. But, what about the reliability of the circuit in which the relay functions? It's a common practice to connect one side of a relay to the power supply, with the other side connected—via a length of wire—to a switch. Closing the switch grounds the length of wire and actuates the relay. The logic (?) of this convention is that if the length of wire is accidentally grounded anywhere along its length—for example, a short circuit—the power supply will not be damaged. The only thing that will happen is that the relay will become activated. This assumes that the power supply is more valuable than whatever it is that the relay is doing.

But, is it? What if the relay is in the *record* circuit, and the accidental short has just erased the string track which was recorded a few weeks ago? If I had a choice, I'd prefer a situation where a failure would put a machine *out* of the record mode, rather than into it.

To me, a system that may destroy something more valuable instead of itself is not reliable. What does *your* tape machine do? ■

THE PERFECT MIX

Quick delivery. A most attractive price tag. And Studer quality.

That's the unbeatable combination you'll get with Studer's new 189 Mixing Console — now available in the U.S. for the first time.

This precision, Swiss-made instrument has 16 inputs on its 8-track board, and 18 on the 4-track version pictured, with EQ, cut-off filters, pan-pot, phase reversing switch, gain vernier

and linear attenuator.

Plus: 2 echo channels, one cue channel, 4 PDM limiter/compressors(!), monitor and talk-back amplifiers, Weston VU meters, and Phantom® powering.

The price? Just \$27,500 for the 8-track model; \$27,000 for the 4-track model. Take your pick. We can have the Studer 189 making perfect mixes in your studio next week.



Circle 42 on Reader Service Card

www.americanradiohistory.com

Relax, Engineers. The ES6000 will make you look good.

It will take very little of your time.

But it won't eliminate your job.



We introduced the Electro Sound 6000 32:1 tape duplicating system a year ago and have waited until we had enough field reports to verify this claim:

The ES6000 system at 32:1 is the same reliable workhorse that our 4000 system at 16:1 has been throughout the world since 1966.

The 6000 is neither temperamental nor delicate, and doesn't need the kind of coddling and tender loving care that engineers must lavish on some other systems to keep them operating properly. It just keeps rolling out first-rate tapes shift-after-shift, day-after-day, leaving the engineer with more time for his other duties.

We don't really put you people out of work, though. There are still plenty of top flight (and smiling) engineers at CBS and EMI, where some of our first 6000's went. But the 6000 is working just as well for smaller independents like Southeastern Records in Hialeah, Florida, and Teal in Johannesburg, South Africa.

In addition to its hardy reliability, here are some of the other attractive features the ES6000 offers you.

32:1 speed

Cue tone injector system

Constant tape tension

Modular plug-in record and reproduce amplifiers

Crystal control bias generator with 2MHz frequency

Plug-in replaceable ferrite heads for easy convertibility from 8-track to cassette duplication

Continuous loop assembly with loop bin capacity of more than 2,000 feet (more than enough for a C-90 cassette)

Compatible ferrite heads available for "Quad eight" and standard eight duplication

Dolby noise reduction system can be used with the ES6000

We also have those terrific Electro Sound winders and splicers.

AUDIOMATIC CORPORATION
237 West 54th Street, New York, N.Y. 10019
(212) 582-4870 Cable: AUDIOMATIC
Telex No. 12-6419

Worldwide distributors of Electro Sound tape duplicating equipment and accessories

A POWERFUL PAIR EXPOSED BY MCI!

TALKBACK MIKE

METERS LIGHT

Activates if track meters 9-16 are being used to monitor tracks 17-24. (See tracks meter select.)

TRACK METERS

Tracks 17-24 share meters with 9-16 (See tracks meter select)

CONNECTOR BLOCKS

On rear covered by metal back panel provides hidden connections for all inputs and outputs

SUBMASTER TRACK GAIN

Provides track attenuation during recording when many inputs are mixed together and mix must be held while the group is attenuated.

TRACK SELECT

Permits each input to be fed into any of the 16 summing busses which then feed the first 16 tracks. The direct button on each strip feeds the module input directly to its track output.

CUE AND ECHO LEVELS

These 4 busses are identical and may be used interchangeably. (See also master echo and cue levels.)

ECHO SWITCH

This button connects echo to the output of the equalizer (thus only the single input can be used.) Instead of the monitor booster. (any signals entering the track are used.)

0 DUB SWITCH

Defeats board status command and places module in mike status. A red light indicates use of this button. (See status switches.)

SOLO SWITCH

Routes its track signal to the control room monitor without disturbing program circuits. It can be used during recording.

MONITOR AND PAN CONTROLS

The monitor fader controls the percent of track output sent to quad busses. In remix status the fader controls tape return level. The pan control provides L-R panning through a front-back mute switch.

EQUALIZER

H. F. EQUALIZATION is through a 2 frequency select push button and 11 position $\pm 12\text{db}$ shelf with center off.

MID RANGE EQUALIZATION is through a 12 frequency select switch and an 8 position $\pm 14\text{db}$ shelf with an off position.

LOW FREQUENCY EQUALIZATION is through a 2 frequency select push button and an 11 position $\pm 12\text{db}$ shelf with center off.

MIKE TRIM

Provides 24-50db mike gain through an extremely low noise amplifier with balanced transformer input.

ILLUMINATED CONDUCTIVE PLASTIC FADER

Is in front of the equalizer circuit and will accept its input either from the mike preamp or tape. (See status buttons)

PLEATED AND ROLLED 6" ARMREST

SOLO LIGHT

Activates if any solo buttons are pushed.

4 ECHO RETURNS TO QUAD MIX

Each channel has 20db boost, level control and pan controls identical to an input strip. They feed directly into the quad mix busses and each also has a solo button.

SUBMASTER CUE AND ECHO

These permit adjustment of cue mix levels and echo mix levels.

ECHO RETURN TO TRACKS

Provides level control on 20db boost amplifier 16 track selects, solo, and cue feeds for one echo return.

OSC. SELECT

Permits oscillator feed from patch bay to the 16 track busses or the quad mix busses.

SLATE SELECT

Permits slating signal to be fed to 16 track busses, or quad mix busses.

MIKE LEVEL CONTROLS

For talkback, slating, and communicate.

TB MIKE BUTTONS

Conveniently located near arm rest and just off center of console. The **TALKBACK BUTTON** feeds slating and the studio monitor while feedback the control room to prevent feedback the **COMMUNICATE BUTTON** feeds only the cue busses. It can be used during recording.

When you buy MCI's new JH-416 mixing console—priced at a phenomenal \$19,500 for the 16-track model — you'll have enough money left over to buy our JH-16 recorder (\$16,500) . . . and still be paying less than what you'd expect for a comparable mixing console alone. Expandable to 24 tracks (total: \$25,100), the JH-416 makes possible a complete studio package of heavy hardware at

unheard-of savings. And to save even *more* consider starting out with an 8-track version of the JH-416 (\$13,900), which you can build on later.

We'll match our console—its specifications and functions — with any competitive model, even the \$40,000-and-up jobs.

Recorder and mixer — together, a powerful pair from MCI.



4007 N.E. 6th Avenue
Ft. Lauderdale, Florida 33308

QUAD METERS

Continuously monitor the quad mix busses.

2 TRACK METERS

(See meter selector)

POWER SENSE LIGHTS

Sense any bipolar voltage imbalance or failure and gives warning to operator.

MONITOR SELECT

The studio and control monitor have independent selectors, both given the choices of: Mono Tape; 2 TK Tape; Aux 1, 2; Cue 1, 2; Echo 1, 2; 2 Track Mix; Quad Mix; and Quad Tape Return.

The control room monitor has quad output. The studio monitor comes with 2 TK output. A quad studio monitor is also available. The studio also has automatic muting when 2 TK or Quad Mix is monitored while the console is in mike mode.

2 TK METER SELECT

Feeds the left and right channel meters. The selection is: Mono Tape; 2 TK Tape; Aux 1, 2; Cue 1, 2; Echo 1, 2; 2 TK Mix; Quad Tape Front; and Quad Tape Rear.

240 JACK PATCH BAY

Provides interface for inputs, outputs, and inner electronics.

MONITOR MODE SELECT

These determine whether the monitor acts as mono, 2 channel or quad output. In addition, the control room monitor also has a 1-2 speaker switch used in mono mode.

STATUS BUTTONS

Three buttons which feed transistor drivers providing non-transient operation of status and mix relays in each module thus programming the console in 3 conditions. (The following gives electrical flow through 1 input module.)

MIKE STATUS — Mike signal routed through preamp, patch bay, conductive fader, equalizer booster, solo and assignment buttons, submaster level control, track summing amplifiers to the patch bay and out to tapes and also to the monitor level quad mix and echo, cue busses.

TAPE STATUS — identical to the first except tape return signal is routed to the monitor level by a status relay. This allows a multi track master to be played through the same mix circuits used to monitor track feeds during recording.

REMIX STATUS — routes the tape return from patch bay through the main fader, equalizer, quad pan, and cue, echo feeds. (Also see o-dub button)

TRACKS METER SELECT

Switches track meters 9-16 to tracks 17-24.

MONITOR LEVEL CONTROLS

The **CONTROL ROOM MONITOR** comes with a 4 channel rotary fader. The **STUDIO MONITOR** comes with a rotary 2 channel or 4 channel fader.

REMOVABLE PANEL

Acts as writing surface but can be removed and replaced by optional metal insert for your custom electronics.

QUADMASTER FADER

Fades quad mix, stereo mix and mono mix.

LOG RESET BUTTON

Sets beginning of tape location at position of tape when pushed.

AUTO-LOC BUTTON

Activates auto-locate function.

REMOTE CONTROL

This unit is furnished with the recorder. It houses 16 sets of illuminated mode switches — ready, overdub, & safe. The remote also houses a complete set of deck motion controls. The entire remote-auto-locator package is less than 8"H X 12"W X 5"D. Sophisticated logic activates automatic individual/master input monitor switching.

THREE TAPE HEADS

Are quickly removable for easy 8-16 conversion. All connectors are on top of the deck.

AUTOMATIC SHIELDS & TAPE LIFTERS

Can also be manually controlled.

CONSTANT TAPE TENSION

Electronic control maintains constant tension at all reel loading situations

MCI AUTO LOCATOR

An optional accessory which can be connected to any JH-16 in the field. The auto locator permits automatic return to any two starting points. A 99 minute, 59 second clock is also contained in the auto locator.

DISPLAY BUTTONS

LOG — Brings Log count into auto locator counter after using "O" or clock functions.

"O" — Resets auto locator counter to current tape position while not affecting log count.

CLOCK BUTTONS

ON — Turns on clock and switches digital display from auto-loc to clock.
RUN — Starts and stops clock.

RECORD AND INPUT LIGHTS

Over each track meter.

16 VU METERS

Furnished on all machines. All mainframes are fully wired and tested regardless of head configuration.

CONTROL CARDS

House adjustments for reproduce, overdub, and record levels.

NOISE GATE

An optional accessory which plugs onto Control Cards. The noise gate reduces channel noise to >80 DB when program material is not present.

FOLD-OUT ELECTRONICS RACK

Permits easy access to all wiring and rear of card connectors.

ALL METAL CABINET

Finished with mar-resistant poly — urethane paint and woodgrain vinyl. The front, top, and back open for servicing.

CASTERS

Designed for use on thick carpeting of recording studio floors

BIAS AMPLIFIER CARDS
House the adjustments for erase, bias and bias calibrate.

VU METER SWITCH
Switches VU meter to read bias level.

REPRODUCE AMPLIFIER CARDS
House a plug in equalizer with adjustments for fast & slow speed, high & low frequency equalization.

RECORD AMPLIFIER CARDS
House a plug-in equalizer with adjustments for fast & slow high frequency equalization and record calibration.

SOUND WITH IMAGES

Think quiet

● Speaking of ecology, and who isn't these days, a recent public exhibit gave visitors brief lessons in sound, provided interesting facts and ideas for better mental and physical health, visually demonstrated and offered helpful advice on the subject of what to do about a most serious form of pollution—noise.

Noise itself is not of recent origin, of course, nor is it strictly American. In fact, according to information available at this display, Julius Caesar was so bothered by noise that he outlawed chariot driving at night; Charles De Gaulle banned by law transistor radios in public places; the hearing ability of some of the young rock musicians of today has deterior-

ated to the level of that of a 75-year old man; and a tribe in the quiet regions of the Sudan has been found which has 75-year old men with hearing capability of a 25-year-old American man.

The temporary exhibit, "Think Quiet: The Sound Show," was set up by the Owens-Corning Fiberglas Corp. at their New York headquarters for the purpose of presenting to the public the benefits of sound and the detriment of noise. To do this, live demonstrations, visual exhibits and "hands-on" displays provided to give the visitors an understanding of some of the principles of sound, the meaning and dynamics of noise, and some possible means of controlling



Figure 1. The benefits of sound and the detriments of noise are illustrated. The demonstrator uses a variety of noisemaking devices including the giant mosquito, a sound cannon, and a household motor.

this rapidly growing menace.

First, people were invited to take a hearing test. Different tones at various levels of loudness were reproduced from tapes played on three LaBelle Repeater units. A brief explanation of how the ear works was given, and a short description of what sound is and how it is measured was also presented, with the introduction of the term dB. A booklet gave a short discussion on sound terminology and the characteristics of loudness. It was also shown that high-pitched sounds were far more noticeable than low-pitched ones at the same decibel level giving rise to a relative weight difference described by the term dbA.

A film was then shown at the next display which gave the viewer a three-minute wrap-up of a 24-hour period recorded and filmed on the corner outside the building in which the exhibit was taking place. The intersection is an extremely busy one and is intensely noisy during the normal work day, but the sound level drops dramatically during the night, although never quite down to the level of quiet. The display then discusses the physiological and psychological dangers inherent in this type of disturbance. Aside from hearing loss, the body reacts to noise in other ways. A sound of even moderate level and short duration can cause the brain's blood vessels to dilate while the exact opposite is true in other parts of the body. Blood pressure rises, heart rhythm changes, pupils of the eyes dilate and even the stomach changes its rate of acid secretion. Excessive noise has been related to stress-caused ailments such as heart disease, ulcers and indigestion. Steady noise has been found to bring on tension, nervousness and irritability which in turn may cause fatigue, depression and inefficiency.



... in the great northeast!

audiotechniques, inc.

121 hamilton avenue
stamford, conn.

- sales • service
- installation • leasing

"Just 45 minutes from Broadway"
... is audiotechniques, inc.,
your headquarters in the Northeast for MCI
and all your pro audio requirements.

From Virginia to Maine,
we service what we sell!



See us at the Fall A.E.S.
(Booths 44, 45, 54, 55)

audiotechniques, inc.
121 hamilton ave.
stamford, conn. 06902
(203) 359-2312



The AR Laboratory Standard Transducer

**A speaker for professional use
from Acoustic Research**

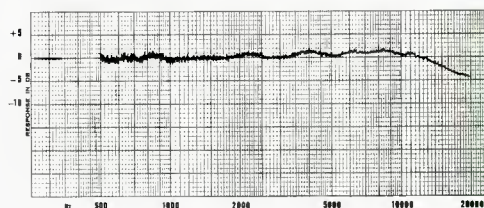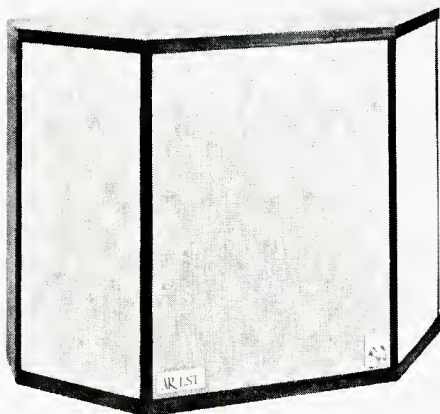

ACCURACY AND FLEXIBILITY: The AR-LST offers a total of six different energy profiles — all accurately known and repeatable at the turn of a switch, which is located on the front of the cabinet. This permits a degree of control and precision that is usually found only in electronic equipment.

FLAT ENERGY CAPABILITY: The AR-LST is capable of a flat energy output characteristic that, in our judgement, establishes a new state of the art. The graph shown above represents the acoustic power output produced by the AR-LST with its control set to the "flat" position. The horizontal line below 500 Hz indicates the relative woofer level.

LOW DISTORTION: As with the AR-3a, harmonic distortion measurements down to the lowest audible frequencies are, to the best of our knowledge, the lowest of any loudspeaker system available.

WIDE DISPERSION: AR's hemispherical dome tweeters produce exceptionally smooth, wide dispersion of midrange and high frequencies, even in rooms or studios that are acoustically rather dead.

POWER HANDLING: Multiple drivers for midrange and high frequencies enable the AR-LST to handle power levels significantly higher than AR's finest speakers designed primarily for home use.

Detailed information on the AR-LST is available on request. Mail the coupon below.



Acoustic Research, Inc.

24 Thorndike Street
Cambridge, Massachusetts 02141, Dept.

Please send the booklet describing the AR-LST to

NAME _____

ADDRESS _____

INSTANT PHASER



Over 1200 degrees of phase shift

Built-in variable frequency oscillator

Internal envelope follower

Remote control capability

Stereo output

Compatible with Moog and Arp synthesizers

Automatic-manual operation

EVENTIDE CLOCKWORKS

285 WEST 54 STREET

NEW YORK CITY 10019 (212) 581-9138

Circle 38 on Reader Service Card



Figure 2. A guest listens to noise as heard in different locations and is told what is being done to control it.

The frustration of failing hearing was aptly demonstrated in small telephone-type booths. The listener was told a joke beginning at a normal level of 60 dB. With each succeeding line, the level was dropped 10 dB. Some visitors found that defective hearing is no laughing matter. The full joke was repeated at full volume for those who missed the punchline, but the point of the exhibit had been made.

Farther into the exhibit, a live demonstration gave a more detailed explanation of the car and its function with a large plastic model. The motion of sound waves through the air was shown with a large "sound



Figure 3. The difference between a noise treated dishwasher and a conventional one is illustrated.

cannon," a drum which, when struck with a mallet, caused a row of streamers hanging at some distance away to ripple. An "electronic Caruso," a single-pitched voice on tape, was played loudly enough to shatter a wine goblet and thus illustrate the destructive power of sound energy. A screaming baby, also on tape, was played at four levels of intensity to demonstrate how disturbing this sound can become in the close living conditions of a large city apartment house built without the proper sound-deadening precautions. In a similar vein, another display illustrated simply with a doll walking on a roof of a house, how this would sound with and without sound isolation. A microphone was used to pick up the noise and feed to an amplifier and speaker to enhance the effect.

In a contemporary appliance-filled kitchen exhibit, different electrical household devices could be activated by the visitors with the relative sound levels indicated on a screen. It was shown quite forcefully that with all the labor-saving devices working simultaneously the noisiest room in the house reaches the level of a factory.

Photos, tapes and slides indicated the types and levels of noise that are developed each day in the office and on the road, at construction sites and in plants and factories, and in various means of transportation such as subways and airplanes. Methods for cutting down on some of the noise were given and demonstrated. Practical and inexpensive suggestions such as how to quiet an ordinary dishwasher for about \$2.00 and a garage door for about \$5.00 were offered.

In another part of the display, four slide projectors, each with drums containing 80 slides, were used in rear projection among photographs and charts to illustrate how noise is created and what can be done to control it. Simple solutions from quieter garbage cans in the street to use of carpeting, as well as wall and ceiling

TIMEKEEPER

XEDIT-2

THE XEDIT-2

the finest 2" tape splicing block you can buy

- Small holding ridges will not crimp the tape when it is removed
- Razor blade fits snugly—makes a straight, neat cut
- Tough aluminum alloy with clear, anodized finish
- Custom-machined to extremely close tolerances
- Cork backing—no slippage
- 7" x 3" x 3/4"

Sold exclusively by TIMEKEEPER on a 100% money back guarantee. You must agree that this is the best 2" tape block you have used or you may return the unit for a full refund.

N.Y.S. residents add 6% sales tax

Price: \$80. postpaid

(45° cut is optional at \$5 additional)

TIMEKEEPER

P.O. Box 835 Great Neck, N.Y. 11021

TIMEKEEPER TAPE TIMERS back in stock!

The well-known TIMEKEEPER TAPE TIMERS are now available for immediate delivery. Our latest shipment has arrived and we are ready to fill your order.

TIMEKEEPER TAPE TIMERS are easily mounted on any 1/4-inch recorder. They are fully guaranteed to meet with your complete satisfaction or your money will be promptly refunded. At these low prices you can no longer afford to be without a tape timer.

Difference from the Stop-Watch

Since the stop-watch measures time independently of the travel of the tape, its measurement inevitably varies with the elongation or contraction of the tape and with the rotating speed of the tape recorder, subject to change by voltage and other factors. The stop-watch can be stopped during the travel of the tape, but it cannot rewind together with the tape back to the desired position. With the Tape Timer moving in unity with the tape recorder, fast forwarding of the tape involves the quick advance of the pointer, while rewinding of the tape moves the pointer backward by the corresponding time.

Correct time keeping of the Tape Timer is never deranged by continuous repetition of such actions during the travel of the tape, as stop, rewinding and fast forwarding. Unlike the stop-watch, the Tape Timer is not affected by various factors of the tape recorder, and so the editing, reproduction and revision of your recorded tape can be done at will.


Features

- The recorded portion of the magnetic tape can be read at a glance by a scale division of 1/4 second as accurately as a clock.
- The performance of the Tape Timer synchronized with the tape prevents such errors as caused by the elongation or contraction of the tape, and by the variation of speed in the rotation of the machine. Fast forwarding of


the tape involves the proportional increase of the advance on the Tape Timer. When you rewind the tape, the pointer will be automatically moved back by the space of time exactly corresponding to the rewound length. You are free to stop, rewind, fast forward, or forward the tape even continuously and repeatedly without deranging the timing on the machine, thus prohibiting errors. These excellent characteristics will enable you to simplify the most complex procedure of editing, revising and otherwise processing your tape recording.

- Every fast rotating part is provided with a precise ball bearing, so that the Tape Timer can be employed at high-speed with no need of lubrication.
- This trouble-free, high precision Tape Timer, within an error of 2/1000, can be simply fitted to any recording or editing machine.

Two models are available:



The Standard Model is calibrated for 7.5 and 3.75 ips and can also be used at 15 ips. Dimensions are 1 7/8" x 3 1/4". It is priced at only \$49.95.



The Professional High Speed Model is calibrated for 7.5 and 15 ips. It measures 2 1/2" x 3 1/4" and is priced at \$99.95.

TIMEKEEPER P.O. BOX 835 GREAT NECK, N.Y. 11021

Name _____

Address _____

City _____

State, _____ Zip. _____

Please send _____ Professional Tape Timers at \$99.95 each.

Please send _____ Standard Tape Timers at \$49.95 each.

Total for Tape Timers \$ _____

N.Y. State Residents add 7% Sales Tax \$ _____

Add \$1.00 shipping per order \$ _____

Enclosed is check for \$ _____

DIGITAL DELAY LINE



Standard Features

- 200 milliseconds delay
- 2 outputs
- Better than 66 db dynamic range.
- Frequency response 20 Hz - 15 KHz

Optional Features

- Expandable to 800 milliseconds
- Unlimited number of outputs

EVENTIDE CLOCK WORKS

285 WEST 54 STREET

NEW YORK CITY 10019 (212) 581-9136

Circle 43 on Reader Service Card

insulation materials in the home, to the more complex ones which utilized rubber wheels on subway cars in Montreal and Mexico City, were presented. Means to quiet household devices, the use by the construction industry of quieter hydraulic pavement breakers at some building sites and the application of sound absorbing materials in the construction of the latest jet engines so that they are ten times as quiet as some smaller aircraft were also mentioned.

Some of the interesting and vital facts depicted at the show indicate that the noise level in the United States is doubling every ten years; an estimated 16-million people in the country suffer from some degree of hearing loss directly caused by noise; and that industry is paying \$4 billion a year in accidents, absenteeism, inefficiency, and compensation claims directly attributable to noise in the office and factory environments. Recently, state and federal government agencies have begun acting to try to control noise. The first state-wide noise control legislation was signed into law in January, 1972, in New Jersey. This law allows the setting of noise level standards for mechanical

devices from construction equipment to automobiles, with violations liable to fines up to \$3,000.

The main purpose of the exhibit was to help each individual do something to help in the fight against noise pollution. Four steps, generally, were indicated as possible ways of alleviating some of the noise. These are to move the source, absorb the noise, block it, or reduce it. Noise from typewriters, washing machines, dryers and dishwashers can be cut down by rubber mounting and insulation. In addition to drapes and carpeting in the home, moderate level in the playing of the t.v. and hi-fi can also help. Noisy cars might be quieted by tuning the engine or fixing the muffler. Each individual can also try to get codes and regulations passed by the various governments and then enforced wherever possible to help fight noise.

The entire exhibit was interesting in the facts that have been made available to visitors and also in the simple ways in which visuals of different kinds were used to demonstrate an aural phenomenon. Hopefully, the public came away with some understanding of sound and noise and the effects on the hearing of all of us, and a desire to do something about this form of pollution before it gets completely out of hand. Among the units of equipment used in the display were reel-to-reel Wollensak tape recorders, Bogen 100-watt amplifiers, JBL speakers, Kodak slide projectors and Triangle 16-mm film projectors.

In line with the above demonstration of noise and its possible harmful effects, it might be interesting to mention that the federal government and NASA are looking into the problem of airplane noise during take-off and landing and have been for some time. Recently, a 300-representative conference took place in which the aircraft industry was informed of the latest results of the experimental quiet engine being developed by NASA, for use by commercial jetliners of the future.

Tests were made with microphones arranged in a semi-circle 150 feet from the engine during static running and the noise generated was measured. The total of four such engines mounted on DC 8/707 type aircraft would only be 90 EPNdB, compared with the present 116 EPNdB during take-off and 118 EPNdB during landing. The jet noise was reduced primarily by special construction in the engine and the fan to allow the exhaust air to exit with less noise being created than before. Noise was further reduced by the addition of Fiberglas sound absorbing material to the nacelle surrounding the engine. The



Figure 4. The sound cannon. The rope when pulled activates the mallet. It hits the drum sending sound shock waves through the air and rippling streamers hung a short distance away.

nacelle is designed to take care of the frequencies in the 2,000 to 4,000 Hz range. These have been found to be the sounds most easily perceived by the human ear and are therefore the most annoying as noise in this frequency range. The term EPNdB has, therefore, been adopted to describe these *effective perceived noise decibels* and is presently being used to measure the intensity of the noise in this limited frequency range, thus taking into account the characteristics of the normal ear. Maybe there's some hope for our hearing after all. Tomorrow the airplanes, the following day the rock music and transistor radios. Then the kitchen. ■

CONSULTANTS IN ARCHITECTURAL ACOUSTICS

specializing in

Room Acoustics
Sound Isolation
Sound System Design
HVAC Noise and Vibration Control

Auditoriums/Theatres/Sports Stadiums
Coliseums/Churches/Synagogues
Conference Rooms/Board Rooms
Concert and Recital Halls
Music Buildings


Service available with
collaborating consultants in

Audio Visuals
Theatre Technology

**Klepper Marshall King
Associates, Ltd.**
333 Old Tarrytown Road
White Plains, N.Y. 10603
(914) 761-8595

NEW PRODUCTS AND SERVICES

CONSOLES

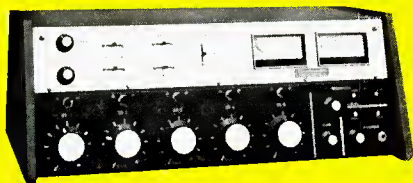


● A complete line of audio consoles, primarily for broadcast work, are available. They include mono and stereo models with five or eight channel inputs. All console mixing inputs are supplied with preamplifiers and with provision for use in low or high level application. Electronic f.e.t. switching of input channels to program and audition buses is standard.

Mfr: Spotmaster-Broadcast Electronics, Inc.

Price: \$775 to \$2950.

Circle 72 on Reader Service Card.

DELAY SYSTEM

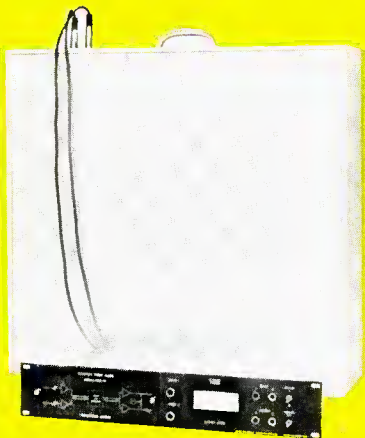

● The Cooper Time Cube is a dual acoustical delay system with two electronically independent delays of 16 and 14 milliseconds. Frequency response is ± 2 dB 40-10,000 Hz, distortion is less than 1 per cent at all program levels up to ± 4 dBm output. Signal-to-noise is greater than 70 dB. Applications are particularly appropriate for synthesizing quad tapes and records from two-channel originals, loudness or spacial enhancement of program, delaying feed to reverb chambers or devices for added dimension, and improving optical film recording by delaying audio to light valve or galvanometer (applicable to Westrex, RCA, Maurer, or other film recording systems).

Mfr: UREI

Circle 69 on Reader Service Card.

GRAPHIC LEVEL RECORDER



● This compact unit, the Justi-Meter III, has been designed to permit recording of the frequency-response characteristic of audio equipment on a chart. The linear range is 40 dB and the chart is frequency calibrated. The unit covers a sweep range from 20 to 20,000 Hz obtained from a (supplied) B & K Q-R-2009 test record. The sweep and plotting take 50 seconds. The chart starts automatically from the test record signal, and measures the response of phono pickups directly, and with external connections that of amplifiers, filters, and tape recorders. Two writings speeds, over 40 dB/sec. and approximately 12 dB/sec. are provided. A powered condenser mic input is also provided.

Mfr: Justi-Meter Corp.

Price: \$595.00

Circle 60 on Reader Service Card.

PEAK PROGRAM METER



● The M-900 is a relatively inexpensive peak reading meter with a linear dB scale from +9 to -36 dB. It makes possible an ability to operate close to the overload level without creating distortion. Important specifications include: voltage requirement is 24 V d.c.; current consumption is approximately 20 mA; input impedance is 10 k ohms unbalanced; indication linearity is ± 1 dB; integration time is approximately 10 ms; and fall back time is 2 seconds full scale (adjustable).

Mfr: NTP (Audiotechniques)

Price: \$110 (single units).

Circle 65 on Reader Service Card.

A professional 6 channel stereo mixer at a price everyone can afford. Noise -127 dbm. Output +20 dbm into 600 ohms. Integral VU meters. Switchable mic preamp gain. IC circuitry. 117 VAC or battery operation. Switchable low frequency rolloff. A B pots, Beyer and Triad transformers. See your dealer or order direct postpaid from Prokit.

\$29900

KIT

\$49600

WIRED

PROKIT DIVISION, GATELY ELECTRONICS

57 WEST HILLCREST AVE. • HAVERTOWN, PA. 19083 • 215-446-1415

Circle 49 on Reader Service Card

Be sure
to attend . . .

THE AUDIO ENGINEERING SOCIETY'S

43rd Technical
Meeting and
Exhibition of
Professional
Equipment
at the
Waldorf-Astoria
New York City
September 12-15

For details, write or phone:

AUDIO ENGINEERING SOCIETY

60 E. 42nd St., N.Y., N.Y.

10016 • Phone. 661 8528 . . . or

AES PROGRAM INFORMATION

124 E. 40th St., N.Y., N.Y.

10016 • Phone 661 2355

SERVO-CONTROLLED RECORDER

● The new 79 series audio recorders use a d.c. servo capstan system incorporated in the Isolooop differential drive system, enabling operation of the unit at variable speeds ranging from 5 to 45 in/sec—in addition to fixed speeds of 7 1/2, 15, and 30. Eight, sixteen, and twenty-four track configurations are standard with readily accomplished conversion upward of eight- and sixteen-track units. Space exists in the cabinet for noise-reduction units, remote transport and electronic controls are incorporated in the recorder's cabinet but may be removed for use at the console.

Mfr: 3M Company

Price: (approximate) \$15,000 8-track; \$20,000 16-track; \$29,000 24-track.

Circle 62 on Reader Service Card.



1/4-INCH, 4-CHANNEL

● Four track recording and play with Simul-Sync capability on each channel is offered on this new A-3340 model. It takes 10 1/2-inch reels and operates at 7 1/2-15 in/sec. A mixable mic and line input exists for each channel, making this unit a single-box field-recording system. Separate switches permit each channel to be activated for record, and switches on the head cover permit each channel to be switched from normal to Simul-Sync. In this latter position, the record head of the switched channel is used for playback, eliminating normal record-play head delays—and permitting synchronized additions to other channels. Important specs of the unit include speed accuracy of 0.5 per cent, three-motor operation with a dual speed hysteresis-synchronous capstan motor, flutter of 0.04 per cent at 15 in/sec with ± 3 dB response at that speed 30-20,000 Hz. Signal-to-noise is 60 dB harmonic distortion is 1 per cent crosstalk is 60 dB, and stereo separation is 50 dB—all at 1 kHz. Rewind time for 1200 feet is 90 seconds.


Mfr: TEAC

Price: \$849.00.

Circle 67 on Reader Service Card.



FAIRCHILD SOUND EQUIPMENT CORP.
A ROBINSON INDUSTRIES CORPORATION
75 AUSTIN BLVD., COMMACK, N.Y. 11725
(516) 543-5200

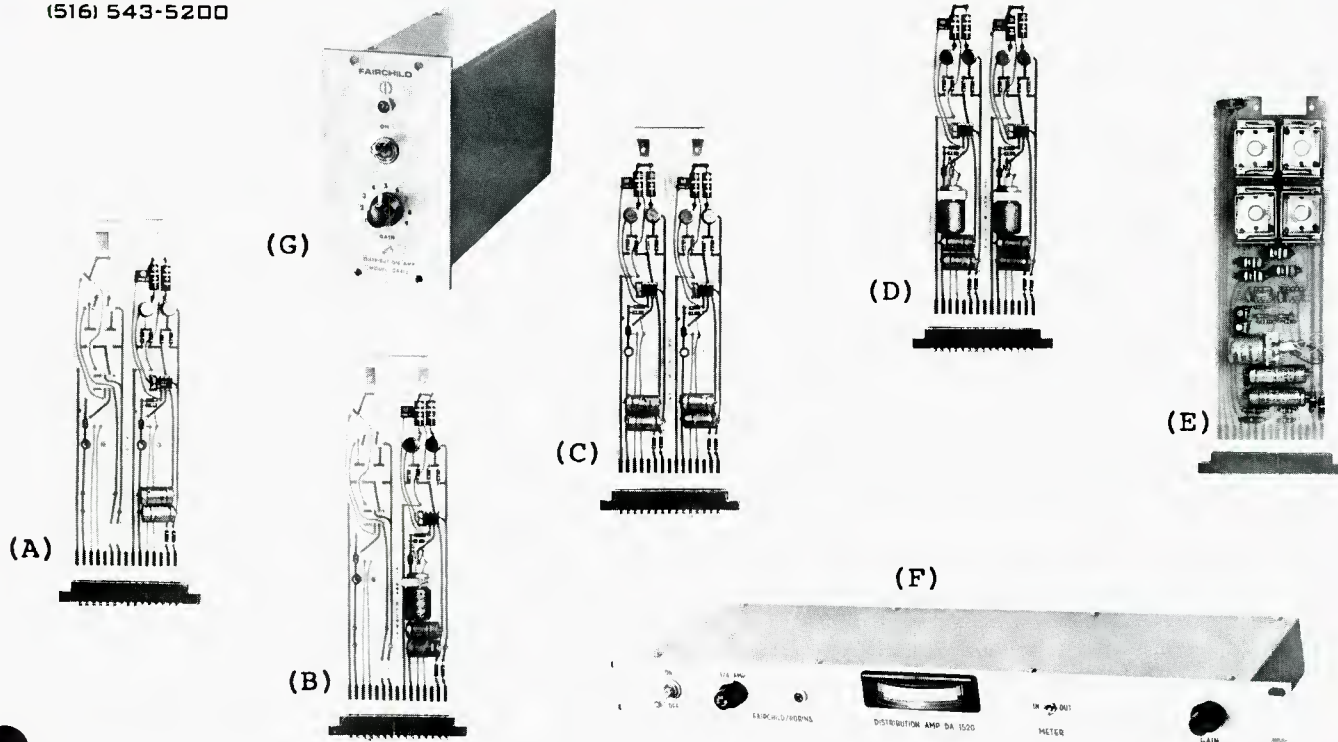

State of the art distribution amplifiers for use in broadcast and recording studios, PA systems, telephone networks, schools, etc. Features include card-file and rack mounting modularity and power supply compatability with all other Fairchild/Robinson circuitry. Low noise, high gain* transistor or IC op-amp circuits offer high stability, extremely low distortion, flat frequency response and overload protection, and almost nil crosstalk between channels.

These reliable economical units use heavy duty components for 20 year continuous-duty design life with low power consumption. Epoxy printed circuit boards with gold-plated contacts and mating P.C. connectors are supplied.

8 CHANNEL, Model DA415-8 (Illust. G) which operates on 117VAC consists of 8 separate Class A emitter follower isolation amplifiers whose inputs and outputs are accessible individually through a blue ribbon connector allowing for a variety of interconnections, including the distribution of a signal into 8 separate lines. Output circuits are used with reactive loads driving 600 ohm lines, which match transformers normally used in transmission lines, and telephone links. Unity gain enables direct input connections from high level sources such as consoles, tape machines, mixers and telephone lines.

The output stage has very low output impedance to work into resistive or inductive loads (important when feeding telephone lines through a transformer so that the Telco line impedance is bridging the output of the DA415-8).

The self-contained power supply has active filter and voltage regulator circuits, overload and short circuit protection, and very low ripple voltage. The gain control is used for common input to all amplifiers.

15 CHANNEL, Model DA 1520 (Illust. F) distributes an audio signal into 15 balanced lines. It mounts into a 19" rack, taking only 1 3/4" of vertical space and has a self-contained power supply for plug-in to 117 VAC line.

Output circuit of the amplifier consists of two sets of complementary symmetry current drivers with heavy negative feedback, assuring low distortion and low output impedance needed for channel isolation.

VU meter monitoring of input and output signals and gain is provided. All input and output connections are made through screw type terminals on a barrier strip, allowing for a variety of applications. Output level of the amplifier remains constant, regardless of the number of lines being fed by it. Input to the amplifier is balanced and isolated by an input transformer.

2 to 75 CHANNEL, Model 725DA5/T (Illust. E) is a high level, high power distribution amplifier which can also be used as a power amplifier to drive small cue speakers or as a line amplifier, etc. Each of two separate sections delivers 26 dbm signal into 600 ohm load. Combined power output is 36 dbm into lower impedance load. Delivers balanced output without use of transformer.

25 CHANNEL, Model 725LA (Illust. A) is a versatile basic modular amplifier which can be used as a line amplifier or distribution amplifier, delivers up to 27 dbm into 8 ohm load unbalanced.

25 CHANNEL, Model 725LA/T (Illust. B) is the same as 725LA but with matching input transformer.

50 CHANNEL, Model 725LAD (Illust. C) Two line amplifiers on a single card. Each amplifier similar to 725LA. Separate decoupling for each amplifier. Delivers balanced output without use of transformers.

50 CHANNEL, Model 725LAD/T2 (Illust. D) Same as 725LAD except with matching input transformers.

*except DA415-8, unity gain.

FAIRCHILD/ROBINS
 FAIRCHILD SOUND EQUIPMENT CORP.
 A ROBIN INDUSTRIES CORPORATION
 75 AUSTIN BLVD., COMMACK, N.Y. 11725
 (516) 543-3200



FAIRCHILD/ROBINS DISTRIBUTION AMPLIFIERS

Model No.	Illus.	No. of Amplifiers	Gain db	Input Imp. ohms	Output Imp. ohms	Max. Out-Put Level dbm	Load Imp. ohms	S/Noise db (0dbm out)	Freq. Resp. db†(a)	Interch. Crosstalk db min.	POWER REQ. VDC @ ma	Rec. Power Supply	L x H x D Dimensions	Assoc. Mtg. Hardware	
725DA5/T	E	1	5-40	10K	0.5	36	8eup	40	85	0.2	0.5	70	±15 20/120 (e)	667T/15 2½x7½(b)	725SCH or 725CF
725LA	A	1	0-25	100K	0.1	27	8min.	35	70	0.2	0.5	--	±15 120	667T/15 2½x7½(b)	725SCH or 725CF
725LA/T	B	1	20-45	200-600	0.1	27	8min.	55	71	0.2	0.5	--	±15 120	667T/15 2½x7½(b)	725SCH or 725CF
725LAD	C	2	0-25	100K	0.1	27	8min.	35	70	0.2	0.5	70	±15 120 (f)	667T/15 2½x7½(b)	725SCH or 725CF
725LAD/T2	D	2	20-45	200-600	0.1	27	8min.	55	71	0.2	0.5	70	±15 120 (f)	667T/15 2½x7½(b)	725SCH or 725CF
DA415-8	G	8	0	100(d)	10	15	600	0	75	0.3	1.0	70	117(AC)	45	-- 3½x5½x10 662RM
DA 1520	F	1	0-40	600	600(c)	20	600	35	70	0.2	0.5	70	117(AC)	40	-- 19x1-3/8x6 19"rack
(a) 20-20K Hz (b) Printed circuit board with gold-plated contacts and mating connector (c) All 15 outputs (d) Each amplifier, 12K ohms all inputs paralleled (e) 20 as line amplifiers, 120 as power amplifiers (f) each amplifier															

(a) 20-20K Hz (b) Printed circuit board with gold-plated contacts and mating connector (c) All 15 outputs (d) Each amplifier, 12K ohms all inputs paralleled (e) 20 as line amplifiers, 120 as power amplifiers (f) each amplifier

ARCHITECTS AND ENGINEERS SPECIFICATIONS: DISTRIBUTION AMPLIFIER

The Distribution Amplifier shall employ transistor or Integrated Circuit design. Vacuum tube circuitry will not be acceptable.

The transistors, Integrated Circuits and associated circuitry shall be assembled on glass epoxy circuit boards which shall have gold-plated contacts, and the entire circuit board shall be removable from its housing, if provided, for immediate inspection and service.

The frequency response of the Distribution Amplifier shall be ___ to ___ cycles, plus or minus ___ db. The gain of the preamp shall be ___ db.

The amplifier shall be capable of a power output of ___ dbm with distortion under ___ % at ___ cycles and ___ % at 1KC. Input impedance of the Distribution Amplifier shall be ___ ohms. A transformer may be used at the input for lower impedance requirements.

The output of the device shall be ___ ohms. The preamp shall operate from an ___ V. power supply at ___ ma.

The physical dimensions shall be ___ " x ___ " x ___ ".


The Distribution Amplifier shall be the Fairchild/Robins Model ___.

MASTERING TAPE

● A new low-noise mastering tape with a backcoating has been made available. The new oxide formula and binding system are stated to provide improved recording and play characteristics and greater durability. The 1-mil 407 series and 1.5-mil 406 series replaces the 444 and 434 series mastering tapes. Extremely fine ferric oxide particles are used on the new formulation to achieve a higher packing density, resulting in a 3.5 dB improvement in undistorted output capability over previous tape from this company. The tape is offered on reel sizes from 7-inch to 14-inch diameter, and on standard NAB hubs. Widths of 1/4, 1/2, 1, and 2 inches are available.

Mfr: Ampex Corp.

Circle 66 on Reader Service Card.

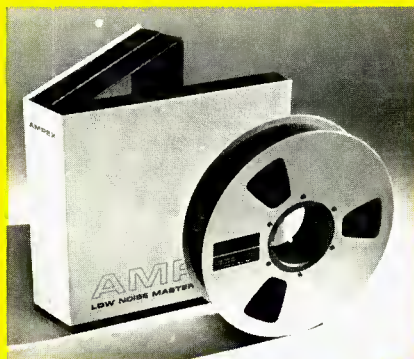


OSCILLATOR

● Model 700 is a plug in externally adjustable audio oscillator integrated circuit. It draws ± 24 V at ± 20 mA and will deliver ± 10 dBm at 0.5 per cent harmonic distortion. By changing resistance values to the add-on circuit (which requires two resistors plus an output pot of 1k) frequencies of 16 Hz to 15 kHz may be obtained.

Mfr: Opamp Labs Inc.

Price: \$35.00

Circle 61 on Reader Service Card.



MIXER/PREAMP


● This stereo unit is designed for clubs, small broadcast stations, school and background systems (with paging), and advanced music reproduction systems. It has two pairs of low-level RIAA-equalized inputs, two pairs of high level inputs, two mic/line inputs (mono) switchable to left, right, or both output channels. Used direct, the mic inputs are high impedance; with an A-1002C input card and CMA-481 input transformer is balanced low impedance. Line outputs are at ± 18 dBm each channel unbalanced. Each channel has its own equalization controls; there is a master gain control. A separate monitor output is available with its own level control. It is switchable to program or cue any of the four stereo inputs.

Mfr: Bozak

Circle 71 on Reader Service Card.



CASSETTE DUPLICATOR

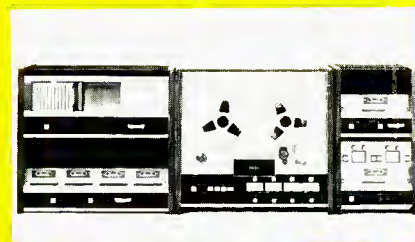


● High speed cassette duplication is accomplished by the System 200. It used modular units for maximum flexibility in meeting user needs. Open reel, cassette, and endless-loop masters may be used. Open reel and/or cassette slaves are options. There are fully automatic cassette slaves for unattended operation. New ferrite heads are used for long life and reduced cleaning maintenance. Other features include automatic rewind and cueing, defective cassette stop and indication, plug-in electronics with both digital and linear i.c.'s. All major tape formats—cassette, open reel, cartridge—can be duplicated.

Mfr: Infonics

Circle 63 on Reader Service Card.

AMPLIFIER CARDS

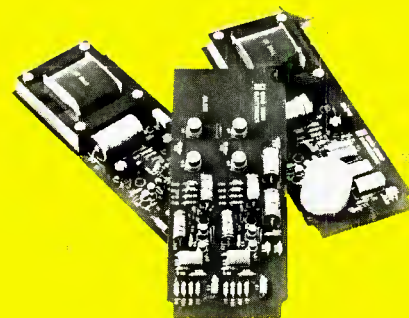

● The CA series are 2 3/4-inch by 7-inch printed-circuit cards designed for upgrading existing consoles. They include the CA 127, an operational amplifier input, +30 dBm transformer output, unity to 40 dB amplification; the CA 227 transformer input and output (+30 dBm), 30-60 dB of amplification; and the CA 272—dual amplifiers, op-amp inputs, single ended outputs (+24 dBm). All three boards have 150 per cent over-voltage and short circuit protection, distortion of 0.2 per cent harmonic from 20 Hz to 20 kHz, and low noise of -129 dBm for the CA 227, 110 dBm for the other two.

Mfr: Quad-Eight

Circle 68 on Reader Service Card.

UP TO

65 % SAVINGS

Plus performance that is creating excitement in Engineers around the country! "Fantastic sound" ... "Very Clean" ... "Superb!" ... Send two more ...

Proof? Our standard 10 day evaluation period lets you see and hear the performance and the full service. 2 year warranty demonstrates the reliability.

Place your order today. Then prepare yourself for a **very** satisfying experience!



TURNTABLE
PREAMPLIFIERS

MP-8 (Mono) \$60
SP-8 (Stereo) \$90

Outstanding sensitivity and near perfect reproduction. RIAA/NAB equalized .5 mv sensitivity @ 1 KHz for -4 dbm out — Balanced 600 ohm out — minus 65 db S/N ratio — .20 dbm out max — .1 db freq. response — Internal power supply — Table top/bracket mount. Shipping weight, 3½ lbs.



MIC/LINE AMPS

MLA-1 (Mono) \$68
MLA-2 (Dual) \$96

Dual function utility amp. Inputs for mic and/or line — 600 ohm balanced outputs — mic input. 65 db for -4 dbm out — .20 dbm out max. — .5 db response, 10 Hz-20 KHz — 0.1% or less dist. — Internal power supply — Tabletop/bracket mount. MLA-2, Stereo/Dual Mono. MLA-1, Mono. Shipping weight, 4 lbs.



DISTRIBUTION AMP
6 BALANCED OUT

DA-6 \$95

One third the cost of comparable units. Six 600 ohm balanced outputs — Balanced bridging input — 26 db gain — .20 dbm out max. — Input level control — 0.1% or less dist. — .5 db response, 10 Hz-20 KHz — Internal power supply — Tabletop/bracket mount — Shipping weight, 4 lbs.



TAPE CARTRIDGE
LOADER (AUTOMATIC)

ACL-25 \$159

Precision winding without guesswork. Dial in the minute and/or seconds desired, throw switch to run. That's it! The exact amount of tape is fed onto the cartridge hub to the second, and shuts off automatically. No waiting around, no guesswork and 1 sec. accuracy. Also has exclusive torsion control for proper tape pack and winding of various cart hub sizes. TTL digital control circuitry. Shipping weight, 30 lbs.



RAMKO RESEARCH

2552 "E" Albatross / P.O. Box 6031
Sacramento, Calif. 95860 (916) 489-6695

POWER AMPLIFIER

● The model 240 is a stereo power amplifier with 125-watts continuous power per channel over the 20-20,000 Hz range—with both channels driven simultaneously. Relay operated protective circuitry has been designed to prevent damage to output transistors, power supply, or speakers from excessive levels of subsonic frequency. Rack adapters or a walnut cabinet are available for a variety of appearance requirements.

Mfr: Marantz Co. Inc.

Price: \$395.

Circle 70 on Reader Service Card.



TAPE MAINTENANCE KIT

● QM-3 is a kit designed for maintenance of tape machines. It contains products designed to provide a preventive maintenance program to a recorder. Included are: QM-102, 2 oz. bottle of liquid head cleaner; QM-301, splicer for ¼-inch tape; QM-501, 150-inch roll of Mylar splicing tape; QM-201 wand head demagnetizer; and QM-502, 6-inch cotton tipped sticks.

Mfr: Nortronics Co. Inc.

Circle 74 on Reader Service Card.



X-Y RECORDERS

● Models 7044A and 7045A are two new general purpose chart recorders. Model 7044A is a medium speed recorder with a slewing speed of 20 inches per second, the model 7045A is faster at 30 inches per second. Input range of both instruments is from 0.5 mV to 10 V, floating 500 V d.c. or peak a.c. The writing area is 10 by 15 inches. Standard paper is used.

Mfr: Hewlett-Packard

Price: 7044A-\$1350; 7045A-\$1675.

Circle 64 on Reader Service Card.



SPEECH COMPRESSOR/EXPANDER


● The varispeech permits speech recorded on tapes to be played back at any speed between half and two and one half time original speed without affecting pitch or speech identity. It uses a standard cassette operating at variable playback speed. Signal processing is electronic, using no moving parts other than the normal tape motion.

Mfr: Lexicon, Inc.



Circle 73 on Reader Service Card.



LARGE CONSOLES

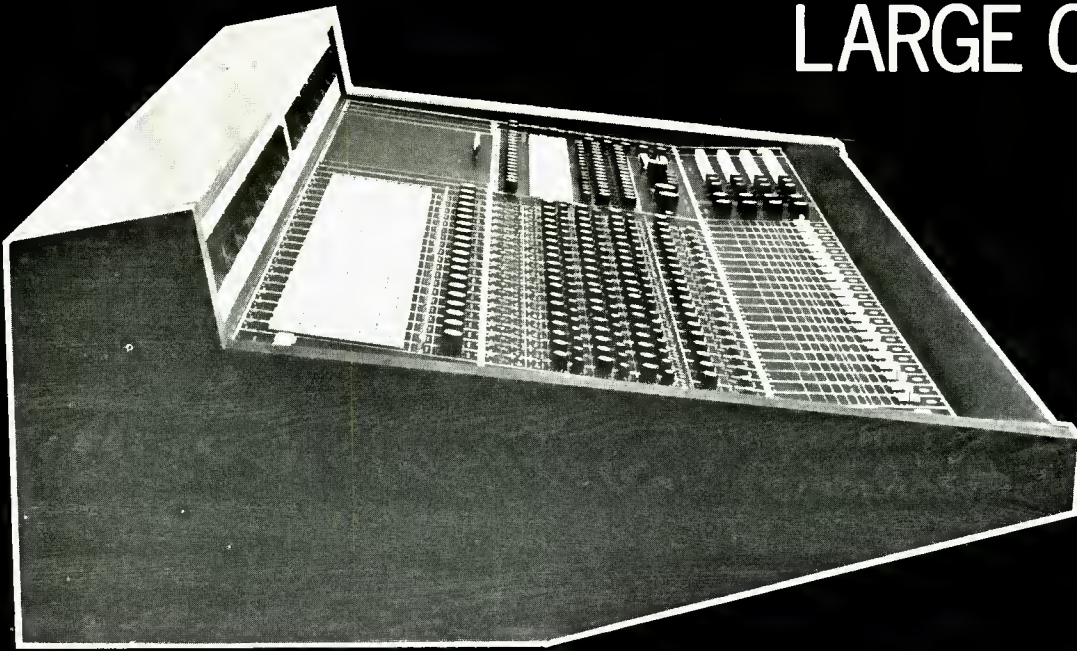

SMALL CONSOLES

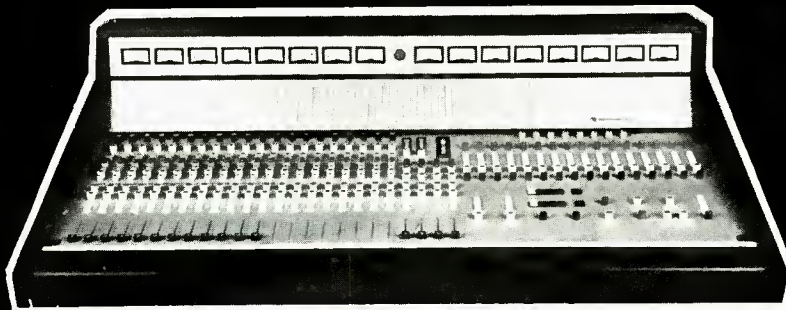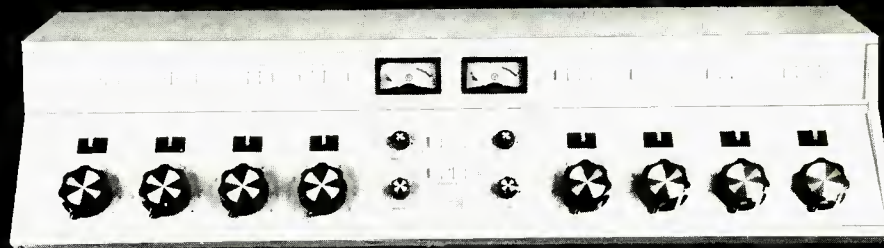

CUSTOM CONSOLES

Before you purchase your new console, think first of SPECTRA SONICS

QUALITY

Guaranteed to outperform any console in the world in noise, distortion, frequency response, and peak overload.

RELIABILITY

The Model 101 Audio Amplifier, the heart of all consoles, is guaranteed in writing by SPECTRA SONICS for a period of two full years against any defect.

For guaranteed performance and reliability in professional audio consoles contact SPECTRA SONICS at:

770 Wall Avenue
Ogden, Utah 84404
(801) 392-7531

6430 Sunset Blvd., Suite 1117
Hollywood, California 90028
(213) 461-4321

SPECTRA SONICS

LEADER IN ADVANCED TECHNOLOGY

Circle 1 on Reader Service Card

www.americanradiohistory.com



JOSEPH MARRONE


How About Some Automation?

Automation in varying forms is already available in the audio profession. More is coming. But how is it applicable to your needs? Do you need it? What might it cost? This article covers it all.

PROBABLY THE MOST significant event in the history of audio engineering was the marriage of electronics to music reproduction. The application of vacuum tubes to the manufacturing of records and the broadcasting of programs over the airwaves in the late 1920's gave the infant electronics industry tremendous momentum. The vast consumer market potential for radios, phonographs, and ultimately television, spurred the industry on and created a demand for better methods of producing and reproducing sound. Of necessity, the equipment used to do this became more and more sophisticated, especially within the recording studio and transmitter room. In parallel developments, both the audio and broadcasting segments of the industry moved forward in attempting to close the gap between real sound and artificially produced sound. With each technological advance in the science of music reproduction, the industry moved asymptotically closer to that elusive thing called ultimate fidelity. Once a high degree of fidelity had been achieved, the industry reached out in new directions and made music reproduction into an art form.

As all this was taking place, the type of equipment used to record and reproduce sound became more complex at an ever accelerating pace. By the 1960's, the highly perfected electronic equipment needed for accurate sound production in recording studios had become orders of magnitude more complex and more difficult to use than its ancestors.

Many additional skilled people were required to operate the newer generations of equipment. Entire staffs were needed to record a single performance, and to perform the work necessary to mix down the original material into a mass reproducible form. And somewhere in the never-ending attempt at perfection in sound reproduction, the time-honored techniques and machinery started to run into a man-machine interface problem. The proliferation of equipment and people, all of which had to work in perfect synchronization and harmony, reached, or nearly reached, the breaking point. The audio industry had built up a system that, by its very nature, relied too heavily on the man, and taxed his capabilities to the point where he became the weakest component in the system.



TeleSessions

You're invited to use a brand new communications medium to build on the ideas in this article with a group of people as involved in the subject as you. By means of a new "electronic meeting place" called db TeleSessions, you'll be able to dial into a group telephone conference with other db readers across the country. You can reserve your spot in the discussion now by turning to the inside back cover for details and information on how to participate.

Man was being called upon less as a creative entity within the system, and more as an automaton just to keep the system functioning.

During the years that electronic equipment in the audio/broadcasting field was being perfected for the highly specialized tasks that are unique to this industry, there were many parallel developments going on in other fields that involved electronics. Mass production techniques in automobile manufacturing became electrified, chemical processes were being controlled automatically by electronic systems, electronic guidance systems employing highly advanced feedback techniques were enabling us to shoot rockets to the moon, and electronic computers were being developed to calculate our pay checks, our electric bills, and even monitor our heartbeats when all this madness drove us into a hospital. Indeed, electronics was being applied to virtually every field of endeavor in the arts, the sciences, in industry, and in the home.

Perhaps at this point, we should examine some of these other developments that have tremendously benefited other industries, and ask, "Can any of these technological advances in electronics be of any benefit to audio engineering and specifically, can they make the man-machine interface problem less burdensome to the man and free him to be more creative?" I believe the answer to this question is yes. Man-machine interface problems are not unique to audio engineering. They exist in all phases of industry and manufacturing. They exist in airplanes, in submarines, and in the manned space program. The general method of attacking this class of problem is to automate the machine as much as possible without taking ultimate control away from man. Automation in this sense means taking the "dog work" away from the operator, thereby, giving him more freedom to operate the system to its fullest capacity. A side benefit of this kind of semi-automation is the elimination of subjective human errors that usually occur in the repetitive and lower level system functions. Now that we have come this far, it seems fair to state that the audio industry is ready for another marriage to the electronics industry. This time, the major concern will not be on better sound reproduction, but on better utilization of existing equipment and manpower. The benefits of such a marriage will not be from a purely technical standpoint, but rather from a business standpoint, because if some form of automation is feasible, then increased efficiency and throughput should be possible, and this will directly affect profits.

Joseph Marrone is a sales engineer with Digital Equipment Corporation.

When we think of automation, or more properly of semi-automation, there are several ways to proceed. Everyone dreams of the day when everything he must do can be accomplished by the push of a button. But in the context of our discussion, that represents an impractical form of utopia. Hence, it is necessary to define some goal to which we can address ourselves; some readily obtainable objective that can be accomplished with a minimum amount of effort, a very high probability of success, and no ill effects on the present operation of the system. One of the dangers with proceeding too fast in the area of automation is that one tends to bite off more than one can chew: leading a noted philosopher to utter the unforgettable phrase "Most vast projects are usually started with half-vast ideas." So for openers, it is important to define the minimum identifiable task consistent with the three guidelines stated above. Instead of trying to automate the entire operation all at once, with a 1 per cent probability of success, it makes much more sense to select a small, innocuous project that has a 90 per cent probability of success. In order of increasing complexity, here are some typical projects which lend themselves to automation.

Studio Control. Provide a better method for playing tape cartridges. Use of a conductive band on the tape would enable accurate timing of the upbeat, and provide a means of cutting microphones in and out at the proper time.

Tape Recorder Control. Provide a means for automatically starting several tape recorders that must be accurately synchronized. This will be of benefit for dubbing, punching in, mixing, etc.

Automatic Transmitter Switchboard. Provide a system that monitors transmitters A and B, and automatically switch one to full power if the other fails.

Generation of FCC Log. Provide a means to monitor all important transmitter parameters automatically, and print out the FCC log without operator intervention.

Improvement of the Mix-Down. Provide a means to "remember" the fader, echo send, pan pot, and other parameters associated with the mix-down process so that the operator doesn't have to commit everything to memory.

Network Control. Provide a system that stores a day's programming and automatically switches the outgoing audio (and video) continuities at the proper times and performs the functions of pre-roll, wipe, cut and dissolve.

In each case, the important concept is to place actions of a purely mechanical nature under automatic control, while actions involving judgment should remain under control of an operator. To automate a system requires us to have full knowledge of the normal as well as the abnormal sequences of operation of the system. Once defined, we can design some kind of black box to perform this sequence of operations. Analog techniques, digital techniques, or some combination of the two will permit us to design what we need. Analog techniques are familiar to those who have had experience in feedback control such as is commonly found in operational amplifiers, servomechanisms, etc. Digital techniques were first employed using relays, switches, and timers. Today, most digital systems are of solid-state design. The digital system possesses several characteristics that make it ideal for automation purposes.

Decision-making Ability. Digital circuits can make elementary decisions about a system based on the inputs, and perform some action that depends on the decision. The basic decision making element is referred to as a *gate*, and gates are combined to form logic circuits that make higher level decisions.

Memory. Digital circuits can be made to remember some past event or data. This means that the system can

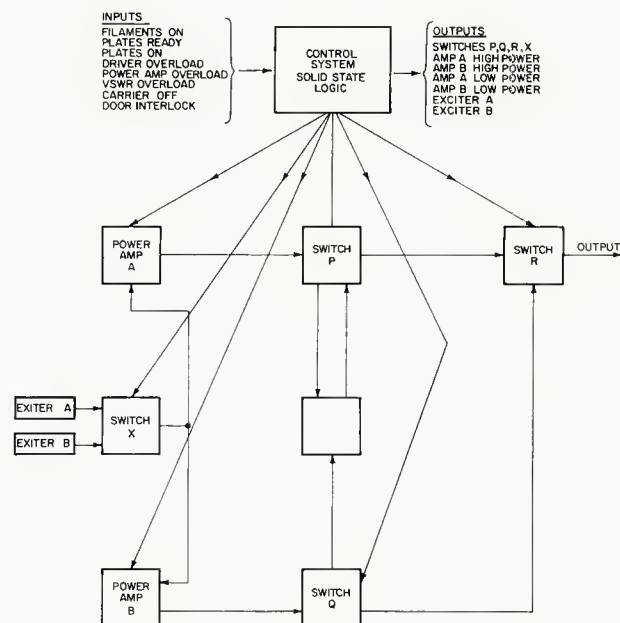


Figure 1. An automated transmitter switchover system.

look back and see a "snapshot" of some portion of past history.

Sequential Operation. Digital techniques make it easy to perform sequences of operations whereby the termination of one event causes the next event to start. Digital counters, shift registers, and one-shot multivibrators are all used for this purpose.

The proper combination of logic circuits, memory, and sequential circuits enable the designer to build digital systems that can perform a given set of tasks. The more flexible and changeable we make the system requirements, the more complex the logic becomes. As systems increase in complexity, it soon becomes obvious that a digital system must have some means of easy modification so it can be made to do any number of different jobs. This is precisely what led to the development of the small general-purpose computer. A computer is nothing more than a collection of general-purpose logic circuits and memory combined in such a way that one can program the job to be done by putting certain commands in memory. During execution of the program, these commands are interpreted by the logic circuits, resulting in a sequence of events similar to that achieved with ordinary digital systems. The big difference is one of flexibility, and the decision to use a straight digital circuit or a computer involves a trade-off on the cost of implementation *versus* the flexibility of the resulting system.

Let's examine some of the relative costs of specially designed digital systems (often referred to as hard-wired logic systems) and small computers. While each application must be evaluated on its own merit, there is a general rule of thumb that hard-wired systems fit into the under \$5,000 category. The availability of small computers in the \$5,000 price range make it impractical, for the most part, to build special purpose digital systems that cost more than this, when for the same price, or slightly more, one can purchase a small computer with much greater flexibility. On the other hand, a programmable computer does require a programming effort that costs money, and this must be taken into account when estimating the total cost of a job. The important thing to remember is that programming changes do not require us to cut wires, add parts, or change schematics; all of which must be done when trying to modify a hard-wired logic system. So there is a trade-off between the ease of

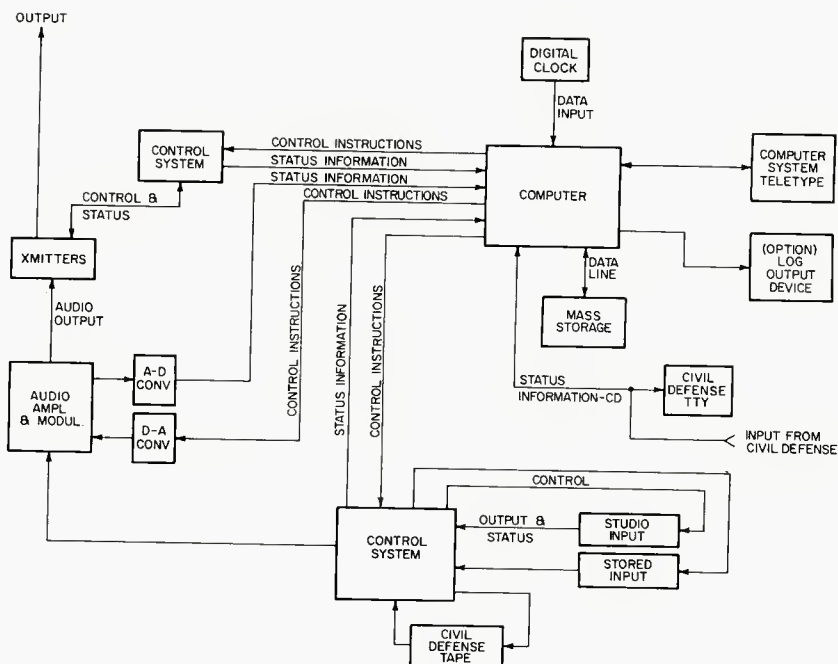


Figure 2. A small computer could control a complete radio station.

modification and cost of modification. The price of a small computer system is affected by several factors. Some of these are as follows:

The size of the memory required to do the job.

The requirement for additional bulk memory (often called mass storage). This is available in several forms such as magnetic tape, magnetic disks, and magnetic drums.

The need for special circuitry to interface the computer signals to the audio equipment being monitored or controlled. Much interface hardware, such as analog-to-digital converters, digital-to-analog converters, and on/off devices such as relays are available off-the-shelf and make most interfacing jobs fairly easy.

The need for special operators' consoles to operate the computer system and give it commands.

Putting all these factors together, we can talk about a minimum practical price of a small computer with memory and some interface equipment of about \$7500. Systems in the range of \$7500 to \$20,000 might be typical for a majority of applications in audio engineering, while for certain specialized tasks price could range as high as \$50,000 to \$100,000. These prices are all subject to radical change as electronic technology progresses, but the relative magnitudes will stay fairly constant.

Let's examine two typical systems to see how both hard-wired logic and small computers can be applied to specific tasks. FIGURE 1 shows a typical transmitter system in which amplifiers A and B normally operate at half power. If either A or B should fail, the switches P, Q, and R would eliminate the bad amplifier from the system and leave the good one on the air. Then the good amplifier would be boosted to full power. This can all be accomplished automatically by monitoring the status of each transmitter. Such parameters as plates on, filaments on, plates ready, driver overload, etc. would be inputs to the logic system, which monitors them on a continuous basis. The detection of a failure in any of these conditions would be interpreted by the control logic, and the appropriate action taken, such as shutting down the bad transmitter and bringing the other up to full power. The same type of monitoring can be used on the two exciters, and provision made to switch the back-up exciter onto the system should the primary exciter fail. The entire control system to do this type of job can be built using off-the-shelf plug-in modules. Everything including

the logic gates, power supplies, mounting hardware, a.c. and d.c. input and output adaptors are available today at reasonable prices. Very little special design, if any, is necessary to build such a system. Some people refer to this equipment as an "electronic erector set." Once the logic circuit is designed, it can be built from standard printed-circuit cards, which plug into sockets that have been wired for the particular job. This is a very modular approach and allows relatively easy field modification of the equipment. Also, time to repair will be low because relatively few types of modules will have to be kept in spare parts inventory.

The inherent flexibility of a small computer in forms of control operation make it a natural choice for many forms of audio automation. Returning to our example of a radio station, while a hardware logic controller would be useful for such a simple operation as monitoring the performance of transmitters and adjusting them to satisfy particular conditions, how about the more general problem of station operations? Obviously, the problems involved for such a function—essentially, augmenting the work of the station engineer—are considerably more sophisticated than those for the more straightforward one of transmission control. Here we require a system that is able to make rather sophisticated judgments, that is reasonably flexible about how it is going to achieve its ends, and that is "smart enough" to be able to call for help when it runs into a problem beyond its capacities.

Such a system will have to monitor and correct transmitter power output, check for frequency drift and correct for any deviations beyond the established limits, monitor and be prepared to accept any emergency inputs such as Civil Defense information, check component performance to determine whether any malfunctions have occurred that would affect output performance (e.g. an overmodulated signal), and keep a record of station performance.

Such a system would be built around a small computer. And here we can see how a small computer can act in a partnership with simpler logic systems, for the subsystems used for regulating the transmitters would be virtually identical to the system described above. The only differences would be that there would be monitoring outputs from the control unit to the computer, and control outputs from the computer to the system. Other aspects of the system would not be quite the same as the control

circuit for the transmitters; a diagram of such a system is shown in FIGURE 2.

In addition to the control system for the transmitters, a similar control system would be devised to control the program source (*i.e.*, whether information is to come from stored tapes, from live studio operations, or from the Civil Defense announcer). In the control system, other parameters, such as relative audio levels, degree of source modulation, and the like, could also be monitored and corrected if necessary.

For the audio amplifier, its performance could be monitored by the computer through an analog-to-digital interface. Corrections, if required, would be supplied by the computer through control signals transmitted via a digital-to-analog converter.

Program schedules could be stored in the computer's mass storage device, which could be either magnetic disk or tape; standby alternatives could be kept in reserve for program emergencies. Also, data could be stored on this mass storage device for later analysis—either directly, or as a printout. By correlating actual events such as a time standard or internal clock, this stored information could form the basis for a comprehensive station log.

And finally, the line from the Civil Defense network could be monitored for possible use. If the correct information was received by the computer through a communication line, it would activate the special unit that would broadcast the alert and instructions.

And because of the sophistication of the programming, the minicomputer could signal the engineer through some input-output device, most probably the unit's Teletype.

The computer is ideally suited to remember all those operating procedures that one must now commit to memory. Again, there is a great amount of standard equipment available today to do these jobs, and the customized interfacing between computer and system can be kept to a minimum. And although it might be possible to construct a similar device out of logic gates and memory, thus making it a hard-wired logic system, hard-wired systems of this magnitude tend to be horrendously expensive. Also, such systems are difficult to justify unless a convenient means has been provided for checking them out if they malfunction. Another important justification for using a computer in this application is the ease of checkout by means of special programs called "diagnostics." These programs can help pin-point problems in the system, and most important of all, could be incorporated into the regular computer routine to do periodic checks on the status of the equipment. This feature is fairly easy to do with a programmable computer, and extremely difficult to achieve in hard-wired logic. In addition, changes of the system's performance characteristics are much easier to implement by developing and reading in new programs as opposed to having to make physical hardware changes. To be sure, we have only touched the surface of studio-engineering automation. Obviously, even the simplest of projects requires a great deal of thought to determine the best way of doing the job. The intention here has been simply to indicate typical systems-level approaches that can be employed. Solid state logic, minicomputers, and interfaces are new tools available to audio engineers and technicians. They are here today, offering off-the-shelf solutions to many problems. So perhaps in the near future you will discover that your pet project has a natural—and inexpensive—solution through automation techniques. ■

ACKNOWLEDGEMENTS

Eric Small, chief engineer—WOR-FM

Irv Joel, chief engineer—A & R Recording Studio

A Stainless Steel Stradivarius

it isn't, but that's the closest we can come to describing the new Infonics Professional Duplicating Systems 200. They produce 10 to 15,000 Hz $\pm$ 3 db on cassettes... an octave jump in band width. Building-block modularity gives them flexibility so great no ad can describe it.

Systems 200 have endless loop, reel-to-reel, and cassette master modules, reel and cassette slaves, even fully automatic slaves for unattended operation. Ferrite heads for 55,000-hour life. 1.5 MHz. bias. Produce 4 to 100 C-40's in 1.9 minutes. Automatic rewind and cueing. Defective cassette stop and indication.

Plug-in electronics with both digital and linear IC's. 55 db crosstalk. Heavy-duty professional decks. 100% vibration test for reliability. The only non-professional feature is Systems 200's price... you'll be amazed! And they're in production right now. Phone or write for your 10 to 15,000 Hz. demo cassette and our spec sheet — all 12 pages of it.

Infonics, Inc., 1723 Cloverfield Boulevard, Santa Monica, California 90404, phone 213 / 828-6471, Cable Address: Infonics

infonics
systems 200®



Reel master,
Cassette and Auto-Slave...
three of the seven Systems 200 modules.

Circle 28 on Reader Service Card

Automatic Tape Transport Control

Several automatic tape search units are now available. One such unit, available from Ampex, is described. The applications of this sort of device may be endless.

IT IS 2:30 in the morning and you've been in session since 3:00 the previous afternoon. The producer looks into your glassy eyes and says sincerely, "OK . . . let me hear the beginning of take 20, the bridge of take 7, and the ending of take 17." Only 2500 feet of tape separates you from a good night's sleep.

In prehistoric days, (i.e., before 1970) finding the requisite selections would have involved searching for each slate, finding it, and then waiting for the appropriate section. You *can* skip ahead to find the section, but are you *sure* you're still in the right take?

Within the last three years, the major professional tape recorder manufacturers have introduced various electronic devices to simplify and speed up this time consuming task. This article will discuss the method of operation and applications of these devices.


Basically, the new devices are digital counters which are coupled to the tape by electro-mechanical sensors. They give an indication of how much tape has passed the heads from the feed to the take-up reel. The least complex of these units counts the number of tape turntable revolutions and gives an index number proportional to the number of revolutions. Other units are capable of automatically shuttling the tape transport back and forth to reach a number which can be preset from the front panel.

At least one of these units, the Ampex Tape Search and Control unit, is capable of measuring the elapsed time of the tape in minutes and seconds and searching for any location on the tape to the nearest second.

Using such a device in the session alluded to enables you to find takes 20, 7, and 17 just by dialing in the starting time of the take and pressing a button. The engineer is now free to fill in his take sheet, move a microphone, readjust levels, or what have you, while the tape transport automatically cues itself.

HOW IT WORKS

The heart of the tape search and control unit is the counter/memory which determines the current tape location, (see FIGURE 1). This circuit is comprised of several integrated circuits which accept input pulses and count up or down depending upon the direction of tape travel. The total number of pulses (up counts minus the down counts) is stored and sent to the display and comparison circuitry. It should be noted that one reason these search units have come out so recently is that the circuitry involved in just this counting/storage function would previously have required a rack cabinet full of equipment.



TeleSessions

You're invited to use a brand new communications medium to build on the ideas in this article with a group of people as involved in the subject as you. By means of a new "electronic meeting place" called **db TeleSessions**, you'll be able to dial into a group telephone conference with other **db** readers across the country. You can reserve your spot in the discussion now by turning to the inside back cover for details and information on how to participate.

The authors were responsible for a digital delay line article that appeared in May. Steve Katz is chief engineer of Sound Exchange Studios in New York City. Richard Factor and Mr. Katz are both v.p.'s of Eventide Clockworks, Inc.

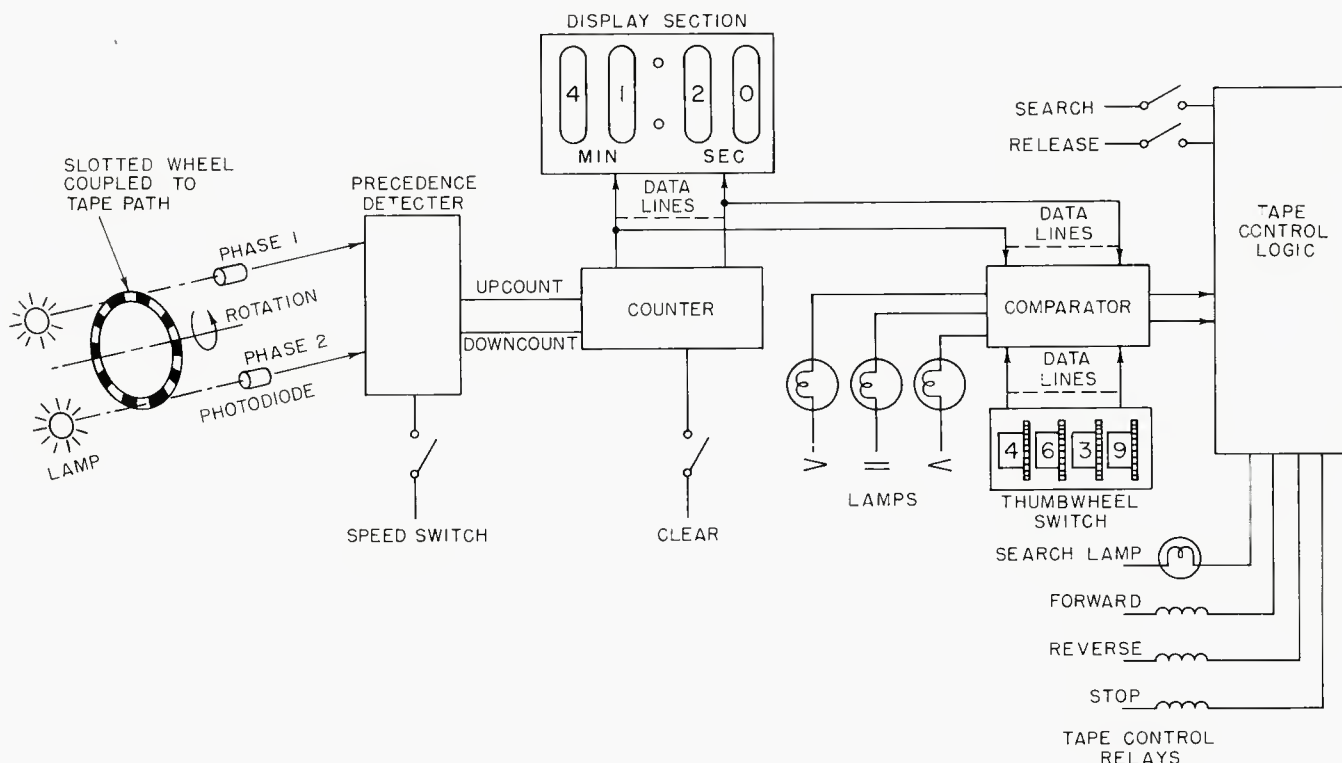


Figure 1. A block diagram of the Ampex tape search and control unit.

The counter receives up/down pulses from a tachometer located on the tape deck. To derive an index number, rotation of the tape turntables is sensed. To determine actual elapsed time, the tachometer must be in the tape path, and its rotation must have one-to-one correspondence with the amount of tape passing over it. The advantage of this approach, in addition to giving precise time intervals is that the tape may be transferred from machine to machine, or have leader added to the beginning or end without changing the timing. A turntable rotation sensor is sensitive to tape slippage caused by air packing in the reel, and to the amount of tape on the reel.

The tachometer produces two signals which differ in phase so that direction may be determined. By sensing which of the phases comes first, the other can be locked out and the appropriate up count or down count derived. The frequency of the dual phase signal is proportional to the tape speed. This signal can be generated magnetically or photo-electrically.

HOW THIS IS USED

The stored position information is conducted to the display unit. This information is in binary-coded decimal form. Since the Ampex Search and Control Unit uses Nixie type readouts, the bcd information must be converted into decimal form. A single integrated circuit, replacing many transistors, performs the conversion for each digit. Thus, the display gives a continuous indication of the current tape time.

The bcd information going to the display also goes to a circuit known as a comparator. The other information going to the comparator comes from the front panel thumbwheel switch, with which the engineer can select the desired location. The comparator takes both sets of data and determines which is numerically larger, or if they are both equal. Determining which is larger is all that is necessary to decide which direction of tape travel is necessary to obtain equality.

SEARCH SEQUENCE

You have just finished take 5; the display is reading 20

minutes and 33 seconds. You want to go back to the beginning of take 2, at 4 minutes and 3 seconds. You set the thumbwheel switches at 0403 and depress the search button. The comparator determines that the tape must travel in a reverse direction to reach the desired time, and the reverse relay closes. The tape speeds up and zips back to 4:03. Suddenly the comparator sees that the times are equal, and then the forward relay closes, and the tape slows down, stops, and begins going in the forward direction. As it passes the "equals point," it again slows down and reverses. This process repeats several times with progressively decreasing tape travel until finally the tape reverses direction during the one second interval during which the display time and the thumbwheel switch-set time are equal. When this occurs, both the forward and reverse relays are released, and the stop relay is activated for a short period.

Thus, the tape is shuttled back and forth in decreasing lengths of travel and then finally stopped at the precise time selected. One consequence that may not be immediately apparent from the above description is that the tape search unit also acts as a motion-sensing unit. Since it stops the tape at the instant of reversal, the brakes are activated and the machine comes to a halt *only when the tape is not moving*. Thus, all starting, shuttling, and stopping is accomplished with the torque motors only, and brakes are never used. This means that operation of the unit is not dependent on a built-in motion-sensing unit, and that the control unit may be employed not only with the MM1000 and MM1100 16-track machines, but also with Ampex and other make 1/4-inch tape recorders. It also means that tape handling is substantially more gentle than when a mere human runs the machine.

CONTROLS

In addition to the display and thumbwheel switch referred to above, there are several additional controls on the unit. The search button initiates the searching operation; the release button terminates the search before completion if for some reason the engineer changes his mind. The clear button is used to reset the counter/memory



Figure 2. The search unit.

either at turn on or the beginning of a tape. This, in effect, can be used to set a reference point as described later. The 15/30 or 7 1/2/15 in/sec switch is set to the current speed of the tape transport, to assure that the timing information will be correct.

Several indicator lamps other than the display are provided, two to indicate in which direction the tape must travel to reach equality, one to indicate when the times are equal, and one to indicate when an actual search operation is occurring.

Since the tape search and control unit can be used with virtually any professional tape recorder, a panoply of applications suggest themselves. In addition to uses in recording studios, there are uses in broadcasting, cutting studios, film work, and others. We will take these in order and give some suggestions and applications in each field. After that, we will discuss some of the future possibilities in automatic tape control, using both search units and other devices and techniques.

RECORDING STUDIO APPLICATIONS

In a typical recording session, the search unit would be used for timing and control functions. After breaking out a new reel the tape would be advanced about one minute in and a grease pencil or splicing tape mark would be made. This mark will henceforth and for all time be the permanent reference for the tape. All time markings written down for permanent record will be elapsed time from this mark. This mark is centered over the play head and the "CLEAR" button on the tape search/control unit is depressed, setting the time to 00:00.

As the session progresses, each take beginning is

Figure 3. On an Ampex MM-1000 the arrow points to the tachometer.



marked on the box or take sheet. If it is necessary to go back to any take, this time record gives the thumbwheel switch setting necessary to go to the top. Likewise the time within the take can be noted for each musical feature. Thus if a return to the first bridge is desired, it can be precisely returned to, with no danger that it's actually the second bridge. If it is desired to work with one take, the zero can be reset to its beginning, and a little mental arithmetic (adding the starting time to the time into the take) can be obviated.

BROADCASTING APPLICATIONS

The broadcast industry is more accustomed to automation than the recording industry. Frequently entire stations' air operations are automated, from music selection to logging. And yet, the day-to-day operation of stations in production, news gathering, air checking, etc., is almost inevitably manual.

A common procedure in station news rooms is to provide a tape to record telephone conversations, both for broadcast and legal records. Typically a day's worth of conversations will be recorded, and the news editor will later abstract one section of one or more conversations. Marking the tape time of each cell or event will allow instant location. Trying to wind back to the appropriate flag more often than not just leaves a problem for the janitor (and in a small station, the engineer is the janitor). Locating spots in an air check is another possible application, when the dj starts a segment, he can put a tape up and record the show from then on, logging the starting time of the tape on the box. If it becomes necessary to locate a spot for a sponsor (or a violation for the FCC), it is just necessary to put the tape back on and run it to the proper time. For operations with little cohesiveness in programming (top 40 rock, for instance), where almost every segment is under three minutes, and most are only seconds, it saves a lot of time to find things right away.

Having bi-directional search capability with thumbwheel switch control allows one to select a given time even if the tape has not already been at that location, facilitating this task.

OTHER APPLICATIONS

The timing function alone is of inestimable value in an operation such as a cutting room, in which tape timing is necessary. Say an album is sent over with no timing information. The engineer must know how long the cuts are to determine the level and pitch at which the disc must be cut. Unfortunately, timing normally takes just as long as cutting, raising the cost of the operation intolerably. With the tape search unit in the timing mode, determining the length of the tape takes no longer than running it fast forward to the end and reading the display number. Also, if the tape is unleaded, one knows when to spiral by timing information alone.

So much for the current applications of the tape search unit. The list is not exhaustive, but it does show some of the things that you can apply it to in your field.

POSSIBILITIES IN AN AUGMENTED SEARCH SYSTEM

None of the devices to be suggested are offered for sale by any manufacturer, but they are all possible with modifications to the basic unit, and do not require any particular advance in the state of the art before becoming feasible.

A simple auxiliary circuit would enable one to store location information in a random access memory. It would be possible to, say, log the location of each selection directly in the search unit, simply by pressing a key

corresponding to the selection number and simultaneously depressing the "store" button. Depressing the number key and the "retrieve" button will automatically send the tape back to the top of that selection. This has applications in recording, broadcast automation, etc. . . . For tape interchangeability, a small magnetic card reader could store and transfer this time data from one search unit to another. The magnetic card would go in a little pocket on the tape reel or in the box.

Adding a keyboard and a slightly more complicated memory would enable one to partially automate the mix-down function. For instance, if it is desired to mute a track because of noise during some period, one would enter in the *time out* and *time in* for that track, along with the track number or some identifying code. This application is obviously not limited to muting tracks—anything that must be done during the tape playback can be programmed into the memory. The amount of data stored is not limited by the capacity of any code recorded on the tape, as, indeed, no code is recorded, thus saving the track for musical information. Also, there is no leakage problem between an encoded track and a recorded track.

One might think that a one-second resolution would be inadequate for this application. However, the tachometer on the tape deck actually puts out 48 pulses per second (at 15 in/sec), thus dividing the entire tape into approximately 20 millisecond increments. Any one of these may be selected for an event to occur.

One slight disadvantage of this system when compared with a tape-encoding scheme is the possibility of tape slippage. The tachometer is normally in perfect contact with the tape and no slippage occurs. However, in fast forward or rewind, a small error is possible, especially if there is paper leader in the tape. This error is rarely more than a second, which is irrelevant in normal opera-

tion, but critical in a mixdown application. If it is necessary to rewind to a precise spot, a small piece of aluminum foil can be placed at the precise beginning reference and this be either found photoelectrically or used as the start reference.

Sometimes it is desirable to synchronize two or more tape machines to allow additional tracks to be recorded. The normal procedure for doing this is to record both tapes with the SMPTE time code and have two time code readers compare the tapes and adjust one to the other. This works very nicely, but costs about ten thousand dollars. An alternative is to use two search units and a photoelectric strip as described above to start the tapes simultaneously. If the two tape machines have d.c. servo control, they can be locked by running both machines from one control track. A completely electronic positioning system not requiring a time code is under development.

Certain accessories to enhance tape search unit operation are possible. For instance, remote readout units can be employed to indicate to the performer and producer the elapsed time from the beginning of the tape. Such a remote unit can work in several modes—it can be slaved to the main unit and read the same time, or it can be reset independently and provide an elapsed time from the beginning of a take while the master unit will preserve the absolute time.

We have described some of the applications for automatic tape search and control equipment. Low cost, versatile equipment of this nature has recently been rendered possible by the decreased cost of complex integrated circuits. As this trend continues, we anticipate the introduction of digital equipment with built in calculation or computation functions, as well as other more elaborate functions yet unanticipated. ■

Auditronics, Inc. presents a sneak preview "Son of 36 Grand"

Coming to your neighborhood studio soon (Rated R)

Here is poetry in sight and sound for recording studios that want 16 track recording capability, with real life performance and economy in one console. All from a manufacturer with over five years experience producing big budget recording systems and consoles.

Auditronics "Son of 36 Grand" is a second generation Professional Audio Control Console, five years in the making, that puts 16 track capability within the economic range of every studio.

A recording console that provides 16 in, 8/16 channel output, full quadraphonic capability, and complete monitoring flexibility for both recording and mixdown, normally would set you back about \$36,000. But the action packed "Son of 36 Grand" gives you all this at less than half the price!

To get your pass for a backstage peek at specs on this rising new star, just drop a line to Auditronics, P.O. Box 12637, Memphis, Tennessee 38112... the people who brought you "36 Grand" and many other stupendous extravaganzas.

See the Son of 36 Grand
at the Fall A E S
Convention



auditronics, inc.
MEMPHIS TENNESSEE

Circle 44 on Reader Service Card

www.americanradiohistory.com

Automating the Audio Control Function, part 3

Ongoing applications of digitally programmed switches (dps) - a subject particularly of value to the audio pro that is beginning to become involved with some aspects of automation.

LAST INSTALLMENT we began to apply the dps to switching and control of audio signals, and explored a number of configurations. Since we left off on switching matrices, this would be a natural point of departure into the next series of applications.

It turns out that the factors* that make the dps switching structure a natural one for switching bus and matrix applications also lend it well to related applications—as digitally programmable attenuators and amplifiers.

FIGURE 1(A) is a sketch of the basic scheme in which the dps can be used as a programmable attenuator. Switches S1-S"N" are the digitally-controlled switching elements, here shown as ideal switches. Each switch controls an input current which will be in proportion to E_{in} and its respective input resistance. For any combination of S1-S"N" on conditions the net gain will be $\frac{R_f}{R_{eq}}$, where R_f is the feedback resistor and R_{eq} is the equivalent parallel resistance of the switching network. In effect this stage is a special case of a switching summing amplifier, where instead of a number of different audio lines being switched and mixed, we have a single audio line being switched through parallel paths, with different weights for each switch combination, thus changing the net gain.

The configuration is a flexible one, as any desired gain range and gain per step may be selected by choosing the appropriate resistance ratios and number of steps. FIGURE 1(B) illustrates how this would be accomplished using a number of dps switching elements, 1-"N." The total range of gain change will be:

$$\Delta A_v \text{ total} = \Delta A_v \text{ per dps} \times N$$

where N = number of switches,

$$\Delta A_v = \text{gain change per switch and } \Delta A_v \text{ total} = \text{total gain change}$$


Thus, for instance, a gain change of 60 dB would require 6 switches of 10 dB steps or 10 switches of 6 dB steps—depending on how fine you want your steps. The beauty of this system is that you can readily manipulate it to suit differing requirements. An example is FIGURE 2.

It is quite interesting to note what you can do with a programmable attenuator such as this. When fed a digital word such as might be generated during an automated mixdown process, a digital attenuator can directly perform the attenuation function without the intermediate hardware steps of digital to analog conversion and voltage controlled amplification. An interesting and useful side benefit

of this approach would be a direct readout of attenuation in dB via I.e.d. indicators driven from the storage register driving the digital attenuator. A block diagram of this system is shown in FIGURE 3.

Dps elements may be used within an amplifying feedback loop as well as at the input as described in FIGURE 1(B). FIGURE 4 illustrates how this is done in another gain ranging circuit. In effect all we have done is reconnect the input of the dps bank to the amplifier output, and feed our input signal to the summing junction via a single fixed resistor. The effective feedback path is varied by the circuit of FIGURE 2. The end effect is quite different however, as in this case gain is raised as the dps's open, the direct opposite of FIGURE 2. This then is a programmable gain amplifier.

Figure 1. (A) is a programmable attenuator. (B) is the dps programmable attenuator.

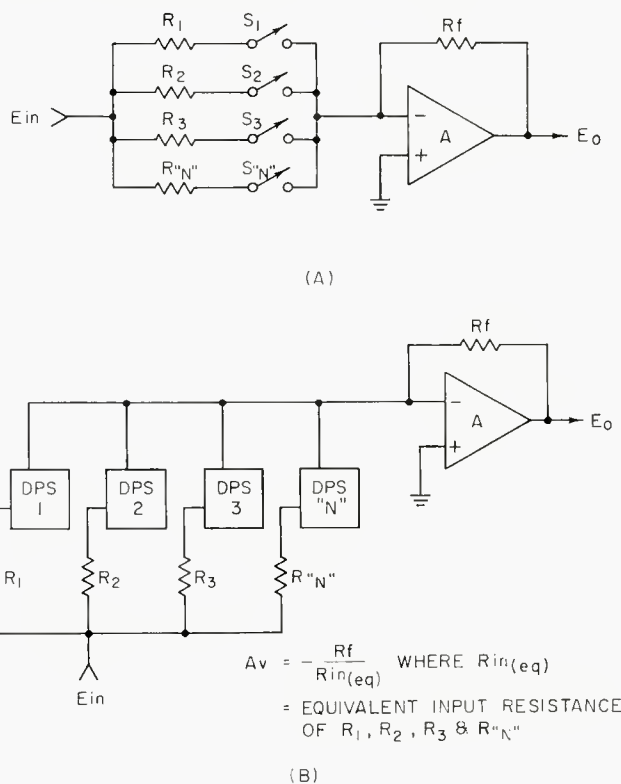

*see appendix of "Automating" Part 2

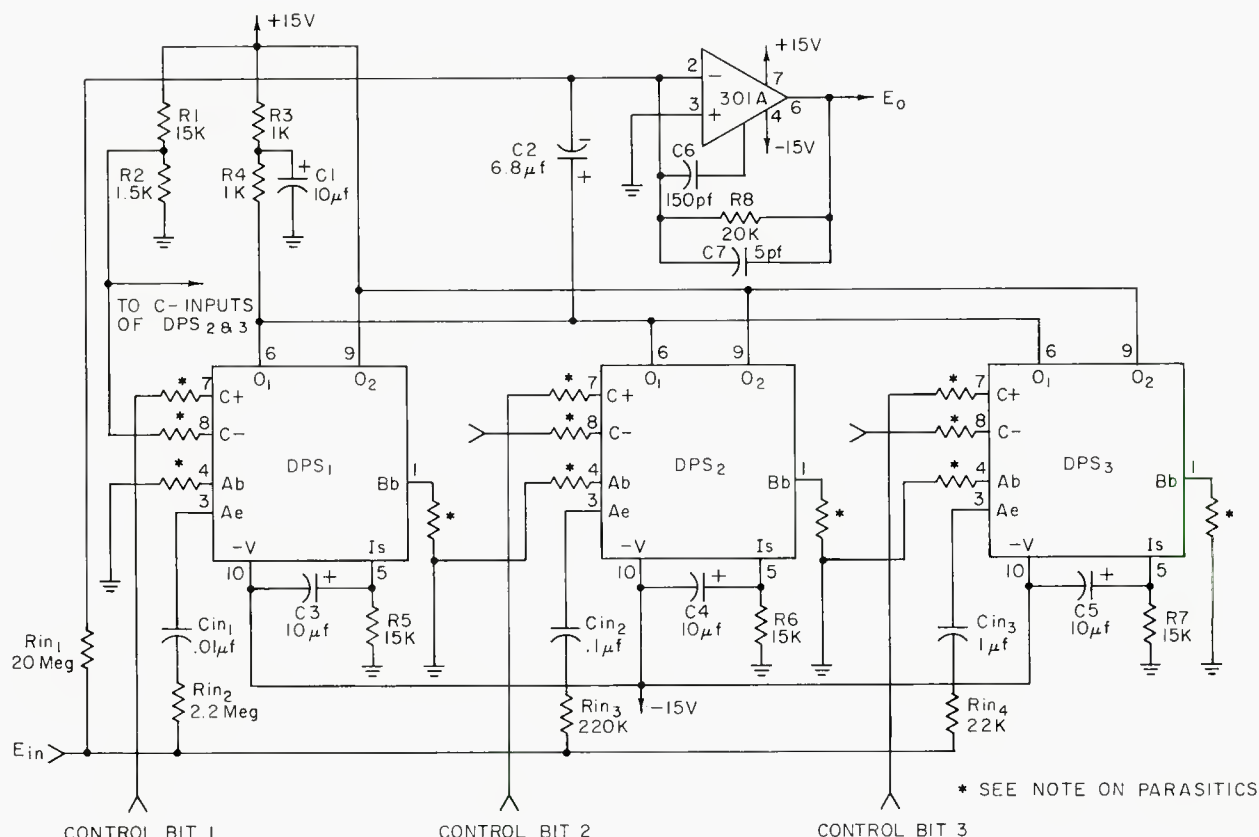


Figure 2. A programmable attenuator. A practical example of the attenuation technique we've been discussing is shown in this figure. Here three dps switching elements are set up for a total gain change range of 60 dB, ranging from 0 dB insertion gain (all switches on) down to -60 dB gain (all switches off). Signal handling capability is +20 dBm at both input and output, distortion less than 0.05 per cent, and with a low-noise op amp for A1, s/n can be in excess of 90 dB at max output. The gain state of the attenuator is under control of the three digital lines (1 per switch) with control logic as in Table I.

Gain is set by the ratio of the combination of R_{in} resistors to R_f (in this case RB). With all three dps elements off, gain is $\frac{R8}{R_{in1}}$ or $\frac{20K}{20M}$ which is $\frac{1}{1000}$ or

$$\frac{R8}{R_{in1}} \text{ or } \frac{20K}{20M} \text{ which is } \frac{1}{1000} \text{ or}$$

-60 dB. Switching on DPS1, changes this to -40 dB, with DPS1 +DPS2 it becomes -20 dB, and with all three dps elements on gain is 0 dB.

Several features of the circuit are worthy of note for those who might want to duplicate or modify it to suit special needs. One of them is the decoupling from the +15-volt supply line, provided by R3-R4, the split

d.c. load return resistors. The decoupling is absolutely necessary unless the supply used has virtually zero impedance at signal frequencies, otherwise the off signal at each switch (which appears at O2) will develop a signal across this impedance and feed it into the op-amp summing junction. This will ruin the otherwise excellent on-off isolation of the switches. It might be well to remember that we're talking here of a switch isolation capability of 100 dB—you just can't take liberties and realize this kind of performance!

Another point is a side effect brought about by the busing of dps outputs. Since a dps output is in actuality the output of an amplifier stage, (this is true regardless of the state of the switch) it follows that it does generate noise components. This is a point to be considered when adding units together in bus fashion, as the total system noise increases each time an additional dps is added in parallel. Noise from a dps is caused primarily by the reference current generator which is fed by I_s . Therefore for low-noise applications, bypassing the I_s terminal (C3, C4, C5) to -V is recommended to minimize this current noise, as well as operating at minimum possible I_s . By using this technique in the circuit of Figure 2 a noise level of -80 dBm was achieved.

A good application for this technique is as a "distortionless" agc system, shown in FIGURE 4. Here a number of dps elements are arranged to switch the negative feedback applied around amplifier A1. The number of switches would correspond to the agc range desired and gain change per step (as in FIGURE 2). Gain change points are determined by a number of level comparators which sense the relation between the input level and a series of reference voltages. The input signal is level detected by an appropriate detector (peak, rms or whatever form of control response is desired) and fed to the comparator bank. As the input rises, it will progressively

Table 1. Control states of Figure 2 attenuation characteristics.

	Control Bits		
Gain	1	2	3
-60dB	0	0	0
-40dB	1	0	0
-20dB	1	1	0
0dB	1	1	1

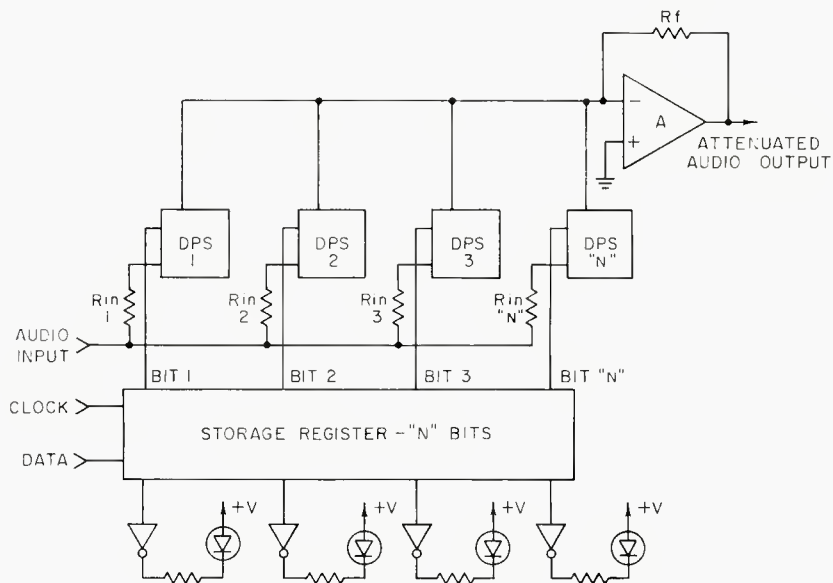


Figure 3. A digital attenuator with an led readout.

become greater than reference voltages E_1 - E_n as it passes each level, the comparator outputs change state, activating the dps's and reducing the gain. So, although the input may be constantly changing, the output will stay constant (as long as the input stays within the switching dynamic range of the system). A useful auxiliary feature would be a sequential l.e.d. gain-reduction readout driven from the control logic as shown.

An interesting variation on the level sensing gain ranging amplifier is a level sensitive *gating* circuit used to key program material on or off above a predetermined threshold. A block diagram of this is shown in FIGURE 5(A). The system is similar to FIGURE 4, except for the fact that it uses a single gate function and a variable gain preamplifier preceding the level detector. FIGURE 5(B) is a working circuit of such a system, with a detailed description of the individual elements.

Obviously, the uses you can find for a gating system like this are numerous. Careful control settings will allow undesired background noise to be keyed off while allowing desired material to pass. Or you can slave a number of gates to a common master which can switch the others on or off by appropriate choice of control logic. A single device may be used for either expansion or compression by driving the auxiliary input with a higher (expansion) or lower (compression) level signal. You can key in a special effects signal on the auxiliary input to get some spectacular effects as the unit switches into the auxiliary channel and keys on the "doctored" signal.

Generally the circuits we have been discussing in this installment have centered around digitally-controlled amplifying circuits. We have seen how they may be implemented in a number of ways. A natural extension of this


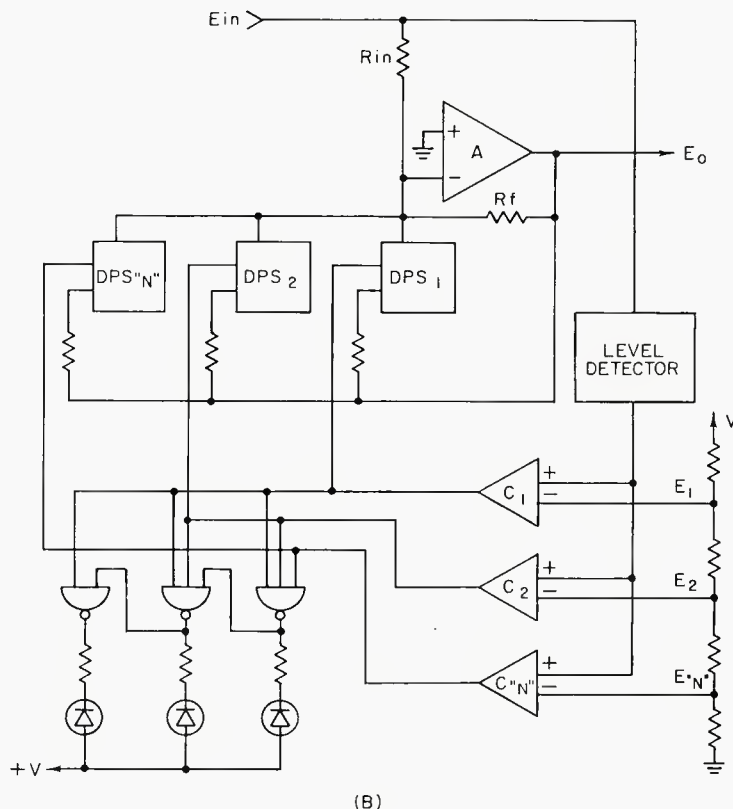


Figure 4. At (A) a programmable gain amplifier using dps elements in the feedback loop. At (B) is a distortionless agc system with led gain reduction readout.

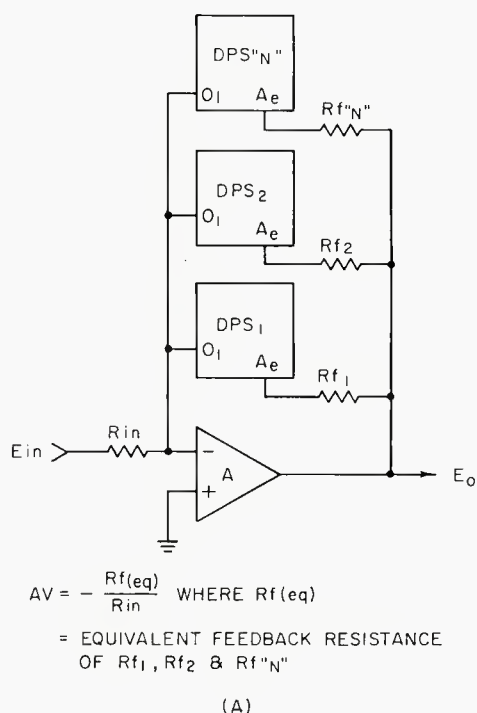

convention

You'll find the Olive Series 2500 multi-track recording console in the AES Convention at the Waldorf Astoria September 12-15. But you won't find any convention in the Olive Series 2500 Console. In creating the Series 2500 we threw out the ordinary. By rejecting conventional routes, Olive engineers made possible a console in the popular price range loaded with custom features. For instance, the 2500 is ready for automation when you buy it; attach the Olive Automated Remix Programmer and it remembers every single operation of your multi-track mixdown.

We believe the Olive Series 2500 is the finest console in its price range.

There's only one better at any price and we make that too — the Series 2000.

Drop in at the Waldorf and talk with the people who designed and built the 2500 and the 2000. Take a look at the Olive line of modular components like the equalizer and the compressor/limiter, all aimed at complementing the imaginative producer.

Olive. The unconventional at the convention.



Olive Electro Dynamics Inc.
2670 Paulus
Montréal 386, Québec
Canada
(514) 332-0331
Cable Olivet, Montréal

Westlake Audio Inc.
6311 Wilshire Blvd.
Los Angeles, California
90048
(213) 655-0303

Studio-Technique
4 avenue Claude-Vellefaux
Paris (10e) France
206-15-60/208-40-99

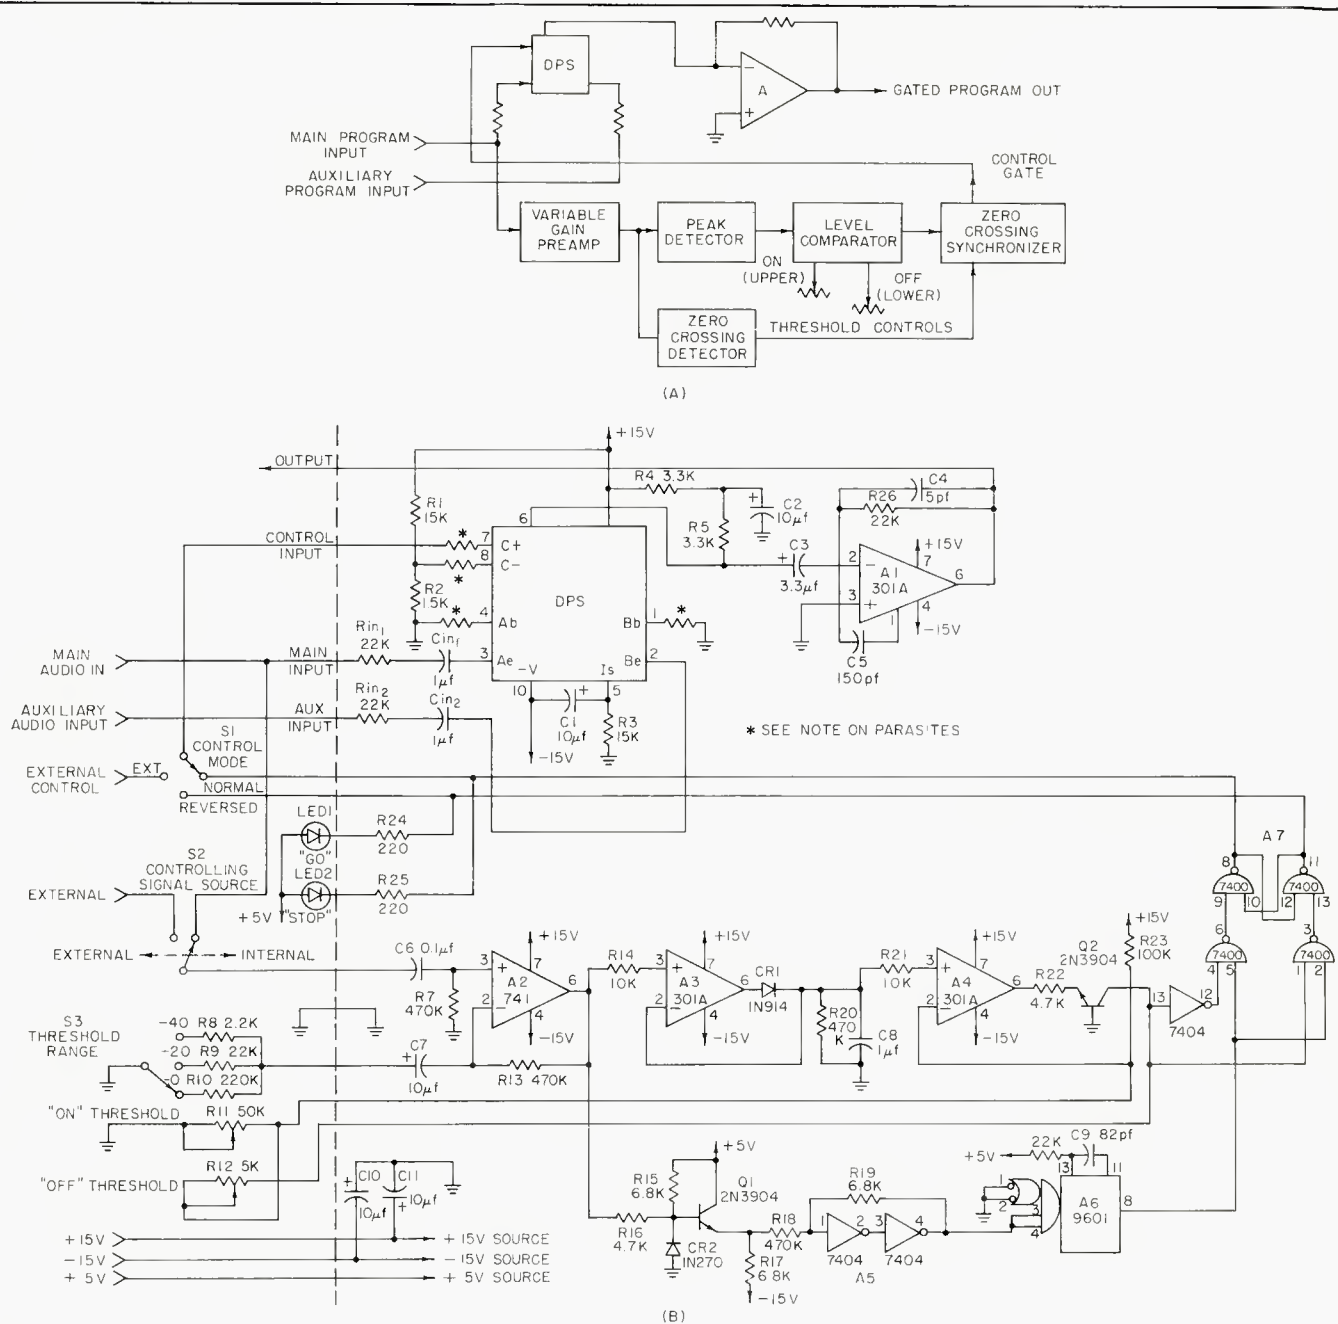


Figure 5. A level-controlled synchronous audio gating system. The level-controlled audio gate system shown in (A) and (B) is a good example of automated signal processing in a couple of senses. Basically, this current is a on-off switch using a dps. However the key to its versatility is in how it accomplishes the switching. This it does in quite a sophisticated manner.

Regarding (B), the circuit can be segregated in two main sections. The upper half, consisting of the dps and A1, comprises a switched input op-amp. The entire lower portion of the circuit is used for control signal processing in such a manner that the on-off switching points are not only under precise control, but they may also be remotely programmed.

Look at the circuit, the first function under our control is the controlling signal source selection (S2). This determines whether the switching control signal is to be derived from the signal itself (internal), or from another source (external).

Once inside the circuit, this signal is amplified by A2, where gain is determined by the switch selected feedback resistors R8, R9 and R10. Note that the gain

is set by a contact closure to ground—a natural configuration for programmability.

The output of A2 drives two paths, A3 and its circuitry and Q1 and the circuit following. A3 is an operational peak detector which reads signal peaks from A2 and stores a corresponding d.c. level on C8. The level across C8 is then fed to A4, which compares the audio sample to a d.c. reference voltage developed by R23 and R11. When the signal becomes larger than the reference, A4's output swings minus, driving Q2 on and switching R12 in parallel with R11. A new reference level is now established, set by R23 and R12, much lower than the first. When the audio signal drops to this new level A4 flips positive once again, resetting the circuit to its original state. The positive and negative comparison levels just described are the "on" and "off" points of this threshold switch. They are independently variable, and may be set with up of 20 dB of separation between switch points.

The logic compatible signal from Q2 is fed thru a zero axis synchronizing circuit to a control flip flop, A7. Zero crossing pulses are derived by A1 and A5-A6

is the switched two-input amplifier scheme, which allows a number of new possibilities.

As we have discussed above on applications of the level controlled gate, the two inputs of a single dps may be used to remotely switch a pair of signals. These signals may be unrelated, but the uses which first come to mind are the in-out transfer of a normal signal and a processed one, such as eq, reverb or delayed, matrixed or non-matrixed etc. Others may be for 2 unrelated inputs such as remote selection of 2 test frequencies, 2 different program lines; Telco or NET, etc.

The list of uses for a general purpose versatile switching device such as this could go on and on. Among the uses would be programmable filters, multiplexers, choppers, fsk Modems, function generators with programmability, fm stereo modulator or demodulator, frequency scanner and so on. It will be interesting to see to what degree the dps technology is exploited in solving the audio challenges of today and tomorrow.

Future installments of this series will explore other variations of audio automation and programming technology. ■

to ensure that switching occurs at a point of zero potential to minimize switching transients. Both states of the control flip flop are fed out to an external switch which selects whether the signal is to be normally off and thresholded on or vice versa.

Now, with the basics of the circuit in mind, it may be appreciated how the circuit can be used to automate control of audio signals. Signal threshold point switching is variable over a total variation of greater than 50 dB using the variable gain A2 pre amp to move the threshold levels of A4 with respect to the audio signal being switched. Further, the individual on and off switching points are independently variable. All of these functions may also be remotely programmed if desired.

Both control mode and control source selections are remotely programmable. Although simple selection switches are shown, these functions can be automated also by using a dps for S2 and a digital multiplexer for S1. An auxiliary input provides access to the normally off channel. A signal applied to this input will be keyed on during the off periods of the main input.

Component designations and values are provided for those who wish to duplicate the unit. A circuit board and component kit will be available in the near future.

Specification for Figure 5B

Attack Time: 300 μ sec worst case, measured with 0 dB tone burst with 0 dBm threshold. Significantly improved with lower thresholds.

Release Time: Approximately 100 msec per dB of difference between on and off threshold settings.

Insertion Loss: In on state of either channel insertion loss is nominally 0 dB. Off state attenuation $\geq$ 80 dB.

Frequency response: ± 1.0 dB, 20 Hz-20KHz.

Distortion: Less than 0.1% THD at any signal level within rating.

Output level: 22 volts p-p into load of 2k or greater.

Input Level: +20 dBm max, Z in 22K.

Signal to noise: 90 dB or greater below maximum output.


Control logic: A ttl "1" level at control input connects main input to output. A "0" connects auxiliary input to output. Switching time for either transition $\leq$ 100 ns.

Control Outputs: 2 supplied; a "1" level ttl signal when control signal input is above threshold plus the complement of this signal. Current drive for led indicators also supplied.

PARASITIC SUPPRESSION

As a practical matter, it is worthy to note the reason behind the otherwise inexplicable resistors which we note on the valued circuit schematics. We refer here to the low value resistances in the base leads of the dps chips. They are parasitic suppression resistances, necessary due to the extremely high bandwidth of the 1496/1596 transistors. These speedy devices can oscillate at VHF frequencies and you may never even see a trace of it on the output waveform! The indication that this is happening is the appearance of mysterious d.c. conditions; an output appearing when it shouldn't, d.c. levels wandering, and so forth. You can usually confirm the presence of an oscillation by probing the suspected point with a d.c. probe (or even your finger) while watching the output. If the device is oscillating, this will stop it, and the output will behave. A junction susceptible to this phenomenon can be tamed down to normal behavior by the addition of the "base stopper" resistors which serve as Q spoilers. Its a good idea to include these resistances in any circuit using these chips to insure stability. There are four required, one for each base lead, and they should be placed as close as is physically possible to the respective leads (C+, C-, A_b, and B_b). Yes, in case you are wondering, it is just like a similar problem with old beam power tubes!

Pentagon The professional's choice... high speed in-cassette and open reel duplicators

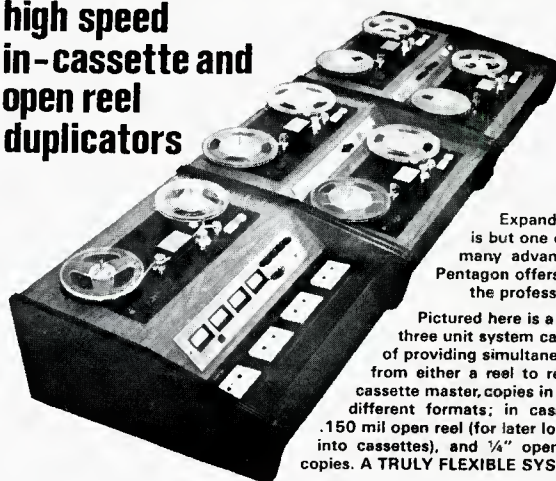

Expansibility is but one of the many advantages Pentagon offers you, the professional.

Pictured here is a basic three unit system capable of providing simultaneously from either a reel to reel or cassette master, copies in three different formats; in cassette, .150 mil open reel (for later loading into cassettes), and 1/4" open reel copies. A TRULY FLEXIBLE SYSTEM.


All Pentagon duplicators come with the following professional features . . .

- | | |
|--|---|
| ☐ ACCUTRACK METERING | ☐ TRACK SELECTION SWITCH |
| ☐ MODULAR DESIGN | ☐ PLUG-IN CIRCUIT BOARDS |
| ☐ BIAS READOUT | ☐ TEST SWITCH |
| ☐ SYNCHRONOUS CAPSTAN MOTORS | ☐ EXPANDABILITY |
| ☐ CASSETTE HIGH TORQUE START-UP | ☐ SERVICEABILITY |

See why Pentagon should be your first choice when it comes to high speed duplicating equipment. WRITE

**Pentagon
Industries, Inc.**

4751 NORTH OLCOTT AVE.
CHICAGO, ILLINOIS 60656

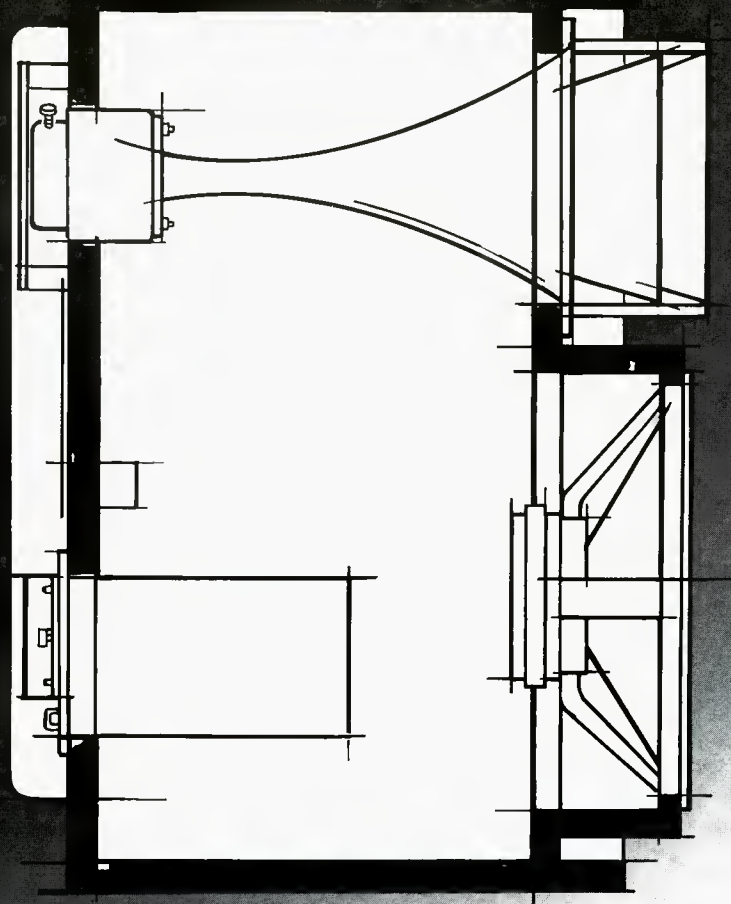

- Maximum acoustical output:* 112 db SPL @ 4 ft., equalized for flat response (pink noise), 40 to 15,000 Hz, in a free field.
- Dispersion:* 40° vertical x 90° horizontal.
- Bi-amplifier:* Altec Model 771 B. Input sensitivity: .5 VRMS-60 Kohm unbalanced input for full output. .1 VRMS-600 ohm balanced input for full output.
- Crossover:* 500 Hz, 12 db/octave.
- Noise (both sections):* 80 db below rated output.
- LF section:* 60 watts, continuous sine wave power, 0.3% THD.
- HF section:* 30 watts, continuous sine wave power, 0.3% THD.
- Dimensions:* 26.5" wide, 31" high, 23.5" deep.
- Weight:* 112 lbs.
- Finish:* Grey epoxy with black grille fabric.



The New Altec 9846 Bi-amplified Studio Monitor Speaker System

If stereo disk cutters go down to 30 Hz, shouldn't the monitors?

Yes. Because the music goes down that far.

You should hear everything when you're laying down tracks or you might not really know what you've got. Why wait till you play a test cut to find out what's at the low end? You don't have to with our new monitors.

What have we done differently to get that low end? First of all we're using sealed boxes. No more ports or bass reflex cabinets. We've gone to a very high-compliance speaker with a big magnet structure. It's well damped so that it responds accurately to signals down to 30 Hz. There's very little distortion. You can't get this with ported boxes.

Above 500 Hz things are different too. There's far more smoothness than in previous designs. Notice the proximity of the woofer and the HF horn. They're within inches of each other. This creates a smooth transition from one source to the other as you go up the spectrum.

Have you ever wondered why good monitor systems are two-way systems? It's because they guarantee transient accuracy. They don't have the inevitable problem of source displacement that occurs in systems with separate tweeters. And they don't burn out, as tweeters in most 3-way systems are prone to do, with the super highs present in much of today's music. Few drivers are capable of such a wide frequency range. Because so few speaker builders use the kind of phasing plug which makes this possible.

To make the system work, power has to be delivered. Biamping is the only solution. So we built a biamp right into the enclosure. It provides more than enough power to make the components produce more than enough sound. Depending on the music, the 90 watts of available power may be equivalent to three or four times that amount when compared to single amplifier systems.

This is truly a new recording tool.

Write for further information on the 9846 Monitor Speaker system. Altec, Professional Studio Products, 1515 South Manchester Avenue, Anaheim, California 92803.

PROFESSIONAL STUDIO PRODUCTS

ALTEC[®]

A Wide Dynamic Range Noise-Reduction System

Noise in tape recording is examined and a system for reduction that is now in use is described.

TAPE RECORDING has been one of the major sources of noise in professional studio systems. The almost universal application of multitrack techniques has accentuated the problem. The widely-used Dolby system gives just enough noise reduction to offset the 12 dB noise buildup inherent in sixteen-track recording. The continuing demand for improvement in quality delivered to the consumer makes further evolution in noise-reduction systems mandatory.

Several forms of noise reduction have been developed which selectively restrict the frequency response of the playback system alone. Signal components 40 or even 50 dB below program level form a vital part of perceived sounds. These are buried in the background noise and cannot be separated from it without extremely elaborate systems hence program quality is degraded. We have therefore restricted our interest specifically to those systems capable of complementary coding and decoding over a wide dynamic range.

A number of possible techniques exist for signal coding before recording and decoding on playback. The most practical appears to be the form which uses the signal itself to carry the requisite information for decoding. Such systems are equivalent to compression before recording and expansion on playback. Many of these have been used extensively. The Dolby A system is a four band compressor-expander. Several recording companies have used 1:2 compression factor companders for tape masters. Oppenheim and Stockham at MIT's Lincoln Laboratory devised an ingenious linear decibel compressor-expander using logarithmic amplifiers. Burwen has described a 3:1 compression factor system using peak signal detection capable of 110 dB range between peak signal and background noise. And of course, long distance telephone circuits have been equipped with companders for more than 30 years.

The quality and usefulness of a noise-reduction system for professional studio applications can be judged on dynamic range coverage, accuracy of dynamic tracking, especially on rapid rise transients, and ability to handle the imperfections inherent in the tape recording process gracefully.

It was our objective in this work to develop a system capable of recording the entire useful auditory dynamic range with excellent transient tracking. It must operate with existing recorders and be producible for a practical price.

DESIGN EVOLUTION

A linear decibel compressor-expander may be accomplished in the manner shown in FIGURE 1. Voltage controlled amplifiers control the input and output gain. Input and output level sensors control gain with an appropriate control polarity to produce compression in section A and expansion in Section B. Such a system might seem practical as a noise-reduction system as it can multiply the recorder dynamic range by the compression factor. A 60 dB recorder with a 2:1 factor system could yield a 120 dB signal-to-noise ratio. Unfortunately, the instantaneous background noise level varies with the signal envelope. The human ear can tune out a steady hiss to the point where the listener is only subliminally conscious of it. A varying noise envelope has a much higher auditory annoyance factor. Consequently this system is quite unsatisfactory for critical applications although its performance looks outstanding on paper.

TAPE NOISE

It is important to understand the behavior of the noise sources in tape recording. We are all familiar with the sound of the background noise in the absence of signal. It typically has the spectral distribution shown by the lower curve in FIGURE 2. When a signal is recorded the noise increases. The other curves show the resulting spectral distribution when a 180 Hz tone is recorded at various levels. Note that the noise in the entire spectrum is increased with increasing signal. The increase is greater near the tone frequency. The broadband noise increase is due to the increased number of magnetized domains passing by the playback gap. The increase near the tone is due to inhomogeneity in magnetic particle distribution in the tape coating and to surface asperities which lift the tape away from the gap as they pass through. Both these mechanisms cause an amplitude modulation of the signal by random functions which of course results in noise sidebands. The upper curve shows the background noise accompanying a +10 dB record level corresponding to the recording level on program peaks. The entire high frequency noise spectrum has risen. Note that the instantaneous signal-to-noise ratio of tape recording is nearly constant above -10 dB recording level. This causes an apparent increase in the high-frequency content of tape recorded signals.

With most audio signals, masking effects cover up noise effects within several octaves of the frequency band containing the dominant energy, but background hiss which is 50 dB under a strong low frequency signal can be plainly heard.

David E. Blackmer is president of DBX Inc., of Harvard, Mass.

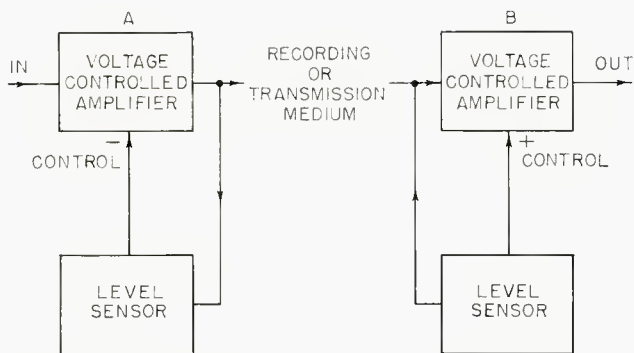


Figure 1. A linear compressor-expander system using voltage controlled amplifiers.

HIGH-FREQUENCY PRE-EMPHASIS

The high-frequency hiss changes accompanying signal envelope level changes may be rendered virtually inaudible with high-frequency pre-emphasis. If a 12 dB weighting is used from 400 Hz to 1600 Hz as shown in FIGURE 3, then the high-frequency hiss accompanying a strong low-frequency signal is reduced by nearly 12 dB. This will also cause a sharp increase in susceptibility to high-frequency self erasure which is already a problem without this pre-emphasis with many types of signals commonly recorded in contemporary music.

PRE-EMPHASIS OF LEVEL SENSOR SIGNAL

This problem may be resolved with the use of high-frequency pre-emphasis before the level sensing circuit. Any desired frequency shaping function may be applied to such a compressor-expander system level sensor as long as both record and play level sensor pre-emphasis curves are identical. We have chosen a 20 dB pre-emphasis starting at 1600 Hz which produces the sine-wave response curve shown in FIGURE 3. Note that this is the single frequency sine-wave response curve of the system. The complex wave weighting remains that shown in FIGURE 2 at all times.

TRANSIENT RESPONSE

A system such as this is only useful if it has adequate transient response tracking properties. Peak responsive level sensors seem at first glance ideal. Unfortunately, peaks 24 dB above vu meter reading are common, especially in mixdown. Tape recording levels are commonly run in a region where such peaks are flattened. This peak truncation is free from sudden slope changes, but serious tracking errors would occur between record and play level sensors. Equally obviously, average level sensors would be too slow. Furthermore, most tape recorders have considerable time delay dispersion (frequency dependant phase shift changes not giving constant time delay). Neither the peak nor the average value of a signal remains unchanged with non-constant time delay. The one function which is unchanged is the rms value of the signal. The rms value is the sum of the energy of all frequency components present without regard to their phase relationships. If there were a means to sum the squares of instantaneous signal levels, then the signal rms value could be determined. Fortunately recent advances in analog computation techniques have made this possible. The circuit shown in FIGURE 4 squares the signal by doubling the logarithm then taking the antilog. This squared signal is averaged and used to derive the control signal.

The final system design is shown in FIGURE 5. The input pre-emphasis network boosts the high-frequency con-

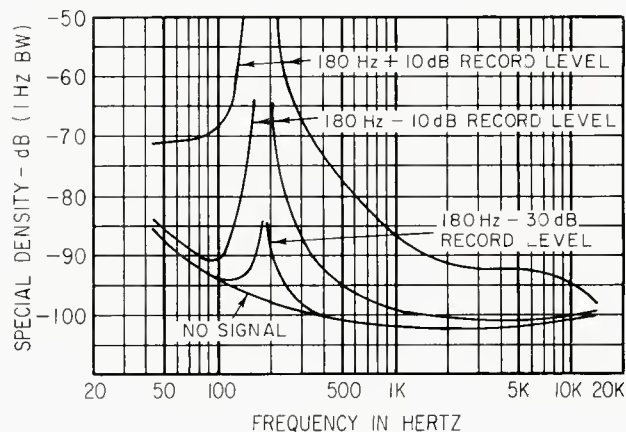


Figure 2. Noise in tape recording.

tent of the signal. The voltage-controlled amplifier controls signal gain in response to the output of the level sensor with a pre-emphasis network feeding the level sensors. The compression factor is set at 2:1. The unity gain point is set at +4 dBm at 1 kHz.


The decoder has an identical level sensing circuit which will therefore give the same control signal as that used in the input compressor. The control polarity to the vca is reverse. The over-all system gain remains unchanged as the two vca's give complementary gain changes. A de-emphasis network on the output restores frequency response.

SYSTEM PERFORMANCE

This noise-reduction system when used with a studio tape recorder has an equivalent "A" weighted background noise under -90 dBm without audible imperfections. A difference in apparent high-frequency response can be heard as the noise reduction system is alternately switched in and bypassed while recording and playing simultaneously with a tape recorder, but careful comparison of the original signal with both recorded signals shows that the noise-reduced signal sounds like the original and that the cause of this difference was the increase of tape hiss with record level as shown in FIGURE 2.

There are other barely audible imperfections due to asperity noise with some types of very clear signals but these noise components lie in the same frequency region as the dominant signal energy band hence we must look to improvements in tape surfaces for their reduction regardless of the noise-reduction system used. Incidentally,

Figure 3. High-frequency hiss changes accompanying signal envelope level changes may be rendered virtually inaudible with high-frequency pre-emphasis.

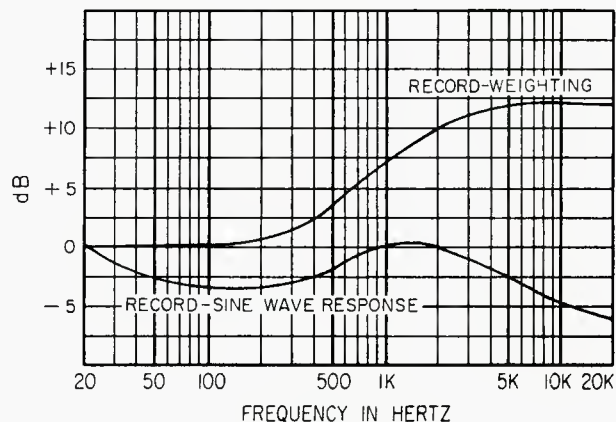

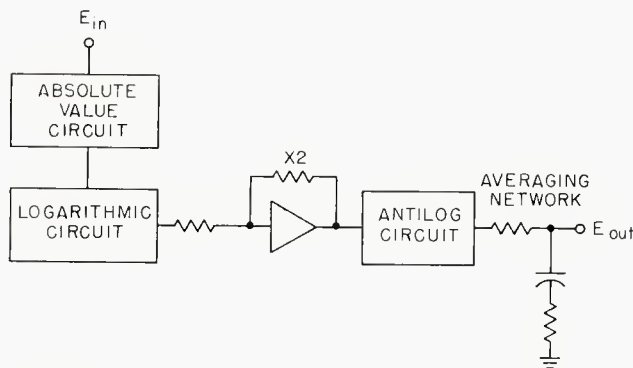


Figure 4. This circuit squares the signal by doubling the logarithm, then taking the antilog.

these components can be masked almost completely with a steady hiss. The required level of this "noise perfume" is about -65 dB. It is no coincidence that noise-reduction systems which claim no audible effect have this residual noise level present in the output.

The DBX noise-reduction system handles very well in studio use. No level matching is required for accurate transient response. The complete absence of audible background noise requires some rethinking of recording techniques. Gain riding is unnecessary in all original session recording. There is more latitude for post equalization so that most equalization can be left for the mixdown session. Limiting and compression are only used where re-


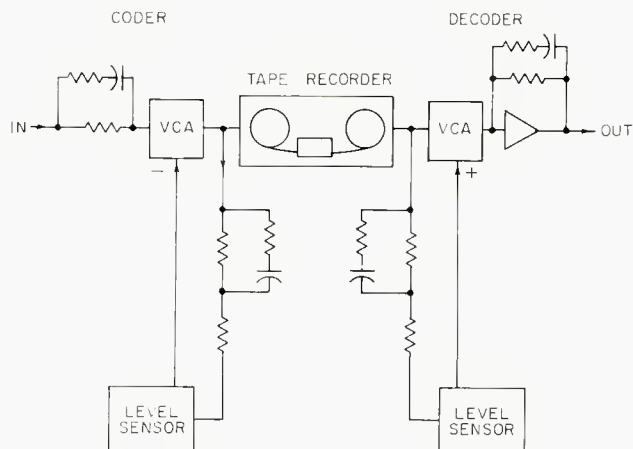


Figure 5. The final system design.

quired for effect. A number of generations of re-recording may be used without excessive noise buildup.

The signal quality improvement due to this system can give the studio master tape recording a better sound and dynamic range than the best disc recording, thereby significantly improving the quality of audio delivered to the growing number of critical listeners. Only when it is gone do you realize how pervasive background noise has been in recorded sound. ■

A little, free book that can lead you to a thousand adventures on a beautiful island in the West Indies.

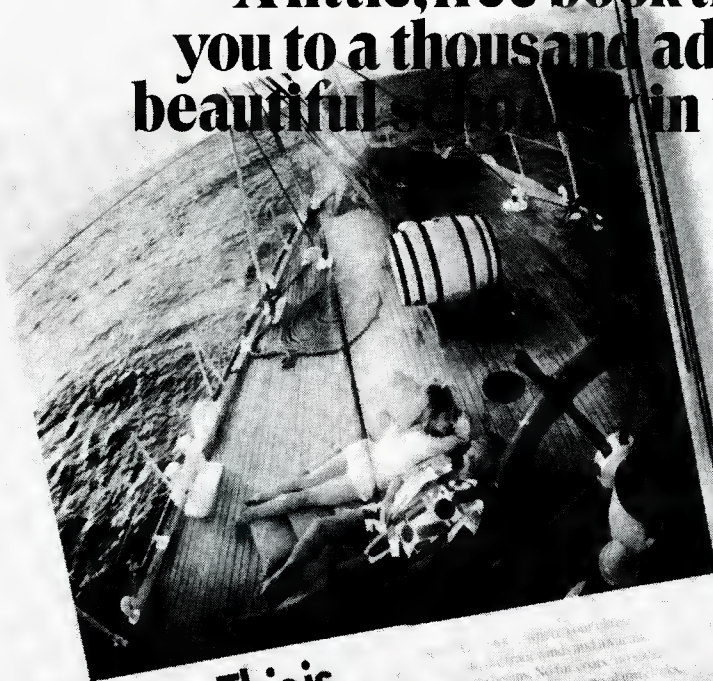

This is Windjammin'

We'll show you more of the West Indies than you'll ever see out of a hotel room window. You'll set foot on Dominica, Montserrat, Guadeloupe, English Antigua and French Martinique.

You'll skindive, swim, snorkel, prowl uninhabited beaches. You'll limbo, calypso and rock to a steel band. Take a night watch or fall asleep under a star spangled sky. 10 days from \$250. It could make the best-seller list!

Windjammer Cruises.

Cap'n Mike, Windjammer Cruises.
P.O. Box 120, Dept. 000,
Miami Beach, Florida 33139.

Send me the little, free book!

Name.....

Address.....

City.....State.....Zip.....



Entente Cordiale

A friendly understanding.

A phrase that perfectly describes the relationship between Revox tape recorders and Beyer microphones. One fine piece of equipment uniquely complementing another.

Wherever you go, you'll find these two thoroughgoing professionals working together. On location and in the most demanding studio situations.

Both Revox and Beyer are expressions of the same European dedication to meticulous craftsmanship and superior technology.

For example, take the new Revox A77 Mk III. It's the successor to the critically acclaimed Revox A77, the machine that moved Stereo Review to comment, "We have never seen a recorder that could match the performance of the Revox A77 in all respects, and very few that even come close."

Or take the new Beyer M500 microphone. You've never used anything quite like it. It combines the sharp attack of a condenser and the sturdy reliability of a moving coil with the unduplicatable warmth of a ribbon.

And Beyer makes a number of other microphones to satisfy virtually any broadcasting or recording requirement.

Together or separately, these sophisticated instruments provide the ideal solution to the problem of versatile, high quality, low cost recording.

Your nearest Revox-Beyer dealer will be pleased to demonstrate any of these fine products for you.

After that, you can arrive at your own friendly understanding.

For additional information and complete technical specifications, write: Revox Corporation, 155 Michael Drive, Syosset, New York 11791.

California: 3637 Cahuenga Blvd. West, Hollywood 90068. Canada: Tri-Tel Associates, Ltd., Montreal. London: Lamb House, Church Street, Chiswick, W4 2PB

Circle 47 on Reader Service Card




Circle 23 on Reader Service Card

ADDRESS _____
CITY _____ STATE _____ ZIP _____
CHICAGO • LOS ANGELES • TORONTO ☐ DIST. IN MILAN
HAMBURG • PARIS • LONDON • BEIRUT

dh Visits__

look who's going

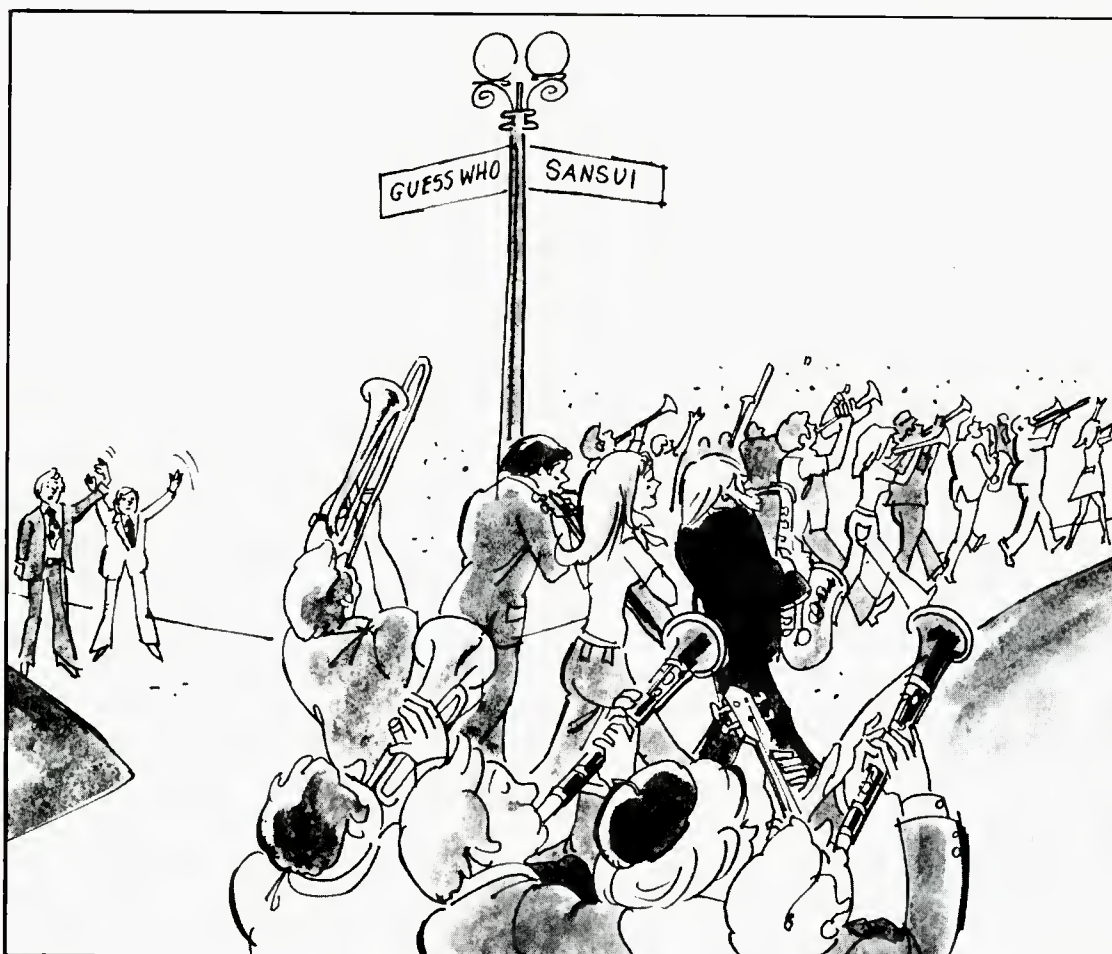

You may have heard it already—or you may not have—but more and more recording artists, more and more recording labels, and more and more engineers and producers are using Sansui's QS four-channel technique to encode their records in the four-channel mode. The list, growing from week to week, is quite impressive. But more important than the list itself is the fact that all these independent artists and companies have conducted extensive testing and actual use procedures before they made up their minds. What speaks for Sansui's QS System is not the pressure of a major software company nor exaggerated statements and promises; it's simply the performance.

Whether it is such an outstanding artist as Carole King or Joan Baez; or perhaps eminent musicians and producers like Enoch Light or Dick Schory add to the list such a beloved figure as B. B. King—they all are going Sansui's QS way because they think it is the best way. Some of these artists have actually produced with other matrix four-channel encoding methods, but have found that the most satisfactory results, in terms of the freedom of the producer and the artistic results, are in the one and only balanced and symmetrical system—that is, Sansui's QS method.


the QS way – and why

(Report on the Sansui QS Coding System)

There are now almost three hundred – yes, three hundred – Sansui-type matrixed four-channel record albums available all over the world, most of them encoded with Sansui QS encoders. In this country alone, almost 30 albums are already on the market. And we hate to hold anything back from you, but there are a number of artists who will, in the very near future, be on the market with their QS four-channel recordings. Also, major labels.

While we do not know the particular reasons each of these artists and producers selected Sansui's QS System, we know that it could be any or all of those enumerated here. These are the qualifications that make Sansui's QS matrix system uniquely efficient and effective and musically satisfying. In fact, we believe Sansui's QS System is the only matrix system that can claim that it has no known major drawbacks, that are not subject to refinement. These are the features of Sansui's QS system:


TOTAL, ACCURATE SOUND-SOURCE LOCALIZATION in every direction and at any point *inside* the sound field. No dropouts, cancellations or irritating shifts in position. The "overhead" effect, with a performer in the dead center,



is readily achieved. This means there are no problems about having to place performers in some positions and avoiding other areas. It means that the total acoustic perspective is the same as that for discrete tape.

TOTAL COMPATIBILITY. Sansui's QS Coding System is compatible with two-channel stereo playback of encoded recordings. With four-channel playback (ambience synthesis) of conventional two-channel recordings. With other matrix decoders. With all existing home hardware and with all existing

Location of Various Sound Components in Left and Right Channels



professional equipment. With present broadcast standards and equipment.

There are many important implications in this comprehensive situation. For

example, when QS-encoded material is played back in conventional two-channel stereo, it produces an entirely correct stereo perspective. The rear-channel information serves to produce a broadened and enhanced stereo perspective instead of jamming rear-channel information unnaturally into the wrong places to confuse directionality and obscure the stereo effect.

We believe that it is in the interest of the entire industry that the very best system be selected, regardless of politics, regardless of cross-currents and undercurrents, regardless of alliances and pride or even some dent in someone's reputation.

We have no other ax to grind than to play the fiddle that will make the best music for the industry. If you care to know more about Sansui's QS System, please contact our New York office for a demonstration and materials. It may interest you that the RIAJ (Record Industry Association of Japan) has adopted the Sansui system under the name of Regular Matrix to be the standard for recordings in Japan. An application for acceptance of our standards is now with the Recording Industry Association of America.

It's no wonder, then, that everybody who is anybody in the four-channel medium is going the QS way. Why not join the trend? The QS encoder is very simple to adjust, easy to use and reliable. Try it. Check out our claims with your own material, in your own way. Learn for yourself what the present members of the Sansui QS bandwagon have already discovered.

Labels Using Sansui QS Encoding

A&M • Audio Treasury/ABC • Black Jazz • Command • Impulse • Ode • Ovation • Project 3

Artists Encoded with Sansui QS

The Awakening • Count Basie • Doug Carn • Ray Charles Singers • Alice Coltrane • Henry Franklin • Free Design • Urbie Green
John Lee Hooker • Sammy Kaye • B. B. King • Carole King • Bonnie Koloc • Enoch Light • Tony Mottola • Doc Severinsen • Beverly Sills



For full details, contact your nearest Sansui office now.

SANSUI ELECTRONICS CORP.

Sansui Electronics Corp.

New York

32-17, 61st Street, Woodside, N.Y. 11377. Tel.: (212) 721-4408. Cable: SANSUIEC NEW YORK. Telex: 422633 SEC UI.

Sansui Electric Co., Ltd.

Los Angeles
Tokyo

333 West Alondra Blvd. Gardena, Calif. 90247. Tel.: (213) 532-7670.
14-1, 2-chome, Izumi Suginami-ku, Tokyo 168, Japan. Tel.: (03) 323-1111. Cable: SANSUIEC.

Sansui Audio Europe S.A.

Belgium

Diaceem Building Vestingstraat 53-55. 2000 Antwerp. Tel.: 315663-5. Cable: SANSUIEURO ANTWERP. Telex: ANTWERP 33538.

Vernitron Ltd.

Germany, W.
U.K.

6 Frankfurt am Main, Reuterweg 93. Tel.: 33538.
Thornhill Southampton SO9 5QF. Southampton 44811. Cable: VERNITRON SOTON. Telex: 47138.

Circle 51 on Reader Service Card

www.americanradiohistory.com

43rd AES Convention

THE EXHIBITS

Dates: *September 12-15*

Place: *New York's Waldorf-Astoria*

Exhibition Hours:

Tuesday—5 to 10 p.m.

Wednesday—11 a.m. to 10 p.m.

Thursday—11 a.m. to 5 p.m.

Friday—11 a.m. to 5 p.m.

Banquet: *Thursday, September 14th.*

Cocktails—7 p.m., Gold Room

Dinner—8 p.m., Starlight Roof

THE PAPERS

Tuesday

- A. 9:30 Quadrasonics. *John Woram*, Vanguard Recording Society, Inc.
- B. 2:00 Broadcast Engineering. *Eric Small*, WOR-FM.
- C. 2:00 Transducers. *Mahlon D. Burkhard*, Industrial Research Products, Inc.
- D. 7:30 A Forum on the State of the Art. *John Woram*.

Wednesday

- E. 9:30 Recorders. *Arthur E. Gruber*, AEG Associates
- F. 2:00 Signal Processing. *Albert E. Grundy*, Institute of Audio Research.
- G. 7:30 Tape Duplication Seminar, *Ray Dolby*, Dolby Laboratories, Inc.

Thursday


- H. 9:30 Disc Recording. *John J. Bubbers*, Stanton Magnetics, Inc.
- J. 9:30 Sound Reinforcement and Architectural Acoustics. *David L. Klepper*, KMK Associates.
- K. 2:00 Audio and Medicine. *Philip Kantrowitz*, Queensborough Community College.
- L. 2:00 Audio Instrumentation. *E. E. Gross*, General Radio Company.

Friday

- M. 9:30 Audio in Musical Education. *Max V. Mathews*, Bell Labs.
- N. 2:00 Electronic Musical Instruments. *Daniel W. Martin*, D. H. Baldwin Company

Technical Sessions B, J, L will be in the Astor Gallery. All others will be held in the Jade Room.

On following pages detailed maps of the exhibits being shown at the convention. Last minute changes after our press time may create some minor changes.

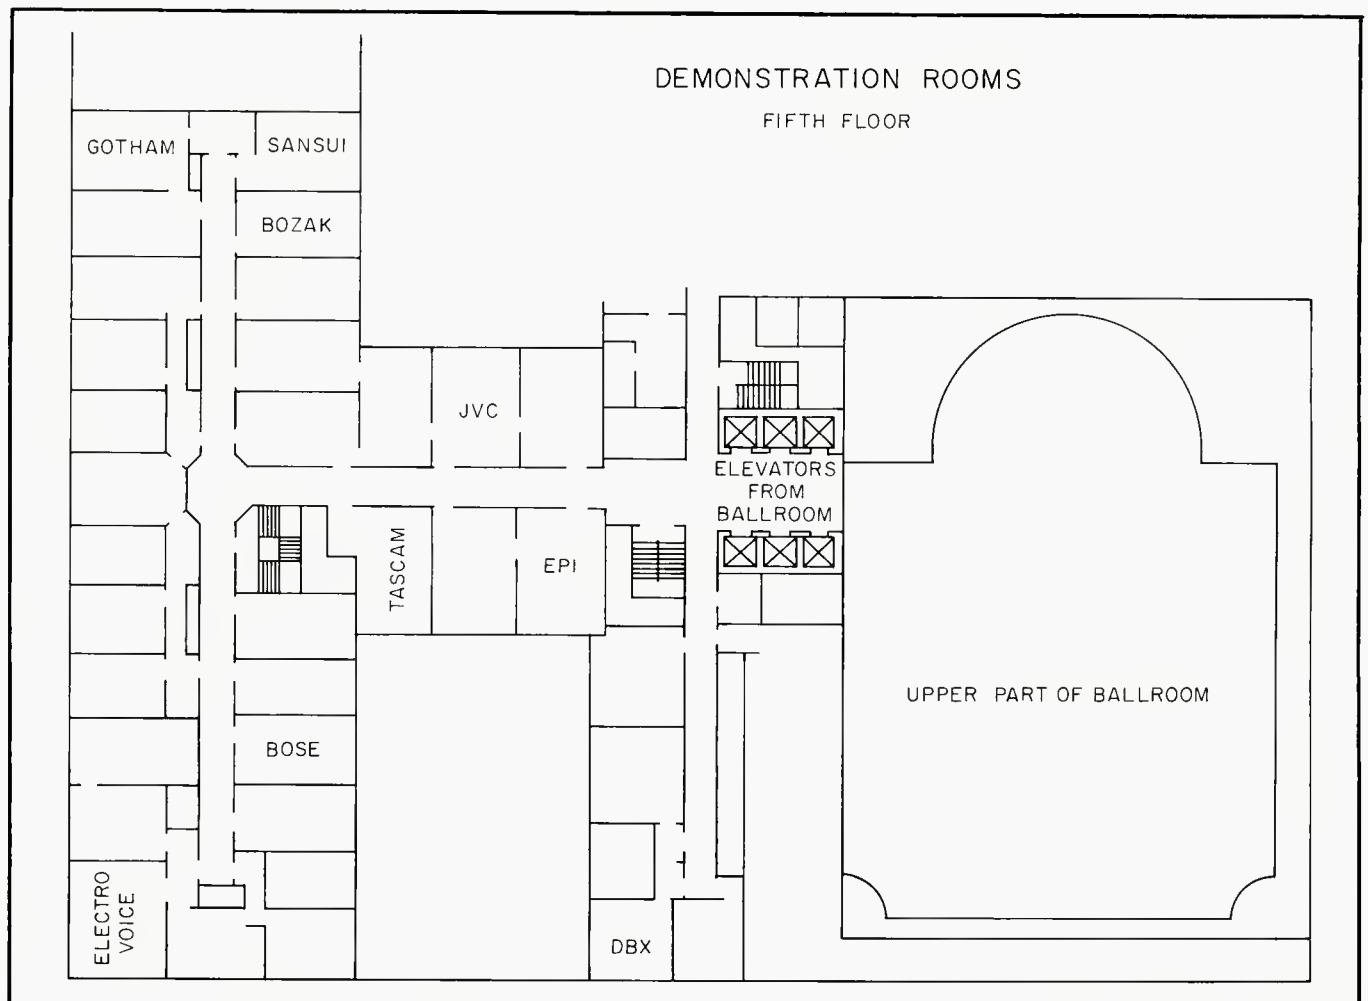

WALDORF-ASTORIA
43rd AUDIO ENGINEERING SOCIETY CONVENTION
SEPTEMBER 12-15, 1972
BALLROOM FLOOR (THIRD)

JADE ROOM
TECHNICAL SESSIONS

ASTOR GALLERY
TECHNICAL SESSIONS

CONFERENCE
ROOM

REGISTRATION

EXHIBITOR
SERVICE DESK

ELEVATORS
FROM LOBBY

FREIGHT

FREIGHT

PUBLICATIONS

NAGRA

AMPEX

AUDI-
TRONICS

ELPA

AKG

DOLBY

ELECTRO

SOUND

MARTIN

CROWN

CROWN

ALLISON

RECORTEC

SYSTRON

DONNER

AUDIO DEVICES

NASH-
VILLE

BASF

URL

SENN-
HEISER

STAGE

HARVEY

STAN-
TON

SHURE

B&K

DBX

MAXELL

SPECTRA-

SONICS

REVOX

NEVE

XEDIT

IT1

PENT-
AGON

UREI

CCA

AUDIO DESIGNS

CUSTOM
FIDELITY

GATELY

MCA

AUDIO-
TECHNIQUES

OLIVE

PRATT

FAIR-
CHILD

SCULLY

WESTLAKE

AUDIO DESIGNS

ELEVATORS
TO
DEMO ROOMS

EVENTIDE

CAPPS

ARP

RCA

IN-
FONICS

TAPE
MAKER

WATERS



As a service to our readers we are pleased to offer books from prominent technical publishers. All prices listed are the publishers' net. Shipping charges are included.

To order use the coupon at the bottom of the page. Indicate quantity on the special instructions line

If more than one copy of a title is wanted. Full payment must accompany your order. We cannot ship c.o.d. Checks or money orders should be made payable to Sagamore Publishing Company, Inc. Because of the time required to process orders, allow several weeks for the receipt of books.

BOOKCASE

20. The Audio Cyclopaedia (2nd ed.). Dr. Howard M. Tremaine. New and updated, here is the complete audio reference library in a single volume. It provides the most comprehensive information on every aspect of the audio art. This new edition includes the latest audio developments including the most recent solid-state systems and integrated circuits. It covers all subjects in the fields of acoustics, recording, and reproduction with more than 3400 related topics. Each topic can be instantly located by a unique index and reference system. More than 1600 illustrations and schematics help make complicated topics masterpieces of clarity. 1760 pages; 6½ x 9¾ hardbound. **\$29.95**

1. The Technique of the Sound Studio. Alec Nisbett. This is a handbook on radio and recording techniques, but the principles described are equally applicable to film and television sound. 264 pages; 60 diagrams; glossary; indexed; 5½ x 8½; clothbound. **\$14.50**

7. Acoustical Tests and Measurements. Don Davis. Provides solid understanding of the entire subject of acoustical measurements; based on actual field test work, using commercial equipment. 192 pages; 5½ x 8½; hardbound. **\$6.95**

8. Handbook of Electronic Tables & Formulas, (3rd edition). A one-stop source for all charts, tables, formulas, laws, symbols, and standards used in electronics. Includes an 8-page, full-color fold-out chart showing latest FCC allocations for the entire frequency spectrum. 232 pages; 5½ x 8½; hardbound. **\$5.50**

24. Basic Electronic Instrument Handbook. Edited by Clyde F. Coombs, Jr. Hewlett-Packard Co. A basic reference background for all instruments. Offers saving in time and effort by having complete information in one volume on how to get the most benefit from available devices, how to buy the best instrument for specific needs. Reduces chances of costly errors. Ideal reference book, it is an excellent source for the beginner, technician, the non-electrical engineering man, or general non-engineering scientific and technical personnel. 800 pages. Hardbound. **\$19.50**

25. Operational Amplifiers-Design and Applications. Burr-Brown Research Corp. A comprehensive new work devoted entirely to every aspect of selection, use, and design of op amps—from basic theory to specific applications. Circuit design techniques including i.c. op amps. Applications cover linear and non-linear circuits, A/D conversion techniques, active filters, signal generation, modulation and demodulation. Complete test circuits and methods. 474 pages. **\$15.00**

26. The Design of Digital Systems. John B. Peatman. Textbook for students desiring to develop a creative approach design capability through digital systems approach. Answers these question: Under what circumstances it is desirable to implement a system digitally? What are some of the components available for implementing the system? How do we go about designing it? 448 pages. **\$15.50**

31. Solid-State Electronics. Hibberd. A Basic Course for Engineers and Technicians. An extremely practical reference book for anyone who wants to acquire a good but general understanding of semiconductor principles. Features questions and answers, problems to solve. 1968. 169 pp. **\$9.95**

32. Circuit Design for Audio, AM/FM, and TV. Texas Instruments. Texas Instruments Electronics Series. Discusses the latest advances in design and application which represent the results of several years research and development by TI communications applications engineers. Emphasizes time- and cost-saving procedures. 1967. 352 pp. **\$14.50**

35. An Alphabetical Guide to Motion Picture, Television, and Videotape Productions. Levitan. This all-inclusive, authoritative, and profusely illustrated encyclopedia is a practical source of information about techniques of all kinds used for making and processing film and TV presentations. Gives full technical information on materials and equipment, processes and techniques, lighting, color balance, special effects, animation procedures, lenses and filters, high-speed photography, etc: 1970. 480 pp. **\$24.50**

40. Radio Transmitters. Gray and Graham. Provides, in a logical, easy-to-understand manner, a working knowledge of radio transmitters for quick solution of problems in operation and maintenance. 1961. 462 pp. **\$16.00**

23. Wide Screen Cinema & Stereophonic Sound. M.Z. Wystozky. First published in USSR in 1965 this excellent English translation covers wide gauge films, panoramic films, circular panoramic cinematography; technical fundamentals of stereo sound recording for film, as well as details of the Soviet systems now in use. 284 pages. **\$15.00**

33. Noise Reduction. Beranek. Designed for the engineer with no special training in acoustics, this practical text on noise control treats the nature of sound and its measurement, fundamentals of noise control, criteria, and case histories. Covers advanced topics in the field. 1960. 752 pp. **\$19.50**

27. Noise & Vibration Control. Edit. by Leo L. Beranek. Practical design and regulatory information; formulas, choice of materials and structures, city codes and hearing protection; indispensable for design engineers, public officials who prepare regulations for noise control, safety and environmental engineers involved in noise and vibration controls. Covers data analysis, transmission of sound, psychophysiological design criteria, hearing damage risk, etc: Wealth of detail, comprehensive index and concise appendices. 650 pages. **\$29.50**

28. Environmental Acoustics. Leslie L. Doelle. Applied acoustics for those in environmental noise control who lack specialized acoustical training. Basic information in comprehensible and practical form for solving straightforward problems. Explains fundamental concepts; pure theory minimized. Practical applications stressed, acoustical properties of materials and construction listed, actual installations with photos and drawings. Appendixes illustrate details of 53 wall types and 32 floor plans and other useful data. 246 pgs. **\$18.50**

21. Acoustics—Room Design and Noise Control. Michael Rettinger. 1968. The enormous problems and hazards presented by noise are dealt within an orderly and practical manner. With many charts, graphs, and practical examples, the text covers the physics of sound, room acoustics, and design, noise and noise reduction. 392 pages. **\$17.50**

22. Acoustics of Studios and Auditoria. V.S. Mankovsky. Basic theory plus a mass of design data covers the field with special reference to studios and places of public performance. For acoustical designers and specialists in sound transmission in cinema and broadcasting. Features exhaustive treatment of studio acoustics by the statistical, geometric and wave methods in parallel. 416 pgs. **\$15.00**

Sagamore Publishing Company, Inc.
980 Old Country Road,
Plainview, N.Y. 11803

Please send me the books I have circled below. My full remittance in the amount of \$_____ is enclosed. N.Y. State residents add 7% sales tax.

1	2	3	4	5	6	7	8	9	10	11
12	13	14	15	16	17	18	19	20		
21	22	23	24	25	26	27	28	29		
30	31	32	33	34	35	36	37	38		
39	40									

Name _____

Address _____

City _____

State _____ Zip _____

Special Instructions _____

Canada and foreign: Add \$1.00 per book

CLASSIFIED

FOR SALE

NEW YORK'S LEADING supplier of professional recording equipment and hi-fi stereo components. All major brands in stock. Call for quote—sales—service—leasing—trade-ins. **Martin Audio, 320 West 46th Street, New York, N.Y. 10036. Telephone: (212) 265-6470.**

AMERICA'S LARGEST SELECTION of new and used broadcast and recording equipment! Latest bulletins available. **The Maze Corporation, P.O. Box 6636, Birmingham, Ala. 35210.**

WHATEVER YOUR EQUIPMENT NEEDS—new or used—check us first. Trade your used equipment for new. Write for our complete listings. **Broadcast Equipment & Supply Co., Box 3141, Bristol, Tenn. 37620.**

SOLID-STATE AUDIO MODULES. Console kits, power amplifier kits, power supplies. Octal plug-ins—mic, eq, line, disc, tape play, tape record, amplifiers. Audio and tape bias oscillators. Over 50 audio products, send for free catalog and applications. **Opamp Labs. Inc., 172 So. Alta Vista Blvd., Los Angeles, Ca. 90036. (213) 934-3556.**

HAECO announces complete repair service and overhaul for all Westrex cutterheads. Conversions of 3D-II and older models to higher performance standards and reliability. Helium cooling systems and hi-temp coils can protect your investment. Repair insurance program available. Rapid service. Lower cost. **HAECO, 14110 Aetna, Van Nuys, California 91401.**

SCULLY TAPE RECORDERS—one to twenty-four track and model 270 auto players, many models in stock for immediate delivery. SCULLY LATHES—Previously owned and rebuilt. Variable or automatic pitch. Complete cutting systems with Westrex heads. MIXING CONSOLES—Custom designed using Weigand Audio Lab modules. From \$7,000.00. **Weigand Audio Laboratories, R.D. 3, Middleburg, Pa. 17842. Phone (717) 837-1444.**

IN THE NORTHEAST it's Audiotechniques for STANDARD TAPE LABORATORY test tapes. We think they're the most dependable, accurate reference tapes available. Call Ham Brosious or Bob Berliner and find out why. **Audiotechniques, 121 Hamilton Avenue, Stamford, Conn. 06902. Phone (203) 359-2312.**

ALTEC 1567A MIXERS, transformers in/out—\$225.00; 311B horns—\$75.00; 291-16 drivers—\$110.00; 2036 horns—\$110.00; 9473A compressor—\$300.00. Crown D40—\$175.00; 30-30—\$150.00; DC-300—\$450.00. C/M x-over—\$100.00; Shure M-63—\$65.00. **Nightshade & Dark Productions, P.O. Box 511, Scarsdale, N.Y. 10583. (914) 703-8593 or 703-3959.**

FAIRCHILD LUMITEN PANPOTS (8) with rack card file; CBS Labs 421 stereo Votumax peak limiter. **Studio EAST, 832 N. Van Buren, Milwaukee, Wisconsin 53202. (414) 271-0404.**

LANGEVIN AM4A CONSOLE, 8 input, 2 output, wired for 14 input, 4 output. Mint condition, less than eighteen months old. Believe it or not, equipment was installed in a bedroom and received only minor use and tender loving care. Went for just under \$7000 new. Best offer takes it home. Write or call **Alan Kubicka, P.O. Box 135 Roselle, Illinois 60172. (312) 529-1001.**

AUDIO RESEARCH, Otari, Transtatic Infinity, Dayton Wright, I.M.F., B & W, Quad, EPI, Braun, B & O, Citation, Sinclair, Phase Linear. **Transcendental Audio, 1214 Walden, Buffalo, N.Y. 14211. (716) 897-3984.**

SPECIAL—NEW FIDELIPAC NAB cart-ridges, 10 secs to 6 minutes. Only \$1.25 each. Minimum quantity 50 carts. Specify lengths when ordering. **Gately Electronics, 57 W. Hillcrest Avenue, Havertown, Pa. 19083.**

FM TUNER/RECEIVER alignment. Free checkout for distortion, frequency response, separation (see June-July 1970 issues of Audio). Complete FM tuner alignment \$20 plus parts. One year guarantee. FOB **A. L. Boynton, 369 Aklan Ct., San Jose, Ca. 95119.**

AMPEX 351-2-X. Especially-built high-performance machine with many extras. Includes portable case plus walnut verticle cabinet, spare motor, etc.—\$1400. Also Altec 1567A mixer, G-R 650A bridge, MDC 300 'scope and two Schoeps CMT46 mics. **Francis Daniel, 201 West 89th St., New York, N.Y. 10024. (212) 874-0590.**

IN THE NORTHEAST it's Audiotechniques for MCI 8-16-24 track recorders. The performance is superb, the price is right and the delivery is fast! What else do you want? You're right . . . service! That's Bob Berliner's job, and there's none better. **Audiotechniques, 121 Hamilton Avenue, Stamford, Conn. 06902. (203) 395-2312.**

SAVE MONEY—Top quality low noise tape. 1/2" x 2500 ft. polyester on NAB reel—\$8.50. 1" x 2500 ft. polyester on hubs—\$11.50. 2" x 3600 ft. on prec. reel—\$32.00. Also Scotch 150, Ampex 600, Reeves 1 mil Mylar 1/4" x 3600 ft. on fiber glass reel, no boxes, in bulk excellent duplicator stock—\$2.00 each in lots of 100. Quantity discount. Full return privilege. FOB N.Y.C. warehouse. **Selex Corporation, 61 Grove St., New York, N.Y. 10014. (212) 242-8003.**

ASSUME PAYMENTS. Quad-Eight 1682, 10 in 8 out. AG-440-B. Write for details c/o **P.O. Box 40603, Nashville, Tenn. 37204.**

ONE STOP FOR ALL your professional audio requirements. Bottom line oriented. **F.T.C. Brewer Company, P.O. Box 8057, Pensacola, Florida 32505.**

SAVE ON YOUR STYLUS COSTS! World's finest recording styli for all Westrex 3D models and HAECO SC-2. \$12.80 unwired, \$13.80 wired. Quantity purchases at additional savings. Satisfaction guaranteed. Send check or money order with your order to **HAECO, 14110 Aetna St. Van Nuys, Ca. 91401.**

ELECTRODYNE CONSOLE, 12 in/8 out, custom walnut with production area. Two-channel cue system with Crown D-40 amplifier. Marantz monitor amps. Make offer. Two nuvistor U-47's with power supplies, good condition—\$225.00 each. **Bob Schultz, Micside Inc., 2541 Nicollet Avenue, Minneapolis, Minn. 55404. (612) 827-5441.**

FOR SALE: Established sound contracting company. Franchises on major lines with excellent acceptance of equipment and personnel by area architects and engineers. This is the dominant company in the area doing the major share of work in hospital/nursing home, school-intercom and high-quality sound-reinforcement fields. Sale includes company owned building and vehicles. Buyer must be acceptable to franchising manufacturers, must be technically capable, and financially responsible. Write **Box 9-A, db Magazine, 980 Old Country Road, Plainview, N.Y. 11803.**

EMPLOYMENT

SAN DIEGO COUNTY, 4255 miles of "Heaven on Earth" Swim, sail, 66 golf courses, Sea World SD Zoo, major league sports, U.S. 12th largest city, mean temperature 66°. Wanted salesmen experienced in sound, I/C, matv, cctv, security systems—design and sales. Work in above environment. Product lines Altec, McMartin, Webster, University, B-T, GBC, Javlin. Share profits! Resumé to **S. G. Barnes, Communications Co., Inc., 3490 Noell St., San Diego, Ca. 92110.**



CATV—MATV PRODUCTS

- CONNECTORS
- WALLPLATES
- SPLITTERS
- AMPLIFIERS



AVA ELECTRONICS CORP.

416 LONG LANE, UPPER DARBY PA 19082
215-MA 6 9100

PEOPLE, PLACES, HAPPENINGS

● Word from **Rupert Neve Inc.** announces the opening of a new office in Hollywood, California, and the appointment of **John Marston** as Los Angeles sales manager. The office is located at 1800 North Highland Avenue, Suite 616.

In another announcement from Neve we learn that **Arthur A. Schubert Jr.** has joined the U.S. division of the Cambridge, England-based company as chief engineer. He will be responsible for the technical management of the corporation. Mr. Schubert comes to Neve from CBS where he was a senior project engineer.


● Two appointments at **Westrex**: **Ken Tanzawa** has been appointed vice-president, general-manager of the Westrex division of **Litton Industries**. With his headquarters in Tokyo, he will be responsible for all Westrex activities in the far east.

Peter Buck has been appointed executive vice-president. He will direct all Westrex activities outside the United States. Since joining Westrex in 1946 as a recording engineer, he has served as general manager and director for several regional offices in the far east, Australia, and Europe. He is presently headquartered in London.



Clark

● **Robert J. Brown**, general sales manager from the **Mincom Division of 3M** has announced the appointment of **Paul B. Clark Jr.** as western area manager. Mr. Clark has served as a sales engineer and supervisor for the division's instrumentation, professional audio, electron beam, and video products. He succeeds **Bob R. Boatman**, who has been named area manager of a newly-established southeastern sales region with headquarters in Dallas, Texas. Mr. Clark will headquarter in Camarillo.



Kramer


● **Karl Kramer** has recently joined **Midwest Audio Corporation** of Chicago as manager, manufacturing. His responsibilities at Midwest will include engineering, procurement, and all phases of manufacturing. Midwest is a designer and producer of specialized sound systems for the transportation industry. Mr. Kramer comes to the company from **Jensen Manufacturing** where he held top managerial and technical positions for a number of years.

● **Donald F. Smith** has been named director of sales for the recording automation group of **Dictaphone Corporation**, comprising the **Scully** and **Metrotech** divisions. He replaces **Edward Ittner** who has left Dictaphone to join another company. Mr. Smith comes to Dictaphone from **Ampex** where he held several executive sales positions.

● The **Fourteenth Acoustical Training School**, conducted by **Michael J. Kodaras** and **Robert Lindahl**, acoustical consultants, will be held at the **Dearborn Inn**, Dearborn, Michigan on October 30, 31, and November 1, 1972. The three-day session will be devoted to acoustics, lighting, and air distribution of interior systems as well as general principles of architectural acoustics, sound transmission loss, acoustical correction of rooms, industrial noise, and noise control of air conditioning. Numerous workshop sessions will permit those attending to obtain first-hand experience in solving basic problems. The number of registrants is limited; previous sessions have been oversubscribed. Information on the sessions can be had from Robert Lindahl, P.E., 2261 Winthrop Road, Trenton, Michigan 48183 or Michael J. Kodaras, 75-02 51st Avenue, Elmhurst, N.Y. 11373.

● Late word just in: Fire of accidental origin swept the studios of **Sound Exchange** at 265 West 54th Street in New York City. Damage was extensive. What the fire itself didn't do, smoke, and water trying to put it out did. It looks awful. But just as the legendary Phoenix, we look to Sound Exchange to rise from the ashes more beautiful and better equipped than before.

● Word from **Bill Putnam**, chairman and president of the **URC companies** is that **Don Sears**, founder and president of **Sound Recorders, Inc.** and **Seco Laboratories**, both in Omaha, Nebraska has been named vice-president and general manager of all studio operations of the **United Recording Corporation**, headquartered in Hollywood, California. In making the announcement, Mr. Putnam pointed out that this includes all subsidiary studio operations at **Western Recorders** in Hollywood, and **Coast Recorders** in San Francisco. Mr. Sears in turn has also made an announcement—**Ron Ubel**, former second in command at the Omaha facilities will now be a vice-president and general manager there.



Lambrecht

● **Heinz Lambrecht** has been made national sales manager of broadcast and commercial products for **Telex**. He will supervise dealer as well as OEM sales and will report directly to **Sidney T. Kitrell**, director of marketing for aircraft/broadcast and industrial products for the company. Mr. Lambrecht comes from twelve years experience in commercial sound and communications. He was formerly with **Webster Electric Company** in Racine, Wisconsin, as design engineer, field sales engineer, and finally, sales manager.



TeleSessions

exclusively for **db** readers

How many times have you read an unusually stimulating article in **db** and wished you could trade ideas with others involved in that area? (People who share your problems and speak your language, who are full of surprising insights and new ideas.)

Although group discussions like this happen at conferences, and at chance meetings, our readers have been telling us they want it to happen more often and more conveniently.

THE ELECTRONIC MEETING

Now, without leaving your desk, you can have this kind of valuable, informal discussion. Without the time and expense of travel, either. Group telephone conferences are held in connection with selected **db** articles—and we keep each group *small*. For articles that generate tremendous TeleSession* interest, we'll schedule as many separate small group sessions as required.

So readers most interested in each article can dial into an hour-long, freewheeling discussion and build on each other's ideas. TeleSession Company provides the unique telephone conference system that repeals geography. Our editors pick the topics and invite authors or guest experts—whenever appropriate.

A SURPRISING EXPERIENCE

You'll find this specially engineered conference system and the group dynamics different from any "conference call" you may have experienced. You dial in over ordinary phone lines from *anywhere* in the country you happen to be at session time. You're greeted by a session host who introduces everyone and gets things started. Everyone on the line can ask questions, explore ideas (it's amazing how one new idea leads to another), or just listen.

You'll find, even in your first few minutes, that **db** TeleSessions are more interactive and informal than face-to-face discussions. You always know who's talking, because participants say their first names. You drop formalities and simply chime in whenever you have a comment. Yet there are surprisingly few interruptions.

The result is a stimulating and orderly discussion. We've discovered that the participants are willing to reveal the best of their knowledge and ask questions when they don't know something. So what you get is a chain reaction of ideas. One person's knowledge complements everyone

else's—though each person forms his own conclusions. Complete strangers end up talking as though they've known each other for years—and wanting to call on each other's expertise again. So far, there've been over 700 TeleSessions.

HOW TO RESERVE YOUR TELESESSION "SEAT"

Whenever you find a **db** article especially intriguing that is marked for TeleSession discussion, we hope you will accept our invitation to participate with others who feel the same way. Simply fill out the reservation card and mention the topic for which you wish to reserve a "seat". We'll promptly reserve a line for you and advise you of your group's scheduled date and time. (If the time we send you conflicts with your schedule you may call 212/725-2525 and we'll immediately give you an alternate.)

Be sure to mark the scheduled meeting hour we send you in your appointment book; then when your session time arrives simply place a station-to-station call from wherever you are that day to 212/725-2525. Your session host will greet you and then after a few informal introductions you'll find yourself in one of the most productive meetings you've ever experienced.

Wherever you are that day, you can fit the TeleSession hour into whatever you're doing. There's no time lost, no travel or lodging expense.

THE COST

We think the fresh viewpoints you share in the first session will prove this to be the most cost-effective form of consulting you ever experienced. It's just thirty dollars for each TeleSession, plus the cost of your simple station-to-station phone call. You may cancel up to five days before the session or have someone else take your "seat." If for any reason your **db** TeleSession isn't everything we've said it is, merely state the reason for your disappointment on the invoice, return it and owe nothing.

A MAGAZINE WITH AN INTERACTIVE FEEDBACK SYSTEM

A provocative article. A small interdisciplinary group of professionals like you. A uniquely stimulating and convenient meeting environment. You owe it to yourself to give it a try. We look forward to welcoming you. Pick one of the articles marked for TeleSession and send in the attached card.

db TeleSessions
980 Old Country Rd.
Plainview, N.Y. 11803
212/725-2525



Please reserve my "seat" in the first available TeleSession group

on the topic: _____

Name _____

Company _____

Title _____

Address _____

City / State _____ Zip _____ Phone () _____

☐ Check enclosed for \$30.00. ☐ Bill (me) (company)

Signed _____



RE 15

RE 10

RE 11

RE 16

NEW Model RE10 \$166.00 shown on Model 421 desk stand \$20.00. Model RE15 \$283.00 shown with Model 307 suspension mount \$37.00. NEW Model RE11 \$177.50, shown with Model 311 snap-out stand adapter \$7.00. NEW Model RE16 \$294.50, shown on Model 421 desk stand \$20.00. List prices shown. Normal trade discounts apply.

Freedom of choice!

Ey Professional sound has entered a new era. It started with the Electro-Voice Model RE15. And now there are four E-V dynamic cardioid microphones that share its distinctive advantages — with some unique benefits of their own.

Unaffected by Distance . . . Angle

Basic to all of these microphones is Exclusive Electro-Voice Continuously Variable-D* construction. Now it offers something you've never heard before with any microphone: no matter what you do, microphone response never varies!

Whether performers almost swallow the microphone, wander far off-mike . . . or even move around to the back . . . you'll still get the same smooth response. Only the level changes.

Once you set equalization it remains constant. You have full assurance that tonal balance won't change between the dress rehearsal and the final performance, no matter what the talent does.

Improved Cardioid Pattern

Only acoustics and noise can limit you. Yet even here these new E-V microphones gain an advantage from the super-cardioid pattern that provides better sound control than ordinary cardioids. With maximum rejection 150° off axis, it is easier to eliminate unwanted sound while maintaining normal stand or boom microphone positions. There's also an integral bass-tilt circuit to cut rumble below 100 Hz. when needed.

Now Select from Four Models

In addition to the original RE15, we've added the RE16. The same fine microphone with an external "pop" filter to solve the problems of ultra-close miking.

The new RE10 is the economy version of the RE15. The same concept and quality, but for slightly less rigid requirements. And the RE11 is the lower cost twin to the RE16.

These four great cardioid microphones give you new freedom to head off sound problems before they start. Your E-V microphone headquarters has them waiting. Choose today.

*U.S. Patent No. 3,115,207. Trade mark registered.

ELECTRO-VOICE, INC., Dept. 921BD,
686 Cecil Street, Buchanan, Michigan 49107

high fidelity systems and speakers • tuners, amplifiers, receivers • public address loudspeakers
microphones • phono needles and cartridges • space and defense electronics

Circle 12 on Reader Service Card

www.americanradiohistory.com

Electro-Voice®

A SUBSIDIARY OF GULTON INDUSTRIES, INC.