


## TUNG-SOL

## BEAM PENTODE



GLASS BULB


COATED UNIPOTENTIAL CATHODE

HEATER

25.0 VOLTS 0.3 AMP.

AC OR DC

ANY MOUNTING POSITION


 BOTTOM VIEW  
 INTERMEDIATE SHELL  
 7 PIN OCTAL  
 6AM

THE 25BQ6GT IS A BEAM PENTODE DESIGNED SPECIFICALLY FOR USE AS A HORIZONTAL DEFLECTION AMPLIFIER IN TELEVISION RECEIVERS USING MAGNETIC DEFLECTION. THE PLATE IS BROUGHT OUT TO A TOP CAP FOR ISOLATION OF THE HIGH VOLTAGE AND CONVENIENCE IN CIRCUIT LAYOUT. ITS ELECTRICAL CHARACTERISTICS ARE SUCH AS TO PROVIDE GOOD PERFORMANCE WHERE THE SUPPLY VOLTAGES ARE LIMITED.

 DIRECT INTERELECTRODE CAPACITANCES  
 WITH NO EXTERNAL SHIELD

|                                                   |      |     |
|---------------------------------------------------|------|-----|
| GRID TO PLATE: (G <sub>1</sub> TO P)              | 0.95 | μuf |
| INPUT: G <sub>1</sub> TO (H+K&BP+G <sub>2</sub> ) | 14   | μuf |
| OUTPUT: P TO (H+K&BP+G <sub>2</sub> )             | 9.5  | μuf |

RATINGS - ABSOLUTE VALUES<sup>A</sup>
 HORIZONTAL DEFLECTION AMPLIFIER  
 FOR OPERATION IN A 525 LINE, 30 FRAME SYSTEM<sup>B</sup>

|                                                          |      |        |
|----------------------------------------------------------|------|--------|
| HEATER VOLTAGE                                           | 25.0 | VOLTS  |
| MAXIMUM PEAK HEATER-CATHODE VOLTAGE                      | 200  | VOLTS  |
| MAXIMUM PLATE SUPPLY VOLTAGE <sup>C</sup>                | 600  | VOLTS  |
| MAXIMUM GRID #2 VOLTAGE                                  | 220  | VOLTS  |
| MAXIMUM NEGATIVE DC GRID #1 VOLTAGE                      | -55  | VOLTS  |
| MAXIMUM PLATE INPUT                                      | 35   | WATTS  |
| MAXIMUM PLATE DISSIPATION                                | 12   | WATTS  |
| MAXIMUM GRID #2 INPUT                                    | 2.8  | WATTS  |
| MAXIMUM PLATE CURRENT                                    | 110  | MA.    |
| MAXIMUM PEAK POSITIVE PLATE SURGE VOLTAGE <sup>D</sup>   | 5500 | VOLTS  |
| MAXIMUM PEAK NEGATIVE GRID #1 SURGE VOLTAGE <sup>D</sup> | -150 | VOLTS  |
| MAXIMUM GRID #1 CIRCUIT RESISTANCE                       | 0.6  | MEGOHM |

<sup>A</sup> ABSOLUTE MAXIMUM RATINGS ARE THE LIMITING VALUES ABOVE WHICH THE SERVICEABILITY OF THE TUBE MAY BE IMPAIRED FROM THE VIEWPOINT OF LIFE AND SATISFACTORY PERFORMANCE. THEREFORE, IN ORDER NOT TO EXCEED THESE ABSOLUTE RATINGS, THE EQUIPMENT DESIGNER HAS THE RESPONSIBILITY OF DETERMINING AN AVERAGE DESIGN VALUE FOR EACH RATING BELOW THE ABSOLUTE VALUE OF THAT RATING BY AN AMOUNT SUCH THAT THE ABSOLUTE VALUES WILL NEVER BE EXCEEDED UNDER ANY USUAL CONDITION OF LINE VOLTAGE VARIATION, MANUFACTURING VARIATIONS (INCLUDING COMPONENTS) IN THE EQUIPMENT ITSELF, OR ADJUSTMENTS OF CONTROLS.

<sup>B</sup> AS DESCRIBED IN "STANDARDS OF GOOD ENGINEERING PRACTICE CONCERNING TELEVISION BROADCAST STATIONS," FEDERAL COMMUNICATIONS COMMISSION.

<sup>C</sup> LIMITATION ON MAXIMUM DC PLATE SUPPLY POTENTIAL ESTABLISHED BY NO-SIGNAL PLATE DISSIPATION WHICH IN TURN IS DEPENDENT UPON CIRCUITRY.

<sup>D</sup> THE DUTY CYCLE OF THE VOLTAGE PULSE MUST NOT EXCEED 15% OF ONE SCANNING CYCLE AND ITS DURATION MUST BE LIMITED TO 10 MICROSECONDS.

CONTINUED ON FOLLOWING PAGE

## TUNG-SOL

CONTINUED FROM PRECEDING PAGE

## TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS



CLASS A<sub>1</sub> AMPLIFIER

|                                                       |       |       |
|-------------------------------------------------------|-------|-------|
| HEATER VOLTAGE                                        | 25.0  | VOLTS |
| HEATER CURRENT                                        | 0.3   | AMP.  |
| PLATE VOLTAGE                                         | 250   | VOLTS |
| GRID #2 VOLTAGE                                       | 150   | VOLTS |
| GRID #1 VOLTAGE                                       | -22.5 | VOLTS |
| PLATE CURRENT                                         | 55    | MA.   |
| GRID #2 CURRENT                                       | 2.1   | MA.   |
| TRANSCONDUCTANCE                                      | 5500  | μMHOS |
| G <sub>1</sub> TO G <sub>2</sub> AMPLIFICATION FACTOR | 4.5   |       |

HORIZONTAL DEFLECTION AMPLIFIER<sup>B</sup>  
FOR OPERATION IN A 525 LINE, 30 FRAME SYSTEM<sup>B</sup>


|                                                            | NOTE<br>E | NOTE<br>F | NOTE<br>G | NOTE<br>H |        |
|------------------------------------------------------------|-----------|-----------|-----------|-----------|--------|
| HEATER VOLTAGE                                             | 25.0      | 25.0      | 25.0      | 25.0      | VOLTS  |
| HEATER CURRENT                                             | 0.3       | 0.3       | 0.3       | 0.3       | AMP.   |
| POWER SUPPLY VOLTAGE:                                      |           |           |           |           |        |
| FROM DC SUPPLY                                             | 250       | 270       | 360       | 250       | VOLTS  |
| FROM DC BOOST                                              | 0         | 100       | 80        | 100       | VOLTS  |
| TOTAL SUPPLY VOLTAGE                                       | 250       | 370       | 440       | 350       | VOLTS  |
| OPERATING GRID #2 VOLTAGE                                  | 130       | 130       | 105       | 140       | VOLTS  |
| GRID #2 DROPPING RESISTOR                                  | 10 000    | 24 000    | 67 000    | 18 000    | OHMS   |
| CATHODE BIAS RESISTOR                                      | 47        | 100       | 100       | 43        | OHMS   |
| CATHODE BY-PASS CAPACITOR                                  | 10        | 10        | 10        | 10        | μf     |
| PEAK TO PEAK GRID<br>SIGNAL VOLTAGE (APPROX.) <sup>J</sup> | 75        | 75        | 75        | 75        | VOLTS  |
| PEAK FORWARD PLATE<br>VOLTAGE (APPROX.) <sup>K</sup>       | 2 500     | 3 600     | 4 500     | 3 000     | VOLTS  |
| PICTURE TUBE ANODE<br>VOLTAGE (APPROX.) <sup>K</sup>       | 10 000    | 10 000    | 10 000    | 10 000    | VOLTS  |
| PLATE CURRENT                                              | 90        | 60        | 60        | 99        | MA.    |
| GRID #2 CURRENT                                            | 12        | 10        | 5         | 11.5      | MA.    |
| GRID #1 CURRENT                                            | 30        | 30        | 40        | 30        | μA.    |
| GRID #1 RESISTANCE                                         | 0.47      | 0.47      | 0.47      | 0.47      | MEGOHM |
| PLATE DISSIPATION (APPROX.)                                | 6         | 8         | 8         | 8         | WATTS  |
| SWEEP WIDTH (12LP4<br>PICTURE TUBE)                        | 11.5      | 11.5      | 11.5      | 11.5      | INCHES |

<sup>B</sup>AS DESCRIBED IN "STANDARDS OF GOOD ENGINEERING PRACTICE CONCERNING TELEVISION BROADCAST STATIONS," FEDERAL COMMUNICATIONS COMMISSION.<sup>E</sup>DIRECT-COUPLED CIRCUIT USING HIGH-IMPEDANCE YOKE, (APPROX. 30 MH), HAZELTINE BULLETIN 7060 MODIFIED TO INCORPORATE CHARGING CHOKE WITH AUTO WINDING FOR HIGH VOLTAGE.<sup>F</sup>TRANSFORMER-COUPLED CIRCUIT USING 8.3 MH. YOKE AND RAY R33 TRANSFORMER OMITTING DAMPER LOAD RESISTOR.<sup>G</sup>TRANSFORMER-COUPLED CIRCUIT USING 8.3 MH. YOKE AND ELECTROMETRIC S-10-80 TRANSFORMER.<sup>H</sup>TRANSFORMER-COUPLED CIRCUIT USING G.E. 77J1 TRANSFORMER.<sup>J</sup>NEGATIVE PEAKING USED. ADJUST SHAPE OF GRID VOLTAGE FOR MINIMUM PLATE INPUT.<sup>K</sup>MEASURED WITH 100 μA TOTAL PICTURE TUBE DRAIN.PLATE  
2346  
FEB. 1  
1950

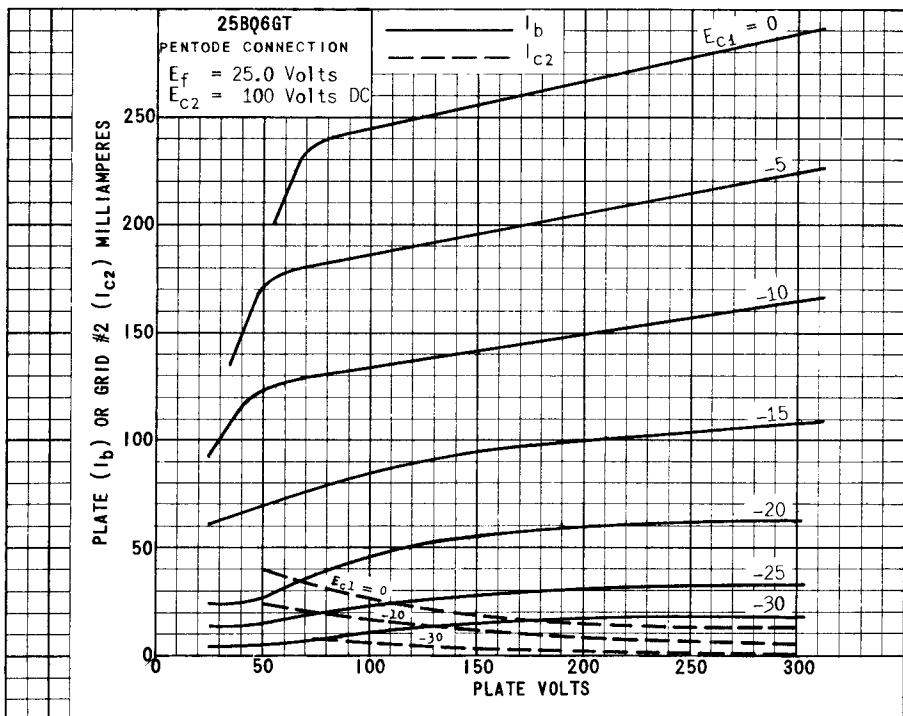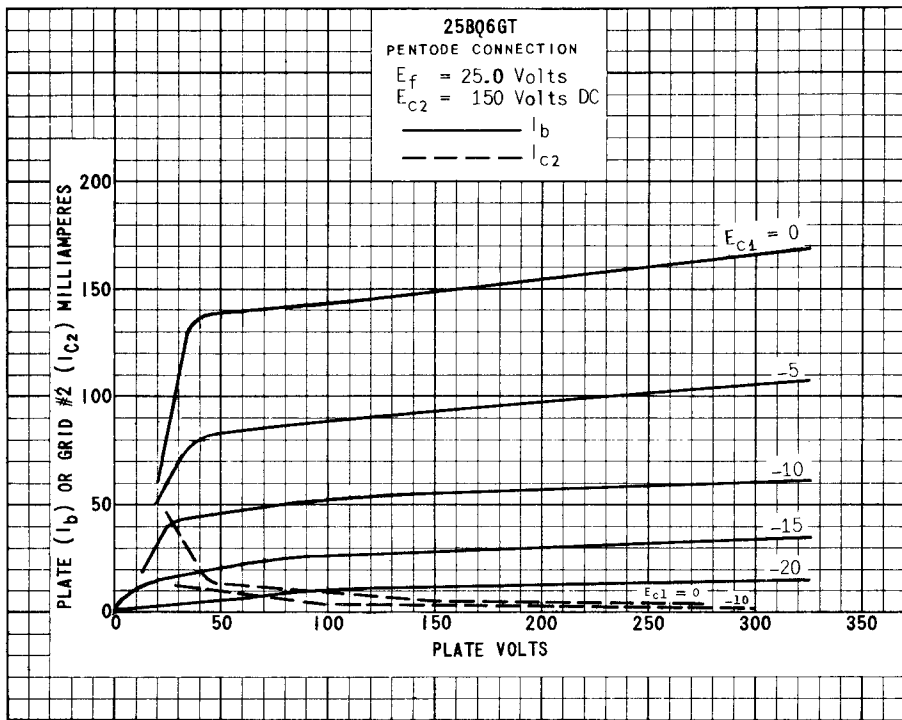

## TUNG-SOL

## BEAM PENTODE

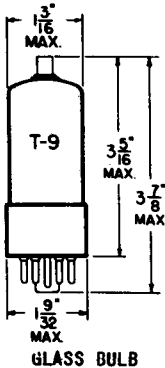


COATED UNIPOTENTIAL CATHODE

HEATER

25.0 VOLTS 0.3 AMP.

AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

INTERMEDIATE SHELL  
7 PIN OCTAL

6AM

THE 25BQ6GT IS A BEAM PENTODE DESIGNED SPECIFICALLY FOR USE AS A HORIZONTAL DEFLECTION AMPLIFIER IN TELEVISION RECEIVERS USING MAGNETIC DEFLECTION. THE PLATE IS BROUGHT OUT TO A TOP CAP FOR ISOLATION OF THE HIGH VOLTAGE AND CONVENIENCE IN CIRCUIT LAYOUT. ITS ELECTRICAL CHARACTERISTICS ARE SUCH AS TO PROVIDE GOOD PERFORMANCE WHERE THE SUPPLY VOLTAGES ARE LIMITED.

## DIRECT INTERELECTRODE CAPACITANCES

|                                  |     |                  |
|----------------------------------|-----|------------------|
| GRID #1 TO PLATE: ( $G_1$ TO P)  | 0.6 | $\mu\mu\text{f}$ |
| INPUT: $G_1$ TO ( $H+K+G_2+BP$ ) | 15  | $\mu\mu\text{f}$ |
| OUTPUT: P TO ( $H+K+G_2+BP$ )    | 7.5 | $\mu\mu\text{f}$ |

## RATINGS

INTERPRETED ACCORDING TO RMA STANDARD MB-210

HORIZONTAL DEFLECTION AMPLIFIER<sup>A</sup>

|                                                        |                  |            |
|--------------------------------------------------------|------------------|------------|
| HEATER VOLTAGE                                         | 25.0             | VOLTS      |
| MAXIMUM HEATER-CATHODE VOLTAGE:                        |                  |            |
| HEATER NEGATIVE WITH RESPECT TO CATHODE:               | 200              | VOLTS      |
| TOTAL DC AND PEAK                                      | 100              | VOLTS      |
| HEATER POSITIVE WITH RESPECT TO CATHODE:               | 200              | VOLTS      |
| DC                                                     | 100              | VOLTS      |
| TOTAL DC AND PEAK                                      | 200              | VOLTS      |
| MAXIMUM DC PLATE SUPPLY VOLTAGE (BOOST + POWER SUPPLY) | 550              | VOLTS      |
| MAXIMUM PEAK POSITIVE PLATE VOLTAGE (ABSOLUTE MAXIMUM) | 5 500            | VOLTS      |
| MAXIMUM PEAK NEGATIVE PLATE VOLTAGE                    | 1 250            | VOLTS      |
| MAXIMUM PLATE DISSIPATION <sup>B</sup>                 | 11               | WATTS      |
| MAXIMUM PEAK NEGATIVE GRID #1 VOLTAGE                  | 300              | VOLTS      |
| MAXIMUM DC GRID #2 VOLTAGE                             | 175              | VOLTS      |
| MAXIMUM GRID #2 DISSIPATION                            | 2.5              | WATTS      |
| MAXIMUM AVERAGE CATHODE CURRENT                        | 110              | MA.        |
| MAXIMUM PEAK CATHODE CURRENT                           | 400              | MA.        |
| MAXIMUM GRID #1 CIRCUIT RESISTANCE                     | 0.47             | MEGOHM     |
| MAXIMUM BULB TEMPERATURE (AT HOTTEST POINT)            | 220 <sup>0</sup> | CENTIGRADE |

<sup>A</sup> FOR OPERATION IN A 525-LINE, 30-FRAME SYSTEM AS DESCRIBED IN "STANDARDS OF GOOD ENGINEERING PRACTICE FOR TELEVISION BROADCASTING STATIONS; FEDERAL COMMUNICATIONS COMMISSION". THE DUTY CYCLE OF THE VOLTAGE PULSE NOT TO EXCEED 15 PERCENT OF A SCANNING CYCLE.

<sup>B</sup> IN STAGES OPERATING WITH GRID-LEAK BIAS, AN ADEQUATE CATHODE BIAS RESISTOR OR OTHER SUITABLE MEANS IS REQUIRED TO PROTECT THE TUBE IN THE ABSENCE OF EXCITATION.

CONTINUED ON FOLLOWING PAGE

→ INDICATES A CHANGE OR ADDITION.

## TUNG-SOL

CONTINUED FROM PRECEDING PAGE

## TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

CLASS A<sub>1</sub> AMPLIFIER

|                                          |        |       |
|------------------------------------------|--------|-------|
| HEATER VOLTAGE                           | 25.0   | VOLTS |
| HEATER CURRENT                           | 0.3    | AMP.  |
| PENTODE CONNECTION: <sup>C</sup>         |        |       |
| PLATE CURRENT                            | 55     | MA.   |
| GRID #2 CURRENT                          | 2.1    | MA.   |
| TRANSCONDUCTANCE                         | 5 500  | μMHOS |
| PLATE RESISTANCE                         | 20 000 | OHMS  |
| ZERO-BIAS: <sup>D</sup>                  |        |       |
| PLATE CURRENT                            | 225    | MA.   |
| GRID #2 CURRENT                          | 25     | MA.   |
| CUT-OFF: <sup>E</sup>                    |        |       |
| GRID #1 VOLTAGE (APPROX.)                | -46    | VOLTS |
| TRIODE AMPLIFICATION FACTOR <sup>F</sup> | 4.3    |       |

<sup>C</sup> WITH  $E_b = 250$  VOLTS,  $E_{c2} = 150$  VOLTS AND  $E_{c1} = -22.5$  VOLTS.<sup>D</sup> WITH  $E_b = 60$  VOLTS AND  $E_{c2} = 150$  VOLTS.<sup>E</sup> FOR  $I_b = 1$  MA. WITH  $E_b = 250$  VOLTS AND  $E_{c2} = 150$  VOLTS<sup>F</sup> WITH  $E_b = E_{c2} = 150$  VOLTS AND  $E_{c1} = -22.5$  VOLTS.

→ INDICATES A CHANGE OR ADDITION.

