


B 2006

B 2006

TRIODE

(E)

V _f	=	20	.V
I _f	=	0,18	A.
V _{a(max)}	=	200	V.
I _a	=	15	mA.
V _{g1}	=	-18	V.
S(max)	=	2,5	mA/V.
S(norm)	=	1,6	mA/V.
g	=	6	
R _{i(norm)}	=	4.000	Ω
R _a	=	16.000	Ω
R _k	=	1.200	Ω
W _{a(max)}	=	3	W _{tt.}
W _{o(10%)}	=	0,2	W _{tt.}

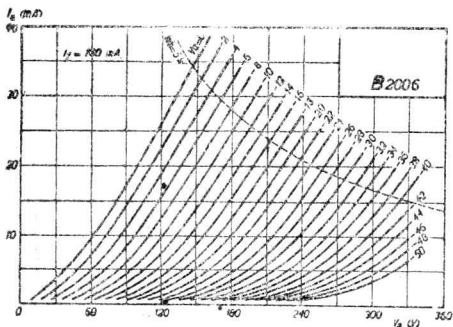

B2006