


B 2099

B 2099

TRIODE

(LF_w)

V_f	=	20	V.
I_f	=	0,18	A.
$V_a(max)$	=	200	V.
I_a	=	0,2	0,08 mA.
V_{gl}	=	—1,6	V.
$S(max)$	=	3,0	mA/V.
g	=	99	
$R_i(norm)$	=	0,1	0,33 M. Ω
R_a	=	1	0,3 M. Ω
C_{ag1}	=	1,5	$\mu\mu F.$

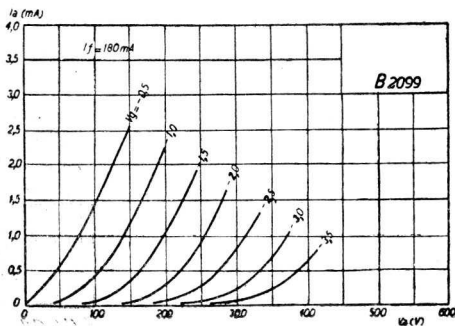

B 2099