



C 405

C 405

TRIODE  
(E)

$V_f$	=	4,0	V.
$I_f$	=	0,3	A.
$V_a(\max)$	=	250	V.
$I_a$	=	20	mA.
$V_{g1}$	=	-32	V.
$S(\max)$	=	2,0	mA/V.
$S(\text{norm})$	=	1,9	mA/V.
$g$	=	5	
$R_i(\text{norm})$	=	2.600	$\Omega$
$R_a$	=	5.200	$\Omega$
$R_k$	=	1.600	$\Omega$
$W_a(\max)$	=	5	Wtt.
$W_o(10\%)$	=	1,1	Wtt.
$C_{agl}$	=	4,8	$\mu\mu\text{F.}$

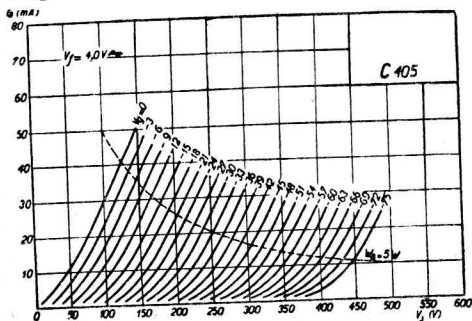

C 405