



D 404

D 404

TRIODE

(E)

V_f	=	4,0	V.
I_f	=	0,65	A.
$V_a(\max)$	=	250	V.
I_a	=	40	mA.
V_{g1}	=	-40	V.
$S(\max)$	=	3,5	mA/V.
$S(\text{norm})$	=	2,7	mA/V.
g	=	3,5	
$R_i(\text{norm})$	=	1.300	Ω
R_a	=	3.500	Ω
R_k	=	1.000	Ω
$W_a(\max)$	=	10	Wtt.
$W_o(10\%)$	=	1,7	Wtt.
C_{ag1}	=	7	$\mu\mu\text{F.}$

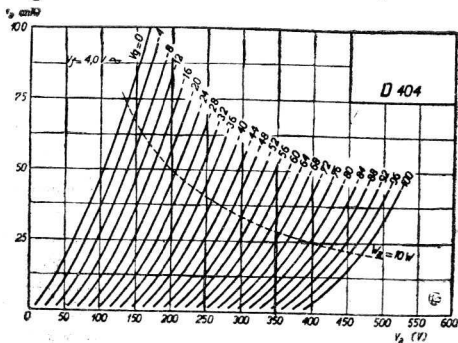

D 404