



31

# TRIODE (E)

31

$V_f$	=		2,0	V.
$I_f$	=		0,13	A.
$V_a$	=	135	180(max)	V.
$V_g$	=	-22,5	-30	V.
$I_a$	=	8,0	12,3	mA.
$g$	=	3,8	3,8	
$R_i$	=	4.100	3.600	$\Omega$
$S$	=	0,925	1,05	mA/V.
$W_o$	=	0,18	0,375	Wtt.
$R_a$	=	7.000	5.700	$\Omega$
$R_k$	=	2.815	2.440	$\Omega$

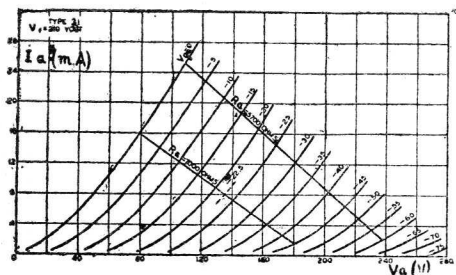

3/